

Driver LCAI 65W 150mA–400mA ECO INDUSTRY sI
premium series non-SELV

**Product description**

- _ Dimmable constant current built-in LED driver, particularly suitable for industrial applications in tough environments such as cold warehouses or factories with elevated ambient temperatures
- _ The LED driver is designed for a lifetime stated above under reference conditions and with a failure probability of less than 10 %
- _ If being operated up to 50 °C ambient temperature for 100,000 h the LED driver offers a lower failure probability of less than 2.5 %
- _ Dimming range 1 to 100 %
- _ Output current adjustable between 150 – 400 mA
- _ Max. output power 65 W
- _ Suitable for mains voltage peaks (burst/surge) up to 4 kV
- _ Expanded temperature range of -40 ... +70 °C
- _ Nominal lifetime up to 100,000 h
- _ 8 years guarantee (conditions at <https://www.tridonic.com/manufacture-guarantee-conditions>)

Housing properties

- _ White slim metal casing
- _ Type of protection IP20

Interfaces

- _ DALI Device Type 6
- _ DSI
- _ switchDIM (with memory function)
- _ corridorFUNCTION

Functions

- _ Adjustable output current in 1-mA-steps (I-SELECT resistor or DALI)
- _ Power-up fading at AC
- _ Intelligent Temperature Guard (overtemperature protection)
- _ Short-circuit protection
- _ Overload protection
- _ Constant light output function
- _ Suitable for emergency escape lighting systems acc. to EN 50172
- _ Intelligent Voltage Guard (overvoltage and undervoltage monitoring)

Website

<http://www.tridonic.com/28000348>



Spotlights



Downlights



Linear



Area



Floor | Wall



Free-standing



Street




Decorative



High bay

premium series non-SELV

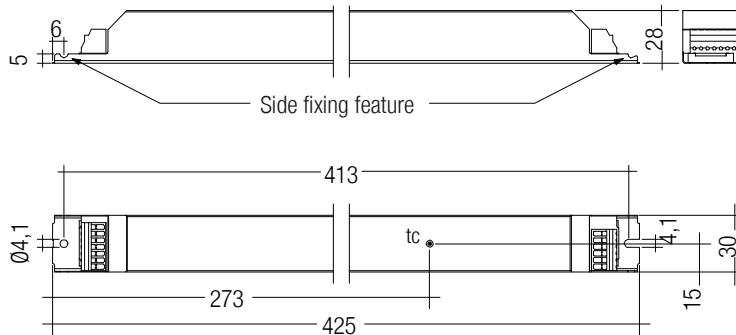

Ordering data

Type	Article number	Packaging, carton	Packaging, pallet	Weight per pc.
LCAI 65W 150mA-400mA ECO INDUSTRY sl	28000348	10 pc(s).	480 pc(s).	0.411 kg

Technical data

Rated supply voltage	220 – 240 V
AC voltage range	198 – 264 V
DC voltage range	176 – 280 V
Mains frequency	0 / 50 / 60 Hz
Overvoltage protection	320 V AC, 48 h
Typ. rated current (at 230 V, 50 Hz, full load) ①②	323 mA
Typ. current (220 V, 0 Hz, full load, 15 % dimming level) ②	56 mA
Leakage current (PE)	< 0.27 mA
Max. input power	72.8 W
Typ. efficiency (at 230 V, 50 Hz, full load) ②	> 90 %
λ (at 230 V, 50 Hz, full load) ①②	0.98
Typ. power consumption on stand-by ③	0.123 W
THD (at 230 V, 50 Hz, full load) ①	< 5.3 %
Starting time (at 230 V, 50 Hz, full load) ①	< 0.6 s
Starting time (DC mode)	< 0.2 s
Switchover time (AC/DC) ④	< 0.2 s
Turn off time (at 230 V, 50 Hz, full load)	< 50 ms
Hold on time (at 230 V, 50 Hz, full load) ⑤	20 ms
Output current tolerance ①⑥	± 3 %
Max. output current peak (non-repetitive)	≤ output current + 18 %
Output LF current ripple (< 120 Hz)	< 2 %
Output P_ST_LM (at full load)	≤ 1
Output SVM (at full load)	≤ 0.4
Max. output voltage (U-OUT)	250 V
PWM frequency ⑦	500 Hz
Dimming range	1 – 100 %
Dimming range (without PWM)	35 – 100 %
Mains surge capability (between L - N)	4 kV
Mains surge capability (between L/N - PE)	4 kV
Surge voltage at output side (against PE)	< 0.5 kV
Type of protection	IP20
Lifetime	up to 100,000 h
Guarantee (conditions at www.tridonic.com)	8 Year(s)
Dimensions L x W x H	425 x 30 x 28 mm

Approval marks



Standards

EN 55015, EN 60068-2-27, EN 60068-2-64, EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-13, EN 62384, EN 61547, EN 62386-101, EN 62386-102, EN 62386-207 (DALI-2)

Specific technical data

Type	Output ^① current	Min. output voltage	Max. output ^② voltage	Max. output ^③ power	Typ. power consumption (at 230 V, 50 Hz, full load)	Typ. current consumption (at 230 V, 50 Hz, full load)	t _c point max.	Ambient temperature t _a	I-SELECT resistor value
LCAI 65W 150mA-400mA ECO INDUSTRY sl	150 mA	121 V	220 V	33 W	38 W	174 mA	90 °C	-40 ... +75 °C	-
LCAI 65W 150mA-400mA ECO INDUSTRY sl	175 mA	115 V	220 V	39 W	43 W	196 mA	90 °C	-40 ... +75 °C	63.40 kΩ
LCAI 65W 150mA-400mA ECO INDUSTRY sl	200 mA	110 V	220 V	44 W	49 W	219 mA	90 °C	-40 ... +75 °C	54.90 kΩ
LCAI 65W 150mA-400mA ECO INDUSTRY sl	225 mA	105 V	220 V	50 W	55 W	247 mA	90 °C	-40 ... +75 °C	47.50 kΩ
LCAI 65W 150mA-400mA ECO INDUSTRY sl	250 mA	99 V	220 V	55 W	62 W	275 mA	90 °C	-40 ... +70 °C	40.20 kΩ
LCAI 65W 150mA-400mA ECO INDUSTRY sl	275 mA	99 V	220 V	61 W	67 W	295 mA	90 °C	-40 ... +70 °C	34.00 kΩ
LCAI 65W 150mA-400mA ECO INDUSTRY sl	300 mA	98 V	217 V	65 W	71 W	316 mA	90 °C	-40 ... +70 °C	27.40 kΩ
LCAI 65W 150mA-400mA ECO INDUSTRY sl	325 mA	90 V	200 V	65 W	72 W	319 mA	90 °C	-40 ... +70 °C	22.00 kΩ
LCAI 65W 150mA-400mA ECO INDUSTRY sl	350 mA	84 V	186 V	65 W	73 W	323 mA	90 °C	-40 ... +70 °C	12.00 kΩ
LCAI 65W 150mA-400mA ECO INDUSTRY sl	375 mA	78 V	173 V	65 W	73 W	323 mA	90 °C	-40 ... +70 °C	6.19 kΩ
LCAI 65W 150mA-400mA ECO INDUSTRY sl	400 mA	73 V	163 V	65 W	73 W	323 mA	90 °C	-40 ... +70 °C	0.00 kΩ

① Valid at 100 % dimming level.

② Depending on the selected output current.

③ Depending on the DALI traffic at the interface.

④ Valid for immediate change of power supply type otherwise the starting time is valid.

⑤ At power failure.

⑥ Output current is mean value.


⑦ ± 10 %.

⑧ Max. output voltage at full load.

⑨ At full load.

I-SELECT PLUG TOP / ECO


Accessory

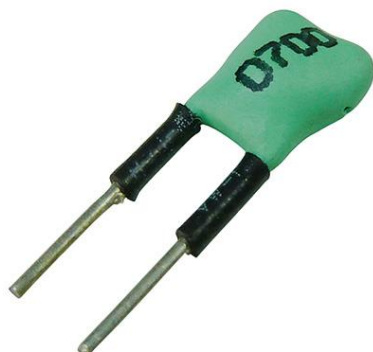

Product description

- _ Ready-for-use resistor to set output current value
- _ Compatible with LED driver series TOP and ECO
- _ Resistor is base insulated
- _ Resistor power 0.25 W
- _ Resistor value tolerance $\pm 1\%$

Website
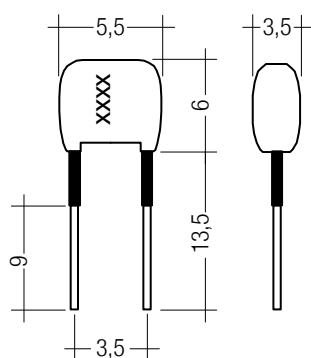
<http://www.tridonic.com/28000446>


Ordering data

Type	Article number	Colour	Marking	Resistor value	Packaging, bag	Weight per pc.
I-SELECT PLUG 175mA BL	28000446	Blue	0175	63.40 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 200mA BL	28000447	Blue	0200	54.90 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 225mA BL	28000448	Blue	0225	47.50 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 300mA BL	28000275	Blue	0300	27.40 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 325mA BL	28000449	Blue	0325	22.00 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 350mA BL	28000276	Blue	0350	12.00 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 375mA BL	28000450	Blue	0375	6.19 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG MAX GR	28000274	Grey	MAX	0.00 k Ω	10 pc(s).	0.001 kg

Standards

EN 55015

EN 60068-2-27 (shock – test case: 1,000 shocks in 6 directions with 30 g / 18 ms)

EN 60068-2-64 (vibration – test case: acc. to table A.1 transport / category 2)

EN 61000-3-2

EN 61000-3-3

EN 61347-1

EN 61347-2-13

EN 62384

EN 61547

EN 62386-101 (according to DALI standard V1)

EN 62386-102

EN 62386-207

According to EN 50172 for use in central battery systems

According to EN 60598-2-22 suitable for emergency lighting installations

Overload protection

If the maximum load is exceeded by a defined internal limit, the LED Driver turns off the LED output. After restart of the LED Driver the output will be activated again.

The restart can either be done via mains reset or via interface (DALI, DSI, switchDIM).

Overtemperature protection

The LED Driver is protected against temporary thermal overheating.

If the temperature limit is exceeded the output current of the LED module(s) is reduced. The temperature protection is activated above $t_{c\max}$.

The activation temperature differs depending on the LED load.

On DC operation this function is deactivated to fulfill emergency requirements.

Short-circuit behaviour

In case of a short circuit at the LED output the LED output is switched off. After restart of the LED Driver the output will be activated again. The restart can either be done via mains reset or via interface (DALI, DSI, switchDIM).

No-load operation

The LED Driver will not be damaged in the no-load operation. The output will be deactivated and therefore free of voltage. If a LED load is connected the device has to be restarted before the output will be activated again.

Hot plug-in

Hot plug-in is not recommend within 5 s after shutdown due to output voltage of $> 0\text{ V}$. If a LED load is connected the device has to be restarted before the output will be activated again.

This can be done with mains reset, DALI, DSI or switchDIM.

Conditions of use and storage

Humidity: 5 % up to max. 85 %,
not condensed
(max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. $+80\text{ °C}$

The devices have to be within the specified temperature range (t_a) before they can be operated.

Expected lifetime

Type	Output current	t_a	40 °C	50 °C	55 °C	60 °C	65 °C	70 °C	75 °C
LCAI 65W 150mA-400mA ECO INDUSTRY sl	< 250 mA	t_c	55 °C	65 °C	70 °C	75 °C	80 °C	85 °C	90 °C
		Lifetime	> 100,000 h	> 100,000 h	> 100,000 h	> 100,000 h	> 100,000 h	77,000 h	55,000 h
	250 – 400 mA	t_c	60 °C	70 °C	75 °C	80 °C	85 °C	90 °C	x
		Lifetime	> 100,000 h	> 100,000 h	> 100,000 h	> 100,000 h	94,000 h	67,000 h	x

The LED Driver is designed for a lifetime stated above under reference conditions and with a failure probability of less than 10 %.

Maximum loading of automatic circuit breakers in relation to inrush current

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current	
Installation Ø	1.5 mm ²	1.5 mm ²	2.5 mm ²	2.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	2.5 mm ²	I_{\max}	time
LCAI 65W 150mA-400mA ECO INDUSTRY sl	14	20	24	32	7	10	12	16	40 A	200 µs

These are max. values calculated out of inrush current! Please consider not to exceed the maximum rated continuous current of the circuit breaker.

Calculation uses typical values from ABB series S200 as a reference.

Actual values may differ due to used circuit breaker types and installation environment.

Harmonic distortion in the mains supply (at 230 V / 50 Hz and full load) in %

	THD	3.	5.	7.	9.	11.
LCAI 65W 150mA-400mA ECO INDUSTRY sl	5.3	5.3	< 1	< 1	< 1	< 1

Control input (DA/N, DA/L)

Digital DALI signal or switchDIM can be wired on the same terminals (DA/N and DA/L).

Digital signal DALI/DSI

The control input is non-polar for digital control signals (DALI, DSI). The control signal is not SELV. Control cable has to be installed in accordance to the requirements of low voltage installations.

Different functions depending on each module.

switchDIM

Integrated switchDIM function allows a direct connection of a push to make switch for dimming and switching.

Brief push (< 0.6 s) switches LED Driver ON and OFF. The LED Drivers switch-ON at light level set at switch-OFF.

When the push to make switch is held, LED modules are dimmed. After repush the LED modules are dimmed in the opposite direction.

In installations with LED Drivers with different dimming levels or opposite dimming directions (e.g. after a system extension), all LED Drivers can be synchronized to 50 % dimming level by a 10 s push.

Use of push to make switch with indicator lamp is not permitted.

corridorFUNCTION

The corridorFUNCTION can be programmed in two different ways.

To program the corridorFUNCTION by means of software a DALI-USB interface is needed in combination with a DALI PS. The software can be the masterCONFIGURATOR.

To activate the corridorFUNCTION without using software a voltage of 230 V simply has to be applied for five minutes at the switchDIM connection.

The unit will then switch automatically to the corridorFUNCTION.

Note:

If the corridorFUNCTION is wrongly activated in a switchDIM system (for example a switch is used instead of pushbutton), there is the option of installing a pushbutton and deactivating the corridorFUNCTION mode by five short pushes of the button within three seconds.

switchDIM and corridorFUNCTION are very simple tools for controlling ballasts with conventional momentary-action switches or motion sensors.

To ensure correct operation a sinusoidal mains voltage with a frequency of 50 Hz or 60 Hz is required at the control input.

Special attention must be paid to achieving clear zero crossings. Serious mains faults may impair the operation of switchDIM and corridorFUNCTION.

Dimming

Dimming range 1 % to 100 %

Digital control with:

- DSI signal: 8 bit Manchester Code
Speed 1 % to 100 % in 1.4 s
- DALI signal: 16 bit Manchester Code
Speed 1 % to 100 % in 0.2 s
Programmable parameter:
Minimum dimming level
Maximum dimming level
Default minimum = 1 %
Programmable range $1\% \leq \text{MIN} \leq 100\%$
Default maximum = 100 %
Programmable range $100\% \geq \text{MAX} \geq 1\%$

Dimming curve is adapted to the eye sensitiveness.


Dimming is realized by a combination of analog amplitude dimming and PWM dimming.

35 ... 100 %: amplitude dimming

1 ... 34 %: PWM dimming

Dimming characteristics

Digital dimming value

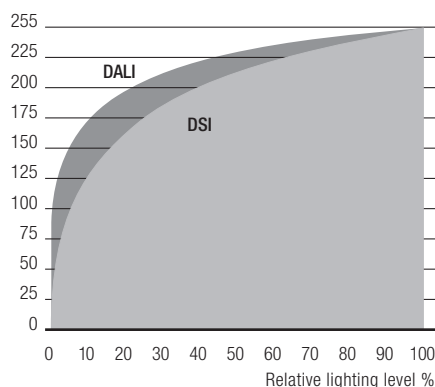

Dimming characteristics as seen by the human eye

DC emergency operation

The LED Driver is designed for operation on DC voltage and pulsed DC voltage.

Light output level programmable from 1 – 100 %

Programming by extended DSI or DALI signal (16 bit).

Default value is 15 %

In DC operation dimming mode can be activated.

The voltage-dependent input current of Driver incl. LED module is depending on the used load.

The voltage-dependent no-load current of Driver (without or defect LED module) is for:

AC: 46 mA

DC: 5 mA

Function: adjustable current (I-SELECT)

The output current of the LED Driver can be selected between 150 and 400 mA. For adjustment there are two options available.

Option 1: „I-SELECT resistor“

In 25 mA steps adjustable (see page 2, specific technical data, „I-SELECT resistor value“).

Relationship between output current and resistor value can be found at the table “Specific technical data”. Resistor values specified from standardised resistor value ranges. Resistor value tolerance has to be $\leq 1\%$. Resistor power has to be $\geq 0.1\text{ W}$.

If the resistor is connected with wires a max. wire length of 2 m may not be exceeded and possible interferences have to be avoided.

Resistors for the main output current values can be ordered from Tridonic (see accessories).

Option 2: DALI

Adjustment is done by masterCONFIGURATOR (see masterCONFIGURATOR documentation).

Constant light output (CLO)

The luminous flux of an LED decreases constantly over the lifetime. The CLO function ensures that the emitted luminous flux remains stable. For that purpose the LED current will increase continuously over the LED lifetime.

In masterCONFIGURATOR it is possible to select a start value (in percent) and an expected lifetime. The LED Driver adjusts the current afterwards automatically.

Intelligent temperature monitoring (ITM)

The device offers the possibility to connect a silicon based temperature sensor (KTY81-210, KTY82-210) to monitor the LED temperature and protect the

module against thermal damages.

If the temperature limit is exceeded the LED output will be dimmed or turned off. If the temperature falls below threshold the device will automatically return to the nominal operation.

The use of a NTC or PTC resistor is not possible.

The device can be operated without a sensor (default setting).

The function can be adjusted via masterCONFIGURATOR.

Intelligent Voltage Guard

Intelligent Voltage Guard is the name of the electronic monitoring of the mains voltage. It immediately shows if the mains voltage rises above certain thresholds. Measures can then be taken quickly to prevent damage to the LED Driver.

- If the mains voltage rises above approx. 280 Vrms (voltage depends on the LED Driver type), the LED light starts flashing on and off.
- To avoid a damage of the LED Driver the mains supply has to be switched off at this signal.

Power-up fading

The power-up fading function offers the opportunity to realise a soft start. The soft start will be applied at turning on the mains and at starts by switch-DIM.

The function is programmed as a DALI fade time in the range from 0.7 to 16 seconds and dims in the selected time from 0 % to the power-on level.

By factory default power-up fading is not active (0 seconds).

Programming

With appropriate software and a USB interface different functions can be activated and various parameters can be configured in the LED Driver. All that is needed is a DALI-USB and the software (masterCONFIGURATOR).

masterCONFIGURATOR

From version 2.8:

For programming functions (CLO, I-SELECT, power-up fading, corridorFUNCTION) and device settings (fade time, ePowerOnLevel, DC level, etc.). For further information see masterCONFIGURATOR manual.

Electrical connections**Wiring**


LED module/LED Driver/supply

IDC interface

- solid wire with a cross section of 0.5 mm^2

Horizontal interface

- solid wire with a cross section of $0.5\text{--}0.75\text{ mm}^2$ with an insulation diameter up to 2.5 mm
- strip 8–9 mm of insulation from the cables to ensure perfect operation of the push terminals
- Loosen wire through twisting and pulling

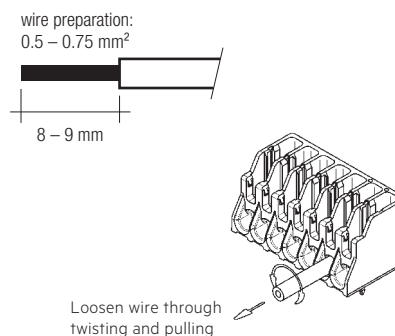**Wiring guidelines**

- Run the secondary lines separately from the mains connections and lines to achieve good EMC performance.
- The max. secondary cable length is 2 m (4 m circuit), this applies for LED output as well as for I-SELECT 2.
- For good EMC performance, keep the LED wiring as short as possible.
- Secondary switching is not permitted.
- The LED Driver has no inverse-polarity protection on the secondary side. Wrong polarity can damage LED modules with no inverse-polarity protection.
- Wrong wiring of the LED Driver can lead to irreparable damage and no proper function is given anymore.
- With mains transients of 4 kV can voltage peaks up to 4 kV occur against PE at the output of the LED Driver. This has to be considered concerning the dielectric strength of the LED module (insulation against PE).
- To avoid the damage of the Driver, the wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.).

Earth connection



The earth connection is conducted as protection earth (PE). The LED Driver can be earthed via earth terminal or metal housing. If the LED Driver will be earthed, protection earth (PE) has to be used. There is no earth connection required for the functionality of the LED Driver.

Earth connection is recommended to improve following behaviour.

- Electromagnetic interferences (EMI)
- LED glowing at standby
- Transmission of mains transients to the LED output

In general it is recommended to earth the LED Driver if the LED module is mounted on earthed luminaire parts respectively heat sinks and thereby representing a high capacity against earth.

Circuit diagram

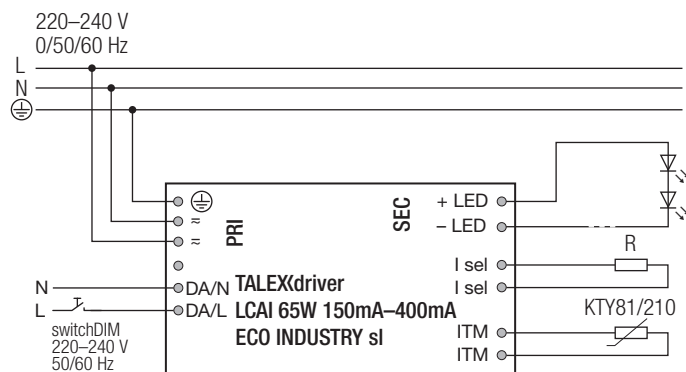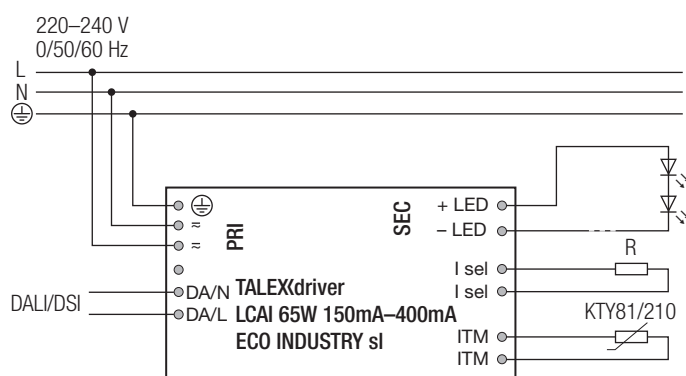

Insulation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an insulation test with 500 V_{DC} for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal.

The insulation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V_{AC} (or 1.414 x 1500 V_{DC}). To avoid damage to the electronic devices this test must not be conducted.

Conditions of use

The LED Driver is declared as inbuilt LED controlgear, meaning it is intended to be used within a luminaire enclosure.

If the product is used outside a luminaire, the installation must provide suitable protection for people and environment (e.g. in illuminated ceilings).

Maximum number of switching cycles

All LED Driver are tested with 50,000 switching cycles.

The actually achieved number of switching cycles is significantly higher.

Disposal of equipment



Return old devices in accordance with the WEEE directive to suitable recycling facilities.


Additional information

Additional technical information at www.tridonic.com → Technical Data


Lifetime declarations are informative and represent no warranty claim. No warranty if device was opened.

Diagrams LCAI 65W 150mA-400mA ECO INDUSTRY sl


Efficiency vs load

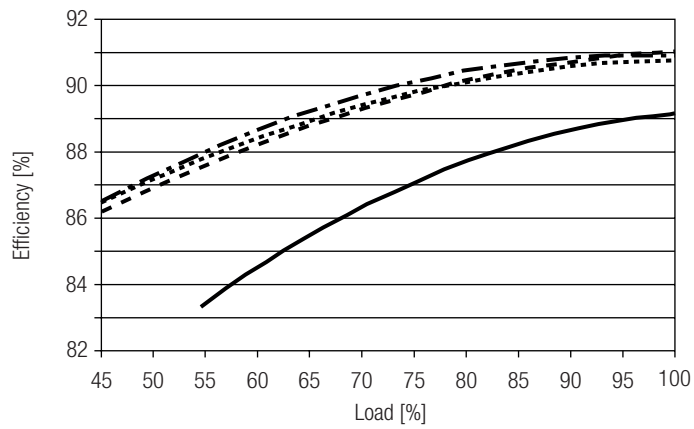


Power factor vs load

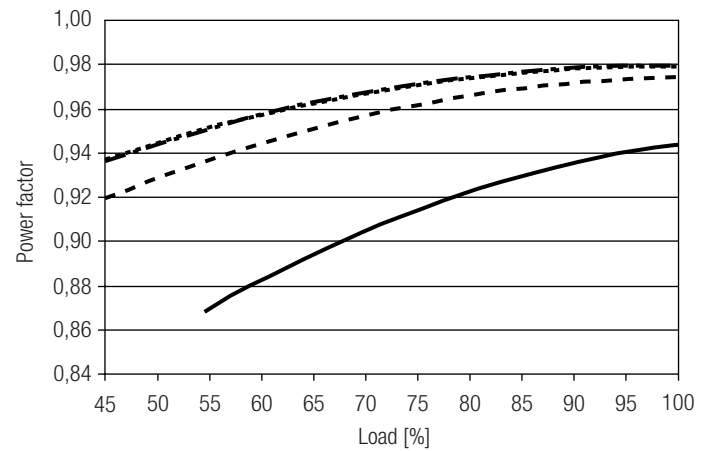


Input power vs load

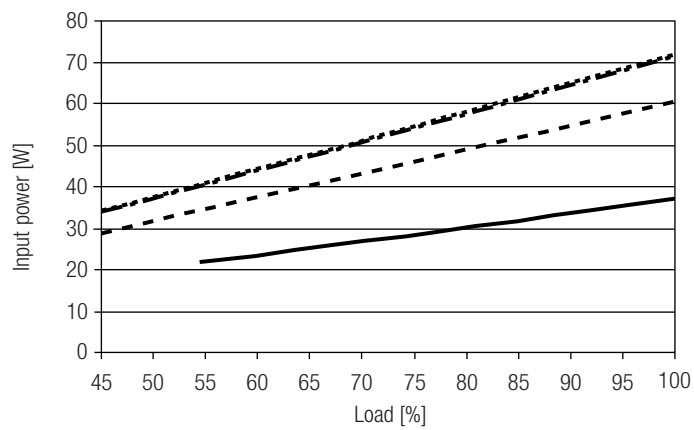

Input current vs load

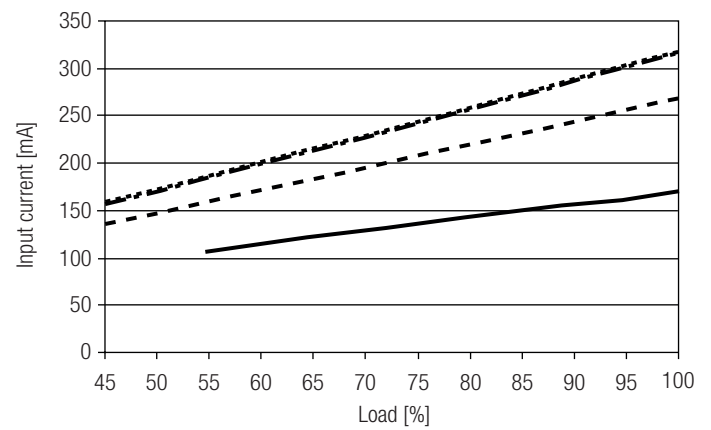

THD vs load

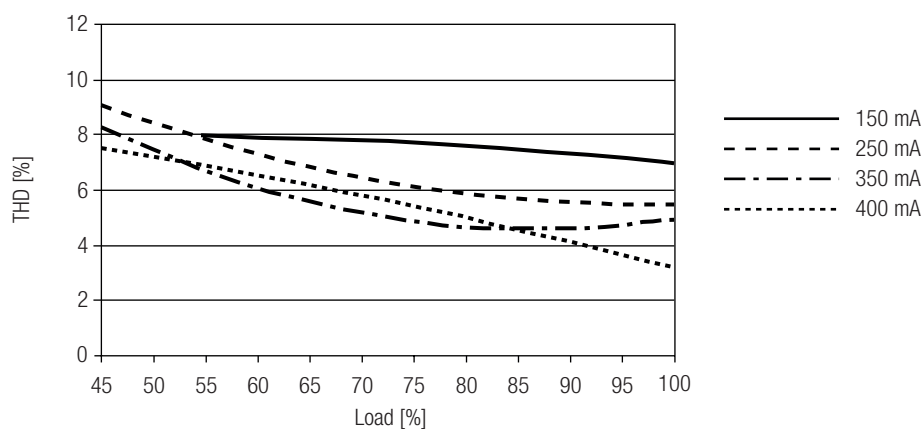

100 % load correspond to the max. output power (full load) according to the table on page 2.