

EM ready2apply BASIC 2 W SM

EM ready2apply



Product description

- _ LED emergency module suitable for surface mounted installation
- _ Complete set with integrated electronics, LED module, heat sink, optics and battery
- _ Includes click-in multi-lens option for anti-panic, escape route and spot illumination
- _ Emergency lighting function for manual testing
- _ BESA compatible mounting
- _ EM = Emergency

Properties

- _ Output power 1.5 W
- _ Very low stand-by power loss
- _ Non-maintained variants
- _ 1 or 3 h rated duration (separate variants)
- _ Simple connection of Lithium Iron Phosphate battery with plug-in system
- _ White or black housing colour options
- _ Back box in two different heights available (for rear and side entry)
- _ 5 years guarantee electronic (LED driver) (conditions at <https://www.tridonic.com/en/int/services/manufacture-guarantee-conditions>)
- _ 5 years guarantee for LiFePO4 batteries (conditions at <https://www.tridonic.com/en/int/services/manufacture-guarantee-conditions>)


Website

<http://www.tridonic.com/89800761>



EM ready2apply BASIC 2 W SM

EM ready2apply

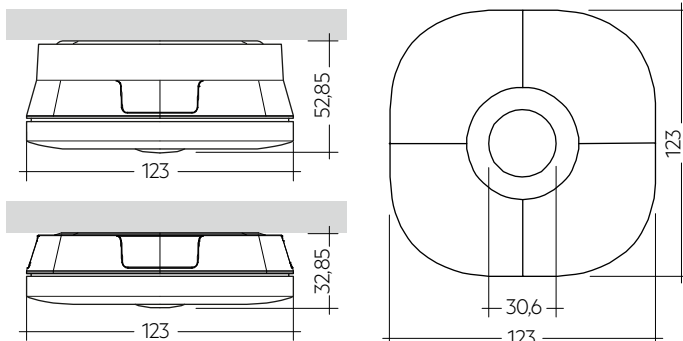**Ordering data**

Type	Article number	Colour	Design	Rated duration	Number of cells	Packaging, carton	Packaging, pallet	Weight per pc.
EM R2A BASIC NM 112 SM	89800761	White	low	1 h	2	1 pc(s).	400 pc(s).	0.274 kg
EM R2A BASIC NM 132 SM	89800762	White	low	3 h	2	1 pc(s).	400 pc(s).	0.270 kg
EM R2A BASIC NM 112 SMh	89800763	White	high	1 h	2	1 pc(s).	400 pc(s).	0.300 kg
EM R2A BASIC NM 132 SMh	89800764	White	high	3 h	2	1 pc(s).	400 pc(s).	0.300 kg
EM R2A BASIC NM 112 SM-B	89800816	Black	low	1 h	2	1 pc(s).	400 pc(s).	0.348 kg
EM R2A BASIC NM 132 SM-B	89800817	Black	low	3 h	2	1 pc(s).	400 pc(s).	0.270 kg
EM R2A BASIC NM 112 SMh-B	89800818	Black	high	1 h	2	1 pc(s).	400 pc(s).	0.300 kg
EM R2A BASIC NM 132 SMh-B	89800819	Black	high	3 h	2	1 pc(s).	400 pc(s).	0.300 kg

Technical data

Rated supply voltage	220 – 240 V
Input voltage range AC (tolerance for safety)	198 – 264 V
Input voltage range AC (tolerance for performance)	198 – 254 V
Mains frequency	50 / 60 Hz
Overvoltage protection	320 V (for 48 h)
Starting time (Emergency operation)	< 0.5 s from detection of emergency event
Output current tolerance	± 5 %
LF current ripple	± 5 %
Ambient temperature t_a	5 ... 40 °C
Mains voltage changeover threshold	According to EN 60598-2-22
Type of protection	IP20
Impact protection degree ^①	IK07
Protection class	II
Colour temperature	6,500 K
Colour tolerance	3 SDCM
Colour rendering index CRI	> 80
Lifetime	up to 50,000 h

Approval marks**Standards**

according to EN 50172, EN 55015, EN 60068-2-6, EN 60068-2-30, EN 60598-1, EN 60598-2-2, EN 60598-2-22, EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 61547, acc. to EN 62034, EN 62384, EN 62386-101, EN 62386-102, DALI standard EN 62386-202, IEC 62133 (related to Lithium Iron battery), UN 38.3 (related to Lithium Iron battery), EN 62031, EN 62471

Specific technical data

Type	Number of battery cells	Rated duration	Mains current (230 V, 50 Hz), non-maintained		Mains power (230 V, 50 Hz), non-maintained		Typ. λ (at 230 V, 50 Hz, charging)	Typ. output current	Typ. forward voltage	Output power
			Charging	Charger off	Charging	Charger off				
Normal operation										
EM R2A BASIC NM 112 SM	2	1 h	20 mA	10 mA	2.5 W	0.6 W	0.63C	–	–	–
EM R2A BASIC NM 132 SM	2	3 h	20 mA	10 mA	2.5 W	0.6 W	0.63C	–	–	–
EM R2A BASIC NM 112 SMh	2	1 h	20 mA	10 mA	2.5 W	0.6 W	0.63C	–	–	–
EM R2A BASIC NM 132 SMh	2	3 h	20 mA	10 mA	2.5 W	0.6 W	0.63C	–	–	–
EM R2A BASIC NM 112 SM-B	2	1 h	20 mA	10 mA	2.5 W	0.6 W	0.63C	–	–	–
EM R2A BASIC NM 132 SM-B	2	3 h	20 mA	10 mA	2.5 W	0.6 W	0.63C	–	–	–
EM R2A BASIC NM 112 SMh-B	2	1 h	20 mA	10 mA	2.5 W	0.6 W	0.63C	–	–	–
EM R2A BASIC NM 132 SMh-B	2	3 h	20 mA	10 mA	2.5 W	0.6 W	0.63C	–	–	–
Emergency operation										
EM R2A BASIC NM 112 SM	2	1 h	–	–	–	–	–	126 mA	12 V	1.5 W
EM R2A BASIC NM 132 SM	2	3 h	–	–	–	–	–	126 mA	12 V	1.5 W
EM R2A BASIC NM 112 SMh	2	1 h	–	–	–	–	–	126 mA	12 V	1.5 W
EM R2A BASIC NM 132 SMh	2	3 h	–	–	–	–	–	126 mA	12 V	1.5 W
EM R2A BASIC NM 112 SM-B	2	1 h	–	–	–	–	–	126 mA	12 V	1.5 W
EM R2A BASIC NM 132 SM-B	2	3 h	–	–	–	–	–	126 mA	12 V	1.5 W
EM R2A BASIC NM 112 SMh-B	2	1 h	–	–	–	–	–	126 mA	12 V	1.5 W
EM R2A BASIC NM 132 SMh-B	2	3 h	–	–	–	–	–	126 mA	12 V	1.5 W

① IK07 in case of fixing the front plate to the back box with a M3x10 self-tapping screw (not supplied). With clip fixing only IK03.

LiFePO4 Battery pack 3.0 Ah

Accessory



Product description

- _ High temperature LiFePO4 cells for use with EM ready2apply surface mounted emergency lighting units
- _ 6 year design life (up to 30 °C ambient temperature)
- _ 4 year design life (up to 40 °C ambient temperature)
- _ 5 years guarantee (conditions at <https://www.tridonic.com/en/int/services/manufacture-guarantee-conditions>)

Properties

- _ Certified quality manufacturer
- _ Charge efficiency > 90 %
- _ Low self discharge
- _ Simple connection with plug-in system
- _ Protection and monitoring circuit built into battery enclosure
- _ Deep discharge protection
- _ Suitable for emergency lighting equipment as per IEC 60598-2-22




Website

<http://www.tridonic.com/28003554>



LiFeGuard

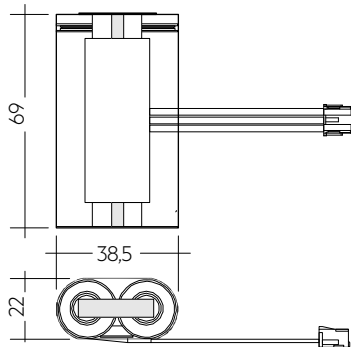

Ordering data

Type	Article number	Capacity	Packaging, carton	Weight per pc.
PACK-LiFePO4 3.0Ah 2A CON R2A SM	28003554	3 Ah	75 pc(s).	0.104 kg

1. Standards

according to EN 50172

EN 55015

EN 60068-2-6

according to EN 60068-2-30

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 61000-3-2

EN 61000-3-3

EN 61347-1

EN 61347-2-7

EN 61347-2-7/A1

EN 61347-2-13

EN 61347-2-13/A1

EN 61547

according to EN 62034

EN 62384

EN 62386-101

EN 62386-102

EN 62386-202

IEC 62133 (related to Lithium Iron battery)

UN 38.3 (related to Lithium Iron battery)

EN 62031

EN 62471

1.1 Glow-wire test

according to EN 60598-1 with increased temperature of 850 °C passed.

2. Thermal data

2.1 Temperature range

According to the standard IEC 60598-1 a LED Driver for remote installation has a max. case temperature of 90 °C. The ambient temperature range t_a for the EM R2A BASIC is defined to meet this requirement.

2.2 Expected lifetime

Average lifetime 50,000 hours under rated conditions with a failure rate of less than 10 %. Average failure rate of 0.2 % per 1000 operating hours.

Expected lifetime

Type	t_a	25 °C	35 °C	40 °C
EM R2A BASIC	lifetime	> 100,000 h	> 50,000 h	50,000 h

2.3 Storage conditions

- Humidity 5 % up to max. 85 %, not condensed (max. 56 days/year at 85 %)


Note: The devices have to be within the specified temperature range (t_a) before they are operated.

- Store batteries within the specified temperature range in low humidity conditions. Optimal storage conditions are:
 - Temperature: -20...+35 °C for up to 15 months
 - Relative humidity: 65 % $\pm$ 5 %
- Avoid atmosphere with corrosive gas
- Disconnect batteries before store or delivery
- Avoid storage of discharged batteries

3. Installation / Wiring

3.1 Lens assembly

- Wear gloves when mounting the lens
- Take care of the mounting direction of the escape route lens
- Use screwdriver for replacing/removing lens
 - + 2. Push lens clips with screwdriver via openings on both sides
 3. Remove lens

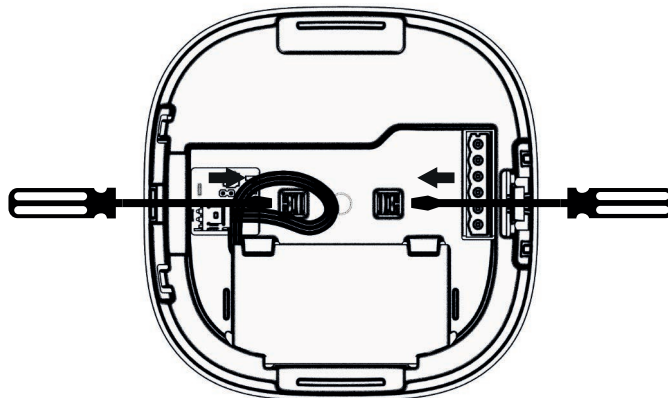

3.2 Luminaire assembly


- Back box preparation:
 - For rear entry: 2 drill locations are provided for a 20 mm hole
 - For side entry (use of deep back box): 3 locations are provided for use with 20 mm cable glands.
- If required use a M3x10 self tapping screw (not supplied) to secure the front plate to the back box. Drill a 3 mm hole in the back box indent.
- Fix the back box to the ceiling (BESA compatible mounting). Note: direction arrows allowing correct orientation for corridor lens.
- Change lenses if required (pre-fitted with anti panic lens).
- Wiring of the mains terminal block will require a suitable tool to open the cage clamp (size 3.5 x 0.5 mm blade).
- Plug battery into connector.
- Fix front plate to back box: locating battery side tabs first, push home, a click will be heard when front plate is inserted correctly.
- Apply power and the green charge indicator LED will be illuminated.
- The deep back box has a parking facility for up to 6 Wago 2773 series connectors (not supplied) to aid through wiring cable management.



Take care when drilling to prevent damage to internal components.

If an impact protecting rating of above IK03 to a max. of IK07 is required, use an M3x10 self-tapping screw for the assembly.

3.3 Wiring diagrams

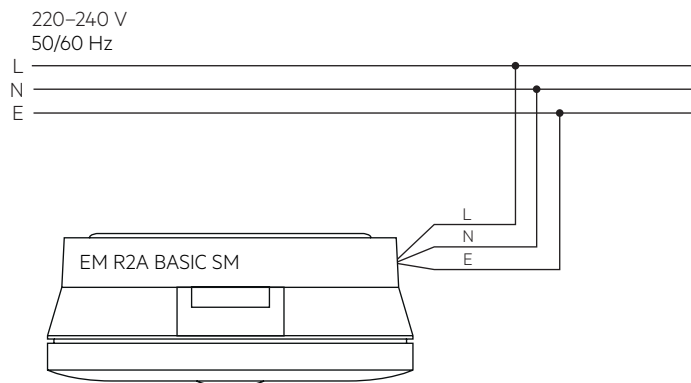



Note: Battery must be connected before mains connection.

3.4 Wiring type and cross-section

Wiring

Mains (N, L): blue, brown
Earth terminal (E)

Cable: low smoke, halogen free



The installation of the luminaire has to be done by a qualified person.

3.5 Earth terminal (E)

The earth terminal is a loose connection without function. Use it to connect the earth wire to prevent it being loose in the luminaire. There is no earth connection required for the functionality of the EM ready2apply.

4. Mechanical data

4.1 Housing properties

- Polycarbonate white RAL 9016
- Polycarbonate black RAL 9005

4.2 Battery connection

Battery pack connection
3-pole plug connection

4.3 Fixing

Surface Mount with options for cable entry by BESA, rear and side entry. To minimise dust ingress used cable entry holes will be drill out.
Screw holes for BESA and general mounting are oval shape to allow adjustment and are pre-drilled to simplify the final installation.

5. Electrical data

5.1 Maximum loading of automatic circuit breakers

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current	
Installation Ø	1.5 mm ²	1.5 mm ²	2.5 mm ²	4 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	4 mm ²	I _{max}	time
EM R2A BASIC	180	260	260	260	90	130	130	130	10 A	120 µs

5.3 Insulation matrix

	Mains	Battery
Mains	–	• •
Battery	• •	–

- • Represents double or reinforced insulation

5.4 Battery charge regime / discharge

EM R2A BASIC 2 W SM, 1 / 3 h

	Type	EM R2A BASIC 2 W SM
	Article no.	89800761-64 / 89800816-19
	Cells	2 cells
	Duration	1 / 3 h
Battery charge time	Initial	20 h
	Recharge	12 h
	Trickle charge	continuously and battery voltage controlled
Typ. charge current ^①	Initial charge	290 mA
	Recharge	290 mA
	Trickle charge	290 mA / 0 mA
Discharge current at 3.2 V (nominal)		625 mA

^① Automatic recharge when battery voltage falls below 3.4 V. Charger off (0 mA) when battery voltage exceeds 3.6 V.

Note: Battery protected against operation at excessive temperatures (charging stopped when battery cell temperature < 0 °C or > 60 °C)

5.5 Battery selection for replacement

EM R2A BASIC 2 W SM, 1 / 3 h

				Type	EM R2A BASIC 2 W SM
				Article no.	89800761-64 / 89800816-19
				Cells	2 cells
				Duration	1 / 3 h
Technology and capacity	Design	Number of cells	Type	Article no.	Assignable batteries
Lithium Iron Phosphate 3 Ah	side by side	1 + 1	EM R2A SM ACCU-LiFePO4 3.0Ah 2A CON	28003554	•


Note: If the rated duration of operation cannot be reached the battery must be replaced. Remove mains during battery replacement.

6. Functions

6.1 Status indication

The indication LED is integrated in the bezel. A green LED indicates that charging current is flowing into the battery.

The battery is protected against operation at excessive temperatures (charging stops and indication LED turns off when battery cell temperature < 0 °C or > 60 °C).



6.2 Testing

Emergency operation can be manually tested by removal of the mains supply.

6.3 Technical data batteries

Accu Lithium Iron Phosphate

International designation	IFpR 19/66
Battery voltage/cell	3.2 V
Single cell dimensions	
Diameter	18 mm
Height	65 mm
Capacity two cell pack	3.0 Ah
Max. short term temperature (reduced lifetime)	70 °C
Max. number discharge cycles	50 cycles total
Packing quantity	1 pc. per carton

Comply with UN 38.3 and IEC 62133 (safety testing) protected against over charge, over discharge, charging at excessive temperatures, short-circuit and over current.

For battery data see separate data sheet.

7. Optical properties

7.1 Anti panic

Max. spacing for >0.5 lux[®]

Height	Centre to end [®]		Centre to centre [®]	
	Trans	Axial	Trans	Axial
2.5 m	3.85 m	3.80 m	10.90 m	10.85 m
3.0 m	3.80 m	3.75 m	11.90 m	11.90 m
3.5 m	3.80 m	3.80 m	12.90 m	12.90 m
4.0 m	3.70 m	3.70 m	13.90 m	13.85 m
5.0 m	3.55 m	3.50 m	14.90 m	14.90 m
6.0 m	3.10 m	3.05 m	15.10 m	15.05 m

All values for $t_a = 30\text{ °C}$


Luminous flux: 200 lm

[®] Maintinance factor = 0.8, photometric data available on request

[®] Distance between module and wall

[®] Distance between two modules

Light distribution

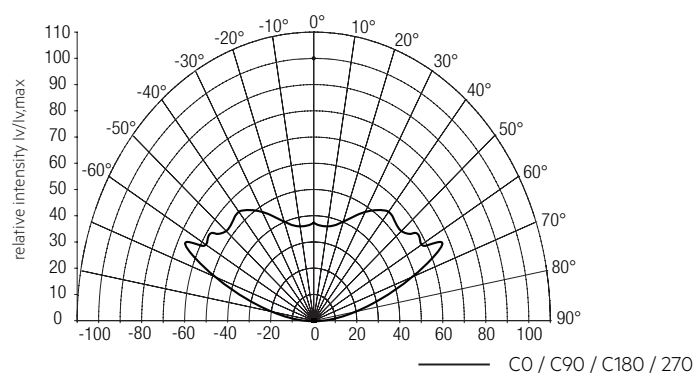

7.2 Escape route

Max. spacing for >1.0 lux[®]

Height	Centre to end [®]		Centre to centre [®]	
	Trans	Axial	Trans	Axial
2.5 m	4.75 m	2.75 m	11.65 m	6.55 m
3.0 m	4.80 m	2.95 m	12.75 m	7.20 m
3.5 m	5.05 m	1.50 m	13.45 m	6.85 m
4.0 m	5.20 m	1.65 m	13.60 m	6.50 m
5.0 m	5.50 m	1.80 m	14.30 m	4.35 m
6.0 m	5.70 m	1.90 m	15.05 m	4.85 m
7.0 m	5.75 m	1.90 m	15.60 m	5.15 m
8.0 m	5.65 m	1.85 m	16.05 m	5.35 m

All values for $t_a = 30\text{ °C}$


Luminous flux: 200 lm

[®] Maintinance factor = 0.8, photometric data available on request

[®] Distance between module and wall

[®] Distance between two modules

Light distribution

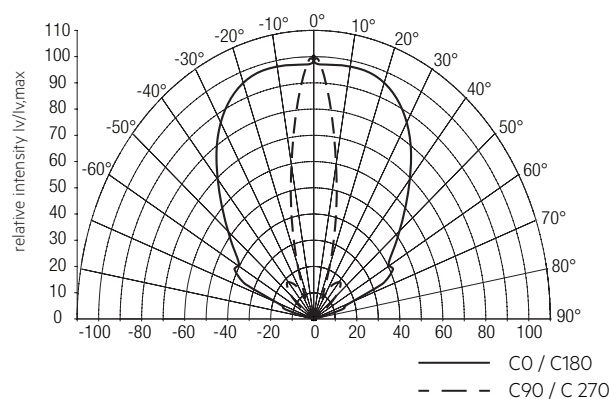

7.3 Spot

Max. spacing for >0.5 lux / > 5 lux^①

Minimum illuminance	Height	Centre to end ^②		Centre to centre ^③	
		Trans	Axial	Trans	Axial
0.5	2.5 m	1.05 m	1.90 m	8.40 m	4.30 m
	3.0 m	2.35 m	1.25 m	5.35 m	5.20 m
	3.5 m	2.80 m	1.45 m	6.25 m	6.05 m
	4.0 m	1.70 m	1.70 m	7.90 m	5.85 m
	5.0 m	2.10 m	2.05 m	8.90 m	8.40 m
	6.0 m	2.30 m	2.30 m	8.15 m	8.10 m
	7.0 m	2.50 m	2.45 m	8.00 m	8.00 m
	8.0 m	2.65 m	2.60 m	7.80 m	7.85 m
5.0	2.5 m	0.85 m	0.80 m	2.50 m	2.45 m
	3.0 m	0.90 m	0.85 m	2.55 m	2.55 m
	3.5 m	0.90 m	0.90 m	2.75 m	2.75 m
	4.0 m	0.90 m	0.95 m	2.95 m	2.95 m
	5.0 m	0.95 m	0.90 m	3.30 m	3.25 m
	6.0 m	0.95 m	0.90 m	3.50 m	3.45 m
	7.0 m	0.85 m	0.85 m	3.60 m	3.55 m
	8.0 m	0.75 m	0.75 m	3.60 m	3.60 m

All values for $t_a = 30^\circ\text{C}$


Luminous flux: 200 lm

^① Maintenance factor = 0.8, photometric data available on request

^② Distance between module and wall

^③ Distance between two modules

Light distribution

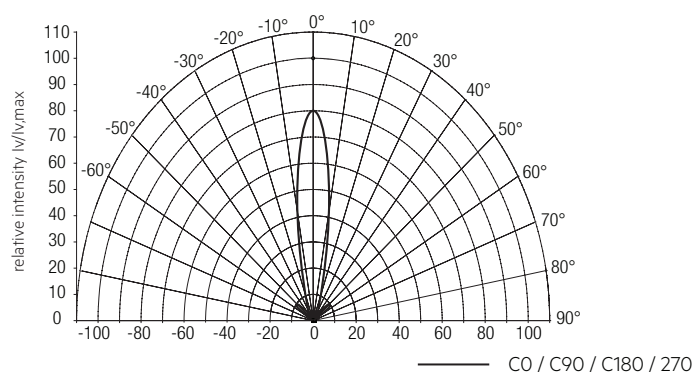

8. Miscellaneous

8.1 Battery replacement

After a battery replacement and a subsequent full charge cycle (24 h) a duration test is mandatory to prove that with the new battery the rated duration is achieved.



Do not damage battery and other components during battery replacement.

8.2 Black Box data recording

Recording of several parameters only accessible for Tridonic.

8.3 Additional information

Additional technical information at www.tridonic.com → Technical Data

The light source of this luminaire is not replaceable; when the light source reaches its end of life replace the whole luminaire. Lifetime declarations are informative and represent no warranty claim. No warranty if device was opened.