

Driver LC 42W 700/900/1050mA flexC SR ADV

advanced series

**Product description**

- _ Independent fixed output LED driver
- _ For luminaires of protection class I and protection class II
- _ For luminaires with M and MM as per EN 60598, VDE 0710 and VDE 0711
- _ Temperature protection as per EN 61347-2-13 C5e
- _ Adjustable output current between 700, 900 and 1,050 mA
- _ Max. output power 42 W
- _ Up to 88 % efficiency
- _ Nominal lifetime up to 50,000 h
- _ 5 years guarantee (conditions at <https://www.tridonic.com/manufacture-guarantee-conditions>)

Housing properties

- _ Casing: polycarbonate, white
- _ Type of protection IP20

Interfaces

- _ Input terminals: 0° screw terminals
- _ Output terminals: 45° push terminals

Functions

- _ Overload protection
- _ Short-circuit protection
- _ No-load protection
- _ Overtemperature protection
- _ Burst protection voltage 1 kV
- _ Burst protection voltage 1 kV (L to N)
- _ Surge protection voltage 2 kV (L/N to earth)

Typical applications

- _ For spot light and downlight in retail and hospitality applications
- _ For panel light and area light in office and education application

Website
<http://www.tridonic.com/28002497>


Spotlights



Downlights



Linear



Area



Floor | Wall



Free-standing



Street




Decorative



High bay

Driver LC 42W 700/900/1050mA flexC SR ADV

advanced series

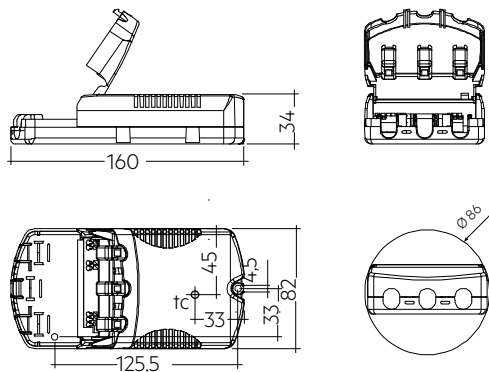**Ordering data**

| Type | Article number | Packaging, carton | Packaging, pallet | Weight per pc. |
|------------------------------------|----------------|-------------------|-------------------|----------------|
| LC 42W 700/900/1050mA flexC SR ADV | 28002497 | 20 pc(s). | 1,120 pc(s). | 0.18 kg |

Technical data

| | |
|---|------------------------------|
| Rated supply voltage | 220 – 240 V |
| AC voltage range | 198 – 264 V |
| Max. input current (at 230 V, 50 Hz, full load) | 0.23 A |
| Mains frequency | 50 / 60 Hz |
| Overvoltage protection | 320 V AC, 1 h |
| Max. input power ^① | 49 W |
| Typ. power consumption (at 230 V, 50 Hz, full load) ^① | 48 W |
| Min. output power | 21 W |
| Max. output power | 42 W |
| Typ. efficiency (at 230 V, 50 Hz, full load) ^① | 88 % |
| λ (at 230 V, 50 Hz, full load) ^① | 0.95 |
| Output current tolerance ^{②③} | $\pm 10 \%$ |
| Max. output current peak ^④ | \leq output current + 20 % |
| Max. output voltage (U-OUT) | 60 V |
| THD (at 230 V, 50 Hz, full load) | $< 10 \%$ |
| Output LF current ripple (< 120 Hz) | $\pm 5 \%$ |
| Output P _{ST_LM} (at full load) | ≤ 1 |
| Output SVM (at full load) | ≤ 0.4 |
| Starting time (at 230 V, 50 Hz, full load) | ≤ 0.5 s |
| Turn off time (at 230 V, 50 Hz, full load) | ≤ 0.5 s |
| Hold on time at power failure (output) | 0 s |
| Ambient temperature t_a (at lifetime 50,000 h) | 40 °C |
| Storage temperature t_s | -40 ... +80 °C |
| Lifetime | up to 50,000 h |
| Guarantee (conditions at www.tridonic.com) | 5 Year(s) |
| Dimensions L x W x H | 159.4 x 82 x 34 mm |

Approval marks

IP20 SELV           RoHS

Standards

EN 55015, EN 60598-1, EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-13, EN 61547, EN 62384

Specific technical data

| Type | Output ^② current | Min. output voltage | Max. output voltage | Max. output power | Typ. power consumption (at 230 V, 50 Hz, full) | Typ. current consumption (at 230 V, 50 Hz, full) | Efficiency (at 230 V, 50 Hz, full load) | Efficiency (at 230 V, 50 Hz, min. load) | t _c point max. | Ambient temperature t _a | I _{out} select | Resistor ^⑤ |
|---|--------------------------------|------------------------|------------------------|----------------------|---|---|--|--|------------------------------|--|-------------------------|-----------------------|
| LC 42W 700/900/1050mA flexC SR ADV | 700 mA | 30 V | 52.0 V | 36.4 W | 42 W | 190 mA | 88 % | 86.0 % | 75 °C | -20 ... +50 °C | - | - |
| LC 42W 700/900/1050mA flexC SR ADV | 900 mA | 23 V | 46.5 V | 42.0 W | 48 W | 220 mA | 88 % | 84.5 % | 75 °C | -20 ... +50 °C | 0-1 | ADV Type A |
| LC 42W 700/900/1050mA flexC SR ADV | 1,050 mA | 20 V | 40.0 V | 42.0 W | 48 W | 220 mA | 88 % | 84.0 % | 75 °C | -20 ... +50 °C | 0-2 | ADV Type A |

① Test result at 1,050 mA.

② Output current is mean value.


③ Test result at default output current.

④ Test result at 25 °C.

⑤ Type A is a short circuit plug (0 Ω).

ADV Plug for output current select

Accessory

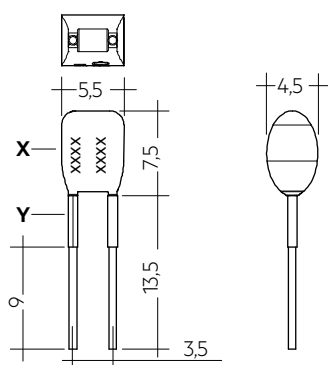

Product description

- _ Ready-for-use resistor to set output current value
- _ Compatible with LED driver serie LC flexC ADV; not compatible with I-SELECT (generation 1) and I-SELECT 2 (generation 2)
- _ Resistor is base insulated
- _ When using your own resistors, make sure the resistor must be isolated
- _ Resistor power 0.25 W
- _ Current tolerance $\pm 2\%$ additional to output current tolerance
- _ Hot plug of the resistor is not permitted
- _ For detailed current setting see table "Specific technical data" of the respective LED driver and chapter 3.7 or 3.8 Current setting in data sheet

Website

<http://www.tridonic.com/28001771>


Ordering data

| Type | Article number | Colour of X area | Colour of Y area | Marking | Resistor value | Packaging, bag | Weight per pc. |
|--------------------|----------------|------------------|------------------|---------|-----------------|----------------|----------------|
| ADV Plug Type A YL | 28001771 | Yellow | Yellow | A | 0.00 k Ω | 10 pc(s). | 0.001 kg |

1. Standards

EN 55015
EN 60598-1
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62384

1.1 Glow wire test

according to EN 61347-1 with increased temperature of 850 °C passed.

2. Thermal details and lifetime

2.1 Expected lifetime


| Expected lifetime | | | | |
|------------------------------------|----------|----------|----------|----------|
| Type | Current | ta | 40 °C | 50 °C |
| LC 42W 700/900/1050mA flexC SR ADV | 700 mA | tc | 65 °C | 75 °C |
| | | Lifetime | 50,000 h | 30,000 h |
| | 900 mA | tc | 65 °C | 75 °C |
| | | Lifetime | 50,000 h | 30,000 h |
| | 1,050 mA | tc | 65 °C | 75 °C |
| | | Lifetime | 50,000 h | 30,000 h |

The LED driver is designed for a lifetime stated above under reference conditions and with a failure probability of less than 10 %.

The relation of tc to ta temperature depends also on the luminaire design. If the measured tc temperature is approx. 5 K below tc max., ta temperature should be checked and eventually critical components (e.g. ELCAP) measured. Detailed information on request.

3. Installation / wiring

3.1 Circuit diagram

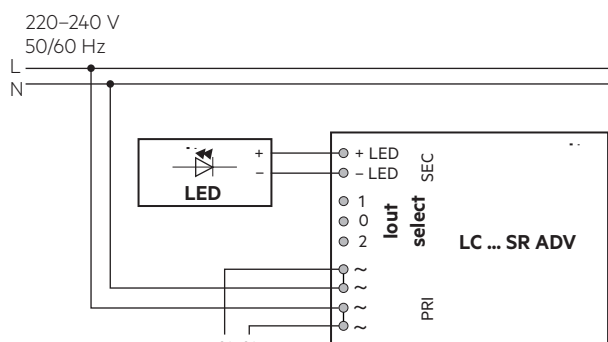


Device with loop through wiring function.

3.2 Wiring type and cross section


Mains supply wires

For wiring use stranded wire with ferrules or solid wire.
For perfect function of the cage clamp terminals the strip length should be 4 – 5 mm for the input terminal.
The max. torque at the clamping screw (M3) is 0.2 Nm.




Secondary wires (LED module)

For wiring use solid wire from 0.5 – 1.5 mm².
Strip 8.5 – 9.5 mm of insulation from the cables to ensure perfect operation of the push-wire terminals.




3.3 Loose wiring

Press down the "push button" and remove the cable from front.



3.4 Fixing conditions

Dry, acidfree, oilfree, fatfree. It is not allowed to exceed the maximum ambient temperature (ta) stated on the device. Minimum distances stated below are recommendations and depend on the actual luminaire. Is not suitable for fixing in corner.

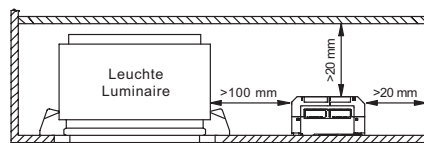

The LED module and all contact points within the wiring must be sufficiently insulated against 3 kV surge voltage.

3.5 Wiring guidelines

- All connections must be kept as short as possible to ensure good EMI behaviour.
- Mains leads should be kept apart from LED driver and other leads (ideally 5 – 10 cm distance)
- Max. length of output wires is 2 m.
- To comply with the EMC regulations run the secondary wires (LED module) in parallel.
- Incorrect wiring can damage LED modules.
- To avoid the damage of the Driver, the wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.).
- The current selection has to be installed in the accordance to the requirement of low voltage installation.
- Through wiring of mains is for connecting additional LED driver only. Max. permanent current of 13 A may not be exceeded.


3.6 Replace LED module

1. Mains off
2. Remove LED module
3. Wait for 20 seconds
4. Connect LED module again


Hot plug-in or output switching of LEDs is not permitted and may cause a very high current to the LEDs.

3.7 Current setting


700 mA: All terminals open



900 mA: Terminal 0 and 1 connected with 0 Ω wire (max. 6 cm length) or resistor ADV Plug Type A BR (article number: 28001771)

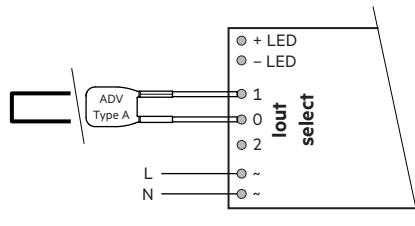

1,050 mA: Terminal 0 and 2 connected with 0 Ω wire (max. 6 cm length) or resistor ADV Plug Type A BR (article number: 28001771)

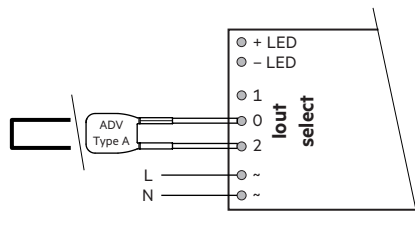


3.8 Mounting of device

Max. torque for fixing: 0.5 Nm/M4


4. Electrical values

Test at 230 V 50 Hz.


4.1 Efficiency vs load

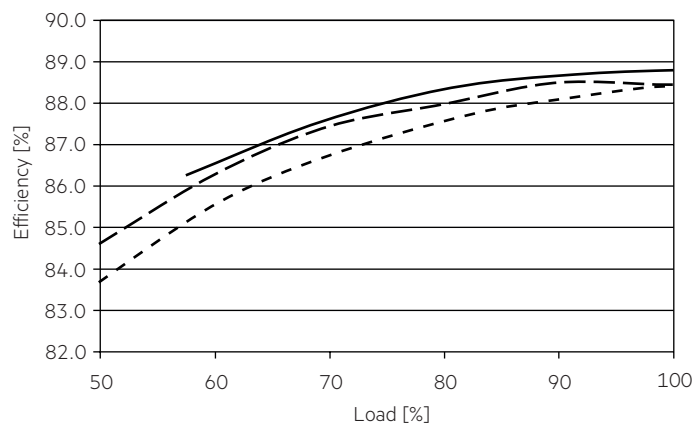


4.2 Power factor vs load

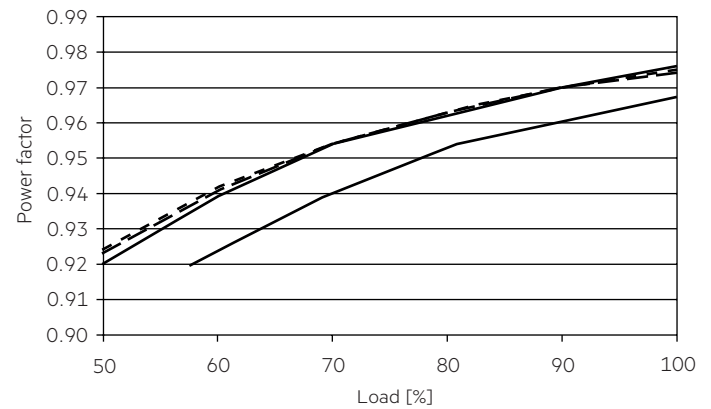


4.3 Input power vs load

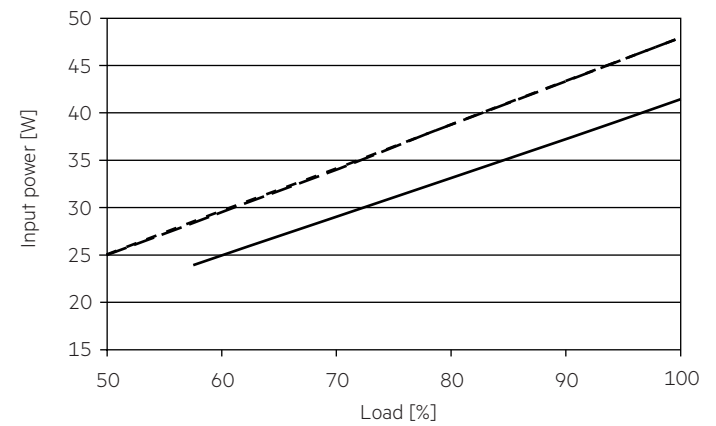

4.4 Input current vs load

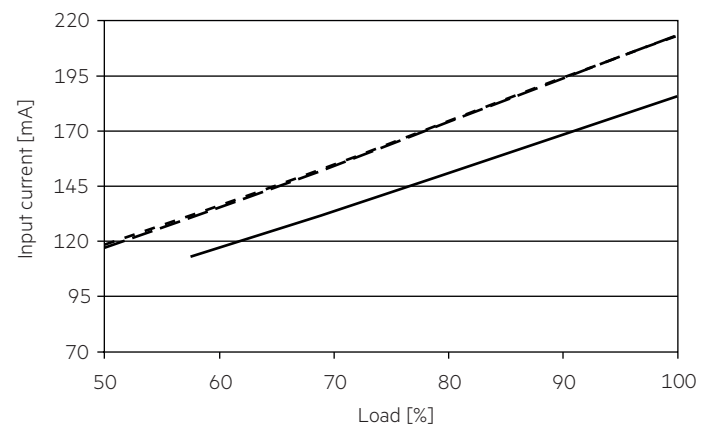

4.5 THD vs load

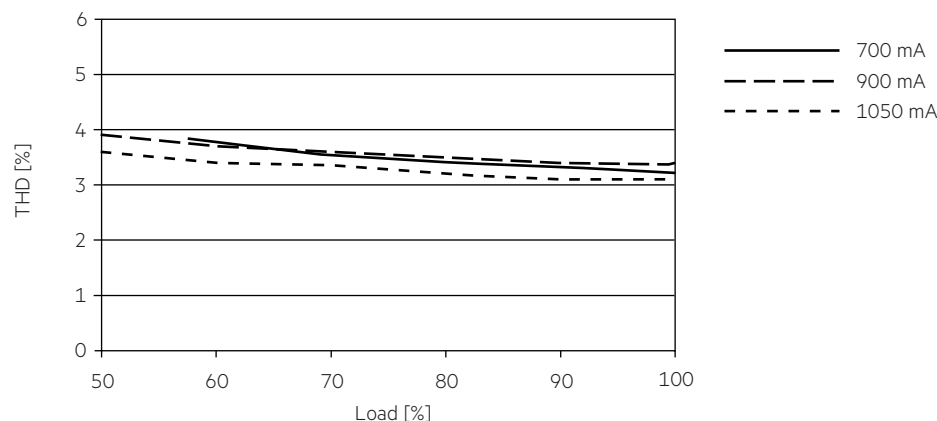

4.6 Maximum loading of automatic circuit breakers in relation to inrush current

| Automatic circuit breaker type | C10 | C13 | C16 | C20 | B10 | B13 | B16 | B20 | Inrush current | |
|---|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|------------------|--------|
| Installation Ø | 1.5 mm ² | 1.5 mm ² | 1.5 mm ² | 2.5 mm ² | 1.5 mm ² | 1.5 mm ² | 1.5 mm ² | 2.5 mm ² | I _{max} | Time |
| LC 42W 700/900/1050mA flexC SR ADV | 31 | 41 | 51 | 65 | 19 | 25 | 31 | 39 | 21 A | 250 µs |

These are max. values calculated out of inrush current! Please consider not to exceed the maximum rated continuous current of the circuit breaker. Calculation uses typical values from ABB series S200 as a reference. Actual values may differ due to used circuit breaker types and installation environment.

4.7 Harmonic distortion in the mains supply (at 230 V / 50 Hz and full load) in %

| | THD | 3. | 5. | 7. | 9. | 11. |
|---|------|-----|-----|-----|-----|-----|
| LC 42W 700/900/1050mA flexC SR ADV | < 10 | < 6 | < 4 | < 3 | < 2 | < 2 |

5. Functions

5.1 Short-circuit behaviour

In case of a short circuit on the output side (LED) the LED driver switches off. After elimination of the short-circuit fault the LED driver will recover automatically.

5.2 No-load operation

The LED driver works in burst working mode to provide a constant output voltage regulation which allows the application to be able to work safely when LED string opens due to a failure.

5.3 Overload protection

If the maximum load is exceeded by a defined internal limit, the LED driver will protect itself and LED may flicker. After elimination of the overload, the nominal operation is restored automatically.

5.4 Over temperature protection

The LED driver is protected against temporary thermal overheating. If the temperature limit is exceeded, the Driver switch off. It restarts automatically. The temperature protection is activated typically at 10 °C above $t_{c \text{ max}}$.

6. Miscellaneous

6.1 Insulation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an insulation test with 500 V_{DC} for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal.
The insulation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V_{AC} (or 1.414 x 1500 V_{DC}). To avoid damage to the electronic devices this test must not be conducted.

6.2 Conditions of use and storage

Humidity: 5 % up to max. 85 %,
not condensed
(max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The devices have to be within the specified temperature range (ta) before they can be operated.

6.3 Maximum number of switching cycles

All LED driver are tested with 50,000 switching cycles.

6.4 Additional information

Additional technical information at www.tridonic.com → Technical Data

Lifetime declarations are informative and represent no warranty claim.
No warranty if device was opened.