TRIDONIC

Modul LLE 24mm 2000lm CRI90 HV PRE

Modules LLE premium

LLE 24x280mm 2000lm HV PRE

LLE 24x560mm 4000lm HV PRE

Product description
_ Ideal for linear and panel lights
_ 2 terminals for serial wiring
_ Perfectly uniform light, even if several LED modules are used together in a line
_ Push terminals for quick and simple wiring of LED module to LED module
_ Broad portfolio from extruded lenses and covers available
_ HE ... High Efficiency, NM ... Nominal Mode, HO ... High Output
_ Long lifetime up to 102,000 hours
_ 5 years guarantee (conditions at https://www.tridonic.com/en/int/services/manufacturer-guarantee-conditions)

Optical properties
_ Colour temperatures 3,000 and 4,000 K
_ Efficacy up to 201 lm/W
_ High colour rendering index CRI > 90
_ High colour consistency (MacAdam 3) ①
_ Small luminous flux tolerances

Mechanical properties
_ Module dimension 24 x 280 mm and 24 x 560 mm (ZHAGA compliant)
_ Simple installation via clips or screws

System solution
_ Combine Tridonic's LED modules and dimmable drivers to achieve an outstanding system efficacy (configuration possible via https://setbuilder.tridonic.com/)

① Integral measurement over the complete module.

Website
http://www.tridonic.com/28005754

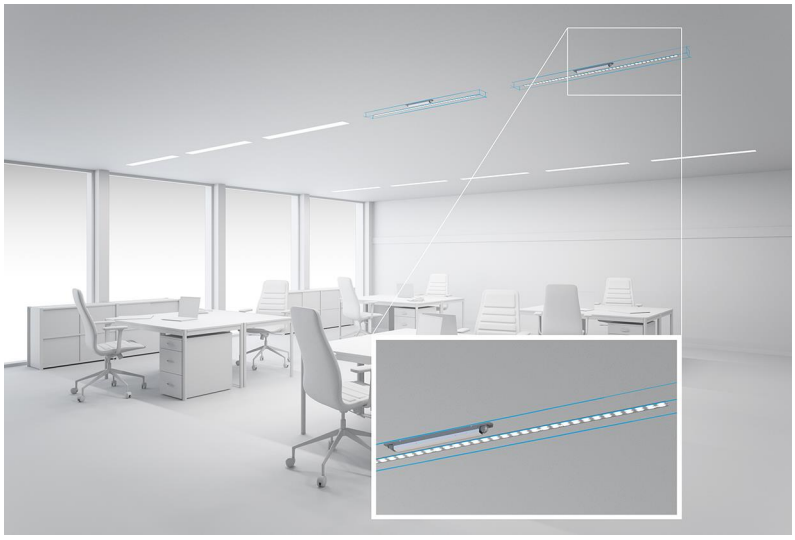

Linear | High bay | Decorative | Downlights | Spotlights | Free-standing | Area | Floor | Wall | Street

TRIDONIC

Modul LLE 24mm 2000lm CRI90 HV PRE

Modules LLE premium

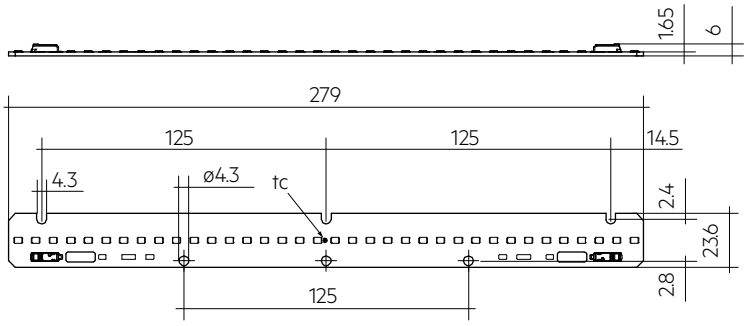

LLE 24x280mm 2000lm HV PRE

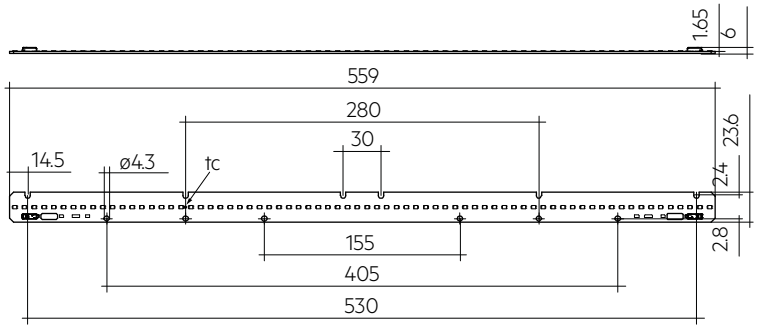

LLE 24x560mm 4000lm HV PRE

Ordering data

Type	Article number	Colour temperature	Packaging, carton	Weight per pc.
LLE 24x280mm 2000lm 930 HV PRE	**28005754**	3,000 K	108 pc(s).	0.023 kg
LLE 24x280mm 2000lm 940 HV PRE	**28005755**	4,000 K	108 pc(s).	0.023 kg
LLE 24x560mm 4000lm 930 HV PRE	**28005756**	3,000 K	108 pc(s).	0.041 kg
LLE 24x560mm 4000lm 940 HV PRE	**28005757**	4,000 K	108 pc(s).	0.041 kg

Technical data

Beam characteristic	120°
Ambient temperature ta	-40 … +65 °C
tp rated	50 °C
tc	95 °C
Irated	300 mA
Imax	900 mA
Max. permissible LF current ripple	1,000 mA
Max. permissible peak current	1,350 mA / max. 10 ms
Max. working voltage for insulation ②	350 V
Insulation test voltage	1.7 kV
Colour tolerance	3 SDCM
ESD classification	Severity level 2
Risk group (IEC 62471)	RG1 (I ≤ 900 mA), RG0 (I ≤ 221 mA)
Classification acc. to IEC 62031	Built-in
Type of protection	IP00
Lumen maintenance L70B50	102,000 h
Guarantee (conditions at www.tridonic.com)	5 Year(s)

Approval marks

Standards

IEC 62031, IEC 62471, IEC 61000-4-2, IEC 62778, IEC 61547

Specific technical data

Type	Article number	Photometric code③	Useful luminous flux at tp = 25 °C④	Expected luminous flux at tp rated⑤	Typ. forward current	Min. forward voltage at tp rated⑥	Max. forward voltage at tp = 25 °C⑥	Power consumption Pon at tp = 25 °C⑦	Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Colour rendering index CRI
Operating mode HE											
LLE 24x280mm 2000lm 930 HV PRE	**28005754**	930/359	–	607 lm	100 mA	30.4 V	33.2 V	–	–	194 lm/W	>90
LLE 24x280mm 2000lm 940 HV PRE	**28005755**	940/359	–	653 lm	100 mA	30.4 V	33.2 V	–	–	209 lm/W	>90
LLE 24x560mm 4000lm 930 HV PRE	**28005756**	930/359	–	1,214 lm	100 mA	60.9 V	66.3 V	–	–	194 lm/W	>90
LLE 24x560mm 4000lm 940 HV PRE	**28005757**	940/359	–	1,306 lm	100 mA	60.9 V	66.3 V	–	–	209 lm/W	>90
Operating mode NM											
LLE 24x280mm 2000lm 930 HV PRE	**28005754**	930/359	1,843 lm	1,794 lm	300 mA	31.6 V	34.4 V	9.8 W	187 lm/W	184 lm/W	>90
LLE 24x280mm 2000lm 940 HV PRE	**28005755**	940/359	1,982 lm	1,930 lm	300 mA	31.6 V	34.4 V	9.8 W	201 lm/W	198 lm/W	>90
LLE 24x560mm 4000lm 930 HV PRE	**28005756**	930/359	3,686 lm	3,589 lm	300 mA	63.2 V	68.7 V	19.7 W	187 lm/W	184 lm/W	>90
LLE 24x560mm 4000lm 940 HV PRE	**28005757**	940/359	3,964 lm	3,860 lm	300 mA	63.2 V	68.7 V	19.7 W	201 lm/W	198 lm/W	>90
Operating mode HO											
LLE 24x280mm 2000lm 930 HV PRE	**28005754**	930/359	–	4,523 lm	800 mA	33.9 V	36.7 V	–	–	163 lm/W	>90
LLE 24x280mm 2000lm 940 HV PRE	**28005755**	940/359	–	4,864 lm	800 mA	33.9 V	36.7 V	–	–	175 lm/W	>90
LLE 24x560mm 4000lm 930 HV PRE	**28005756**	930/359	–	9,046 lm	800 mA	67.8 V	73.3 V	–	–	163 lm/W	>90
LLE 24x560mm 4000lm 940 HV PRE	**28005757**	940/359	–	9,729 lm	800 mA	67.8 V	73.3 V	–	–	175 lm/W	>90

② If mounted with M4 screws with 7 mm head diameter.
③ The detailed explanation, see data sheet section 1.1.
④ Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.
⑤ Tolerance of expected light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %. Based on calculation.
⑥ Measurement tolerance forward voltage: ±0.1 V.
⑦ Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.

LINEAR COVER LLE

Accessory

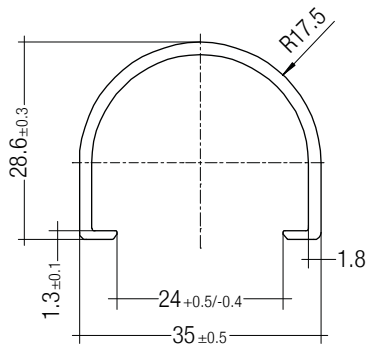

Product description

_ LINEAR COVER for LLE
_ Protection against direct touch for non-SELV applications (recommendation LLE 20: use all fixing points and screwed Endcap, recommendation LLE 24: use all fixing points)
_ Fast snap on mounting on to LLE 20: with M4 screws and plastic washers, to LLE 24: with clips or plastic washers
_ High transmission: transparent, semi-transparent and diffuse
_ Material: PMMA
_ Tolerances: ± 1 mm for 597 mm length (ends finished), + 10 mm from length 1,150 mm (ends raw)

Website
http://www.tridonic.com/28000338

Ordering data

Type	Article number	Colour	Length L	Efficiency	Packaging, carton	Weight per pc.
LINEAR COVER SY Transparent 1600mm	**28000338**	Transparent	1,600 mm	94 %	12 pc(s).	0.272 kg
LINEAR COVER SY Frosted 1800mm	**28000437**	Semi-transparent	1,800 mm	87 %	12 pc(s).	0.308 kg
LINEAR COVER SY Frosted 1600mm	**28000339**	Semi-transparent	1,600 mm	87 %	12 pc(s).	0.272 kg
LINEAR COVER SY Frosted 1500mm	**28000435**	Semi-transparent	1,500 mm	87 %	12 pc(s).	0.244 kg
LINEAR COVER SY Frosted 1200mm	**28000422**	Semi-transparent	1,200 mm	87 %	12 pc(s).	0.205 kg
LINEAR COVER SY Frosted 597mm	**28000340**	Semi-transparent	597 mm	87 %	12 pc(s).	0.102 kg
LINEAR COVER SY Diffuse 1800mm	**28000438**	Diffuse	1,800 mm	76 %	12 pc(s).	0.308 kg
LINEAR COVER SY Diffuse 1600mm	**28000341**	Diffuse	1,600 mm	76 %	12 pc(s).	0.272 kg
LINEAR COVER SY Diffuse 1500mm	**28000436**	Diffuse	1,500 mm	76 %	12 pc(s).	0.257 kg
LINEAR COVER SY Diffuse 1200mm	**28000434**	Diffuse	1,200 mm	76 %	12 pc(s).	0.205 kg
LINEAR COVER SY Diffuse 597mm	**28000342**	Diffuse	597 mm	76 %	12 pc(s).	0.102 kg

ACL ENDCAP LLE

Accessory



Product description

_ ENDCAP for LLE
_ PUSH-FIX: Fast snap on mounting (sheet thickness 0.5 – 1.0 mm), for drilling hole 4 mm
_ SCREW-FIX: Screw mounting with EJOT Delta PT WN 5451 30x8 (not included), tightening torque 0.7 Nm
_ Clip made of polycarbonate

Website

http://www.tridonic.com/28001037

Ordering data

Type	Article number	Colour	Packaging, carton	Weight per pc.
ACL ENDCAP LLE24 PUSH-FIX	**28001037**	White	480 pc(s).	0.003 kg
ACL ENDCAP LLE24 SCREW-FIX	**28002315**	White	480 pc(s).	0.003 kg

ACL LINEAR LENS 24mm

Accessory

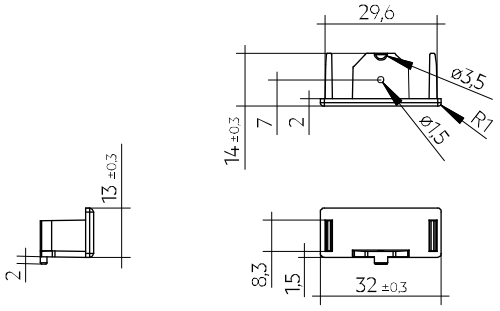

Product description LINEAR LENS

_ Linear lens for LLE 20 / 24
_ Available with different beam characteristics
_ Protection against direct touch for non-SELV applications (recommendation: use all fixing points)
_ Fast snap on mounting on to LLE 20: with M4 screws and plastic washers, to LLE 24: with clips or plastic washers
_ Recommendation: Fastening with screws and plastic washers, see 2.3 Heat sink specifications in data sheet
_ Material: PMMA
_ Available lengths: 1,200, 1,500 and 1,800 mm, Tolerance: + 10 mm (ends raw)
_ Max. permissible temperature 80 °C
_ Photometric data available on website

Product description Endcap

_ ENDCAP for LINEAR LENS 24mm INTENSE, ASY and DASY
_ Mounting by clipping in and screwing from below using screw EJOT Delta PT WN 5451 20x4, tightening torque 0.7 Nm
_ Made of Polyamide UL94 V0

Website

http://www.tridonic.com/28001428

Ordering data

Type	Article number	Length L	Beam characteristic	Efficiency	Packaging, carton	Weight per pc.
ACL LINEAR LENS 24x1200mm 60°	**28001428**	1,200 mm	60°	97 %	21 pc(s).	0.196 kg
ACL LINEAR LENS 24x1200mm 90°	**28001429**	1,200 mm	90°	97 %	21 pc(s).	0.165 kg
ACL LINEAR LENS 24x1500mm 60°	**28000953**	1,500 mm	60°	97 %	21 pc(s).	0.261 kg
ACL LINEAR LENS 24x1500mm 90°	**28000955**	1,500 mm	90°	97 %	21 pc(s).	0.221 kg
ACL LINEAR LENS 24x1200mm INTENSE	**28002024**	1,200 mm	40°	95 %	18 pc(s).	0.261 kg
ACL LINEAR LENS 24x1500mm INTENSE	**28002025**	1,500 mm	40°	95 %	18 pc(s).	0.326 kg
ACL LINEAR LENS 24x1800mm INTENSE	**28002026**	1,800 mm	40°	95 %	18 pc(s).	0.392 kg
ACL LINEAR LENS 24x1200mm BATWING	**28002027**	1,200 mm	batwing	95 %	18 pc(s).	0.275 kg
ACL LINEAR LENS 24x1500mm BATWING	**28002028**	1,500 mm	batwing	95 %	18 pc(s).	0.344 kg
ACL LINEAR LENS 24x1800mm BATWING	**28002029**	1,800 mm	batwing	95 %	18 pc(s).	0.412 kg
ACL LINEAR LENS 24x1200mm ASY	**28002030**	1,200 mm	asymmetric	95 %	18 pc(s).	0.250 kg
ACL LINEAR LENS 24x1500mm ASY	**28002031**	1,500 mm	asymmetric	95 %	18 pc(s).	0.312 kg
ACL LINEAR LENS 24x1800mm ASY	**28002032**	1,800 mm	asymmetric	95 %	18 pc(s).	0.375 kg
ACL LINEAR LENS 24x1200mm DASY	**28002033**	1,200 mm	double asymmetric	92 %	18 pc(s).	0.249 kg
ACL LINEAR LENS 24x1500mm DASY	**28002034**	1,500 mm	double asymmetric	92 %	18 pc(s).	0.311 kg
ACL LINEAR LENS 24x1800mm DASY	**28002035**	1,800 mm	double asymmetric	92 %	18 pc(s).	0.373 kg
ACL Endcap LENS 24mm PSF	**28002669**	–	–	–	3,600 pc(s).	0.003 kg

ACL CLIP 4.3mm

Accessory

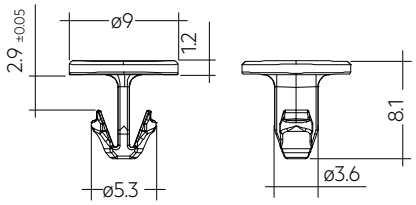

Product description

_ Clip for fixation of LED modules with 4.3 mm holes
_ Fast snap on mounting (sheet thickness 0.5 – 1.0 mm for PUSH-FIX and 1 – 2 mm for PUSH-FIX Long)
_ For drilling hole 4 mm
_ Clip made of polycarbonate
_ Minimum sales quantity 500 pcs.

Website

http://www.tridonic.com/28001036

Ordering data

Type	Article number	Colour	Packaging, bag ①	Weight per pc.
ACL CLIP 4.3mm PUSH-FIX	**28001036**	White	500 pc(s).	0.001 kg
ACL CLIP 4,3mm PUSH-FIX Long	**28002314**	Transparent	500 pc(s).	0.001 kg

① Minimum sales quantity 500 pcs.

ACL BRIDGE LLE24/40

Accessory

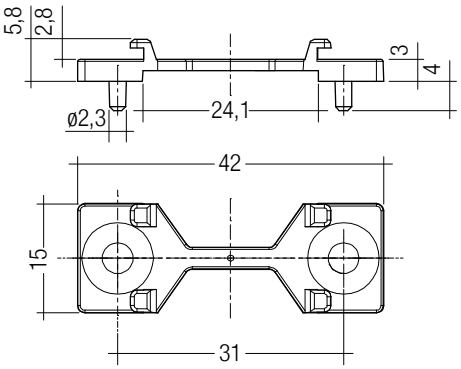

Product description

_ Enables the fixation of 24 mm wide Tridonic LED modules to fixtures made for 40 mm wide modules
_ Ideal for extruded aluminium gear trays made for 40 mm modules with pre-alignment knobs
_ Clip-on for LINEAR COVER and LINEAR LENS ①
_ For LLE 24 with 280 mm module minimum 2 bridges required
_ For LLE 24 with 560 mm module minimum 3 bridges required
_ Fixation via M3 or M4 countersunk screw, max. tightening torque 0.5 Nm
_ Material: white polycarbonate
_ Minimum sales quantity 600 pcs.

① Beam characteristics will change due to the elevated fixation (see photometric files for details).

Website
http://www.tridonic.com/28001205

Ordering data

Type	Article number	Colour	Packaging, carton	Weight per pc.
ACL BRIDGE LLE24/40 SCREW-FIX	**28001205**	White	600 pc(s).	0.001 kg

1. Standards

IEC 62031
IEC 62471
IEC 61000-4-2
IEC 62778
IEC 61547

1.1 Photometric code

Key for photometric code, e. g. 830 / 349

1st digit		2nd + 3rd digit	4th digit	5th digit	6th digit	
Code	CRI	Colour temperature in Kelvin x 100	MacAdam initial	MacAdam after 25% of the lifetime (max.6000h)	Luminous flux after 25% of the lifetime (max.6000h)	
					Code	Luminous flux
7	70 – 79				7	≥ 70 %
8	80 – 89				8	≥ 80 %
9	≥90				9	≥ 90 %

1.2 Energy classification

Type	Colour tempera-ture	Forward current	Energy classifi-cation	Energy consumption
LLE 24x280mm 2000lm 930 HV PRE	3,000 K	300 mA	C	10 kWh / 1,000 h
LLE 24x280mm 2000lm 940 HV PRE	4,000 K	300 mA	B	10 kWh / 1,000 h
LLE 24x560mm 4000lm 930 HV PRE	3,000 K	300 mA	C	20 kWh / 1,000 h
LLE 24x560mm 4000lm 940 HV PRE	4,000 K	300 mA	B	20 kWh / 1,000 h

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base https://eprel.ec.europa.eu/

2. Thermal details

2.1 tc point, ambient temperature and lifetime

The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For LLE a tp temperature of 50 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-40 … +80 °C

Operation only in non condensing environment.
Humidity during processing of the module should be between 30 to 70 %.

2.3 Heat sink values

LLE 24x280mm 2000lm PRE

ta	tp	Forward current	$R_{th, hs-a}$	Cooling area
25 °C	50 °C	300 mA	self cooling	
25 °C	50 °C	800 mA	4.38 K/W	152 cm²
35 °C	50 °C	300 mA	self cooling	
35 °C	50 °C	800 mA	2.34 K/W	285 cm²
40 °C	50 °C	300 mA	6.38 K/W	104 cm²
40 °C	50 °C	800 mA	1.32 K/W	504 cm²
45 °C	50 °C	300 mA	2.83 K/W	235 cm²
45 °C	50 °C	800 mA	0.30 K/W	2,188 cm²

LLE 24x560mm 4000lm PRE

ta	tp	Forward current	$R_{th, hs-a}$	Cooling area
25 °C	50 °C	300 mA	self cooling	
25 °C	50 °C	800 mA	2.19 K/W	304 cm²
35 °C	50 °C	300 mA	self cooling	
35 °C	50 °C	800 mA	1.17 K/W	569 cm²
40 °C	50 °C	300 mA	3.19 K/W	209 cm²
40 °C	50 °C	800 mA	0.66 K/W	1,007 cm²
45 °C	50 °C	300 mA	1.42 K/W	470 cm²
45 °C	50 °C	800 mA	0.15 K/W	4,375 cm²

Notes
The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation. Depending on the heat sink a heat conducting paste or heat conducting film might be necessary to keep the specified tp temperature.

For applications with a small distance between LED module and lens, screw mounting is recommended to ensure a reliable thermal connection between LED module and cooling surface.

3. Installation / wiring

3.1 Electrical supply/choice of LED driver

LLE modules from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED driver which complies with the relevant standards. The use of LED driver from Tridonic in combination with LLE modules guarantees the necessary protection for safe and reliable operation.

If a LED driver other than Tridonic is used, it must provide the following protection:
- Short-circuit protection
- Overload protection
- Overtemperature protection

LLE modules must be supplied by a constant current LED driver. Operation with a constant voltage LED driver will lead to an irreversible damage of the module.

Wrong polarity can damage the LLE.

The LLE module is designed for serial wiring.

LLE can be operated either from SELV LED drivers or from LED drivers with LV output voltage.

LLE are basic insulated up to 350 V (if mounted with M4 screws with head diameter 7 mm on a flat surface) against ground and can be mounted directly on earthed metal parts of the luminaire.
The insulation is dependent on the mounting situation in the luminaire. The requirements for basic insulation must be ensured in the individual built-in situation.
At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.

3.2 Wiring

Wiring example

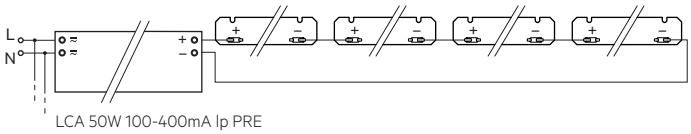

3.3 Wiring type and cross section

For wiring use stranded wire with ferrules or solid wire from 0.2 to 0.75 mm². For the push-wire connection you have to strip the insulation (8–9 mm).



To remove the wires use a suitabel tool (e.g. Microcon release pin) or through twist and pull .

3.4 Mounting instruction

None of the components of the LLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.

The LED modules are mounted onto a heat sink with min. 12 screws per module or ACL CLIP 4.3mm.

Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.
Avoid corrosive atmosphere during usage and storage.

3.5 EOS/ESD safety guidelines

The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at: http://www.tridonic.com/esd-protection

4. Lifetime

4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value.
L70 means that the LED module will give 70 % of its initial luminous flux.
This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.
The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value.
In addition the percentage of failed modules (fatal failure) is characterized by the C value.

4.2 Lumen maintenance for LLE 24mm HV PRE

Forward current	tp temperature	L90 / B10	L90 / B50	L80 / B10	L80 / B50	L70 / B10	L70 / B50
100 mA	40 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	50 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	60 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	70 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	80 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	85 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
300 mA	40 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	50 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	60 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	70 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	80 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	85 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
800 mA	40 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	50 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	60 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	70 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	80 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h
	85 °C	52k h	52k h	>102k h	>102k h	>102k h	>102k h

L00C03 >102k h. At tp rated, based on 10 swichting cycles per day.

4.3 Switching capability

100,000 cycles

Tridonic test according to IEC 62717 Cl 10.3.3
30 s on / 30 s off at Imax

5. Electrical values

5.1 Declaration of electrical parameters

Irated ... Nominal operating current the module is designed for.

Imax ... Max. permissible continuous operating current incl. The tolerances of the LED driver.

Max. permissible LF current ripple ... Max. output current of the LED driver incl. Tolerances and LF current ripple must not exceed this value.

Max. permissible peak current ... The max. output peak current of the LED driver must not exceed this value.

5.2 Typ. forward voltage vs. forward current

LLE 24x280mm 2000lm 9xx HV PRE

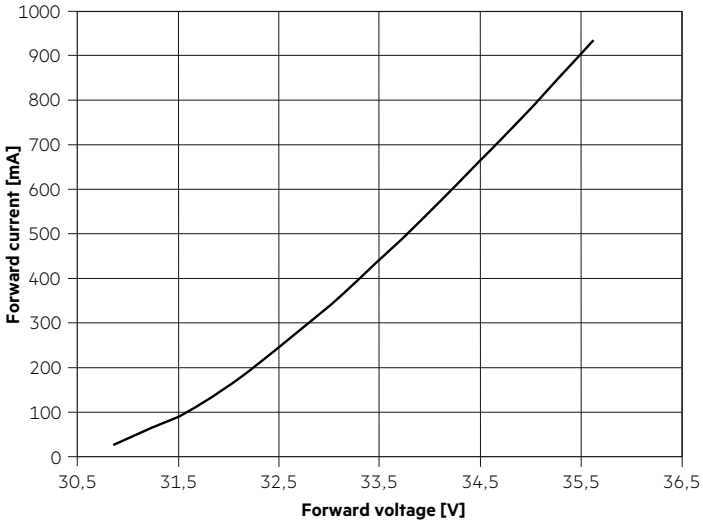

LLE 24x560mm 4000lm 9xx HV PRE

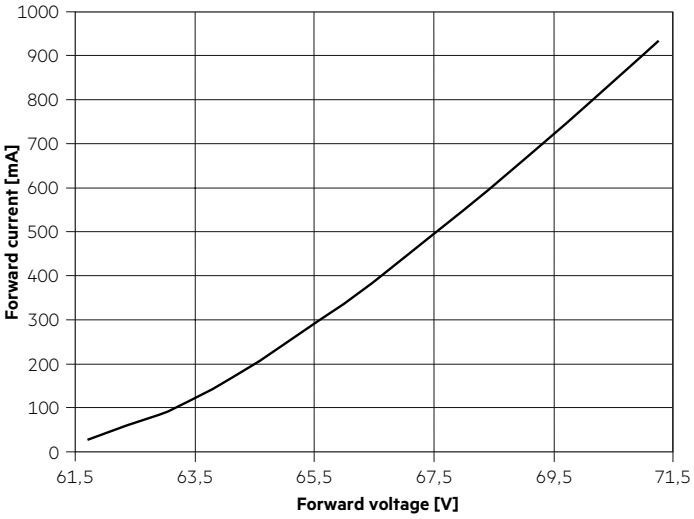

5.3 Forward voltage vs. tc temperature

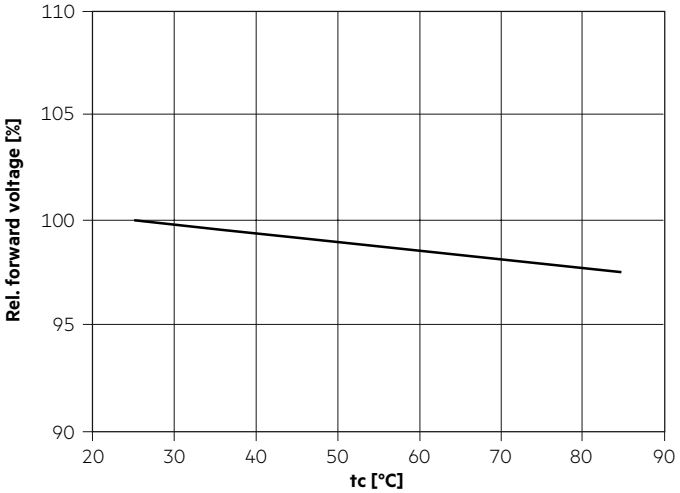

The diagrams are based on statistic values.
The real values can be different.

6. Photometric characteristics

6.1 Coordinates and tolerances according to CIE 1931

The specified colour coordinates are integral measured by current impulse of 165 mA and a duration of 100 ms.
The ambient temperature of the measurement is ta = 25 °C.
The measurement tolerance of the colour coordinates are ± 0.01.

3,000 K

	x0	y0
Centre	0.4338	0.4030

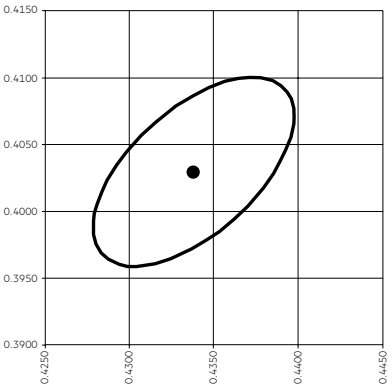

MacAdam Ellipse: 3SDCM

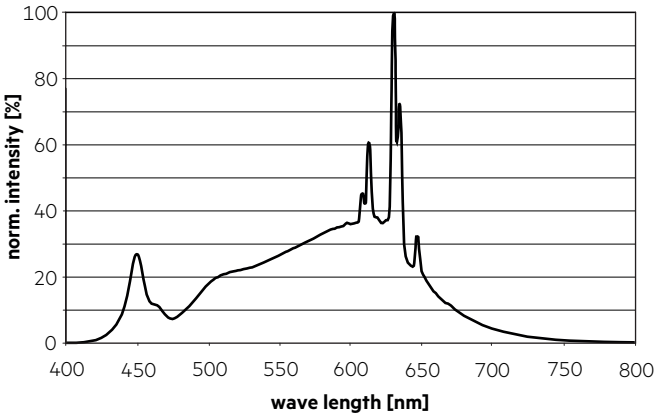

TM30		CRI	
Rf	Rg	Ra	R9
92	100	93	54

Colour vector graphic

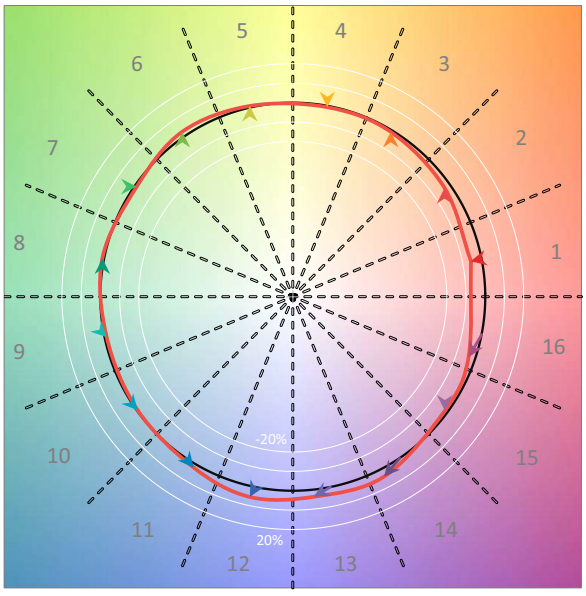

Reference source
Test source

MacAdam Ellipse: 3SDCM

4,000 K

	x0	y0
Center	0.3818	0.3797

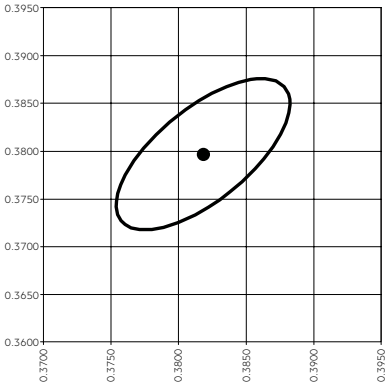

MacAdam Ellipse: 3SDCM

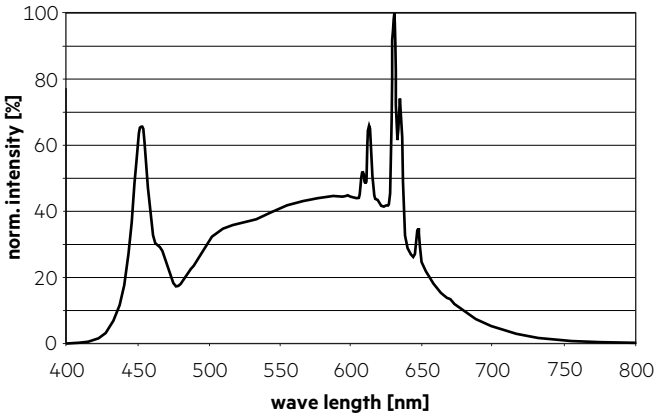

TM30		CRI	
Rf	Rg	Ra	R9
88	97	92	58

Colour vector graphic

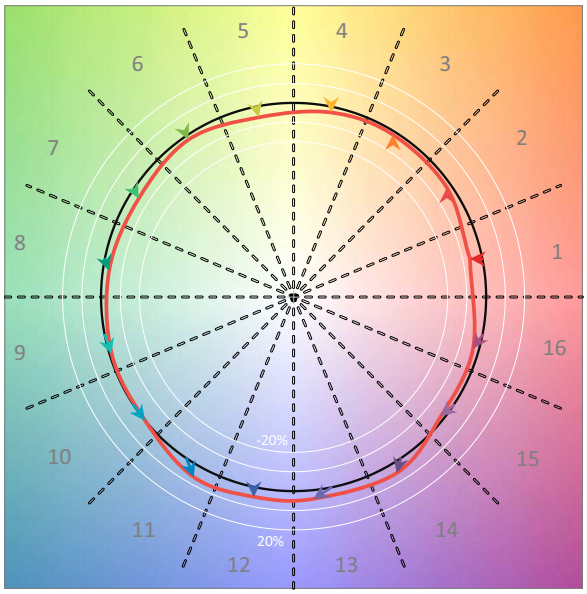

Reference source
Test source

6.2 Light distribution

The optical design of the LLE product line ensures optimum homogeneity for the light distribution.

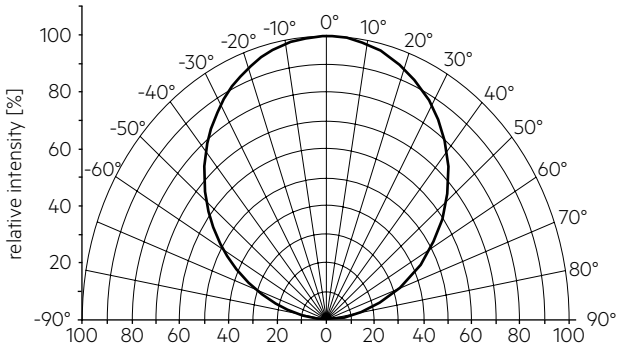

The colour temperature is measured integral over the complete module. The single LED light points can have deviations in the colour coordinates within MacAdam 3.
To ensure an ideal mixture of colours and a homogeneous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 4 cm) should be used.

6.3 Relative luminous flux vs. tc temperature

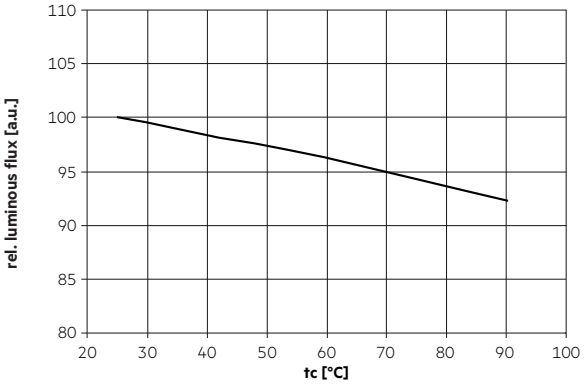

6.4 Relative luminous flux vs. operating current

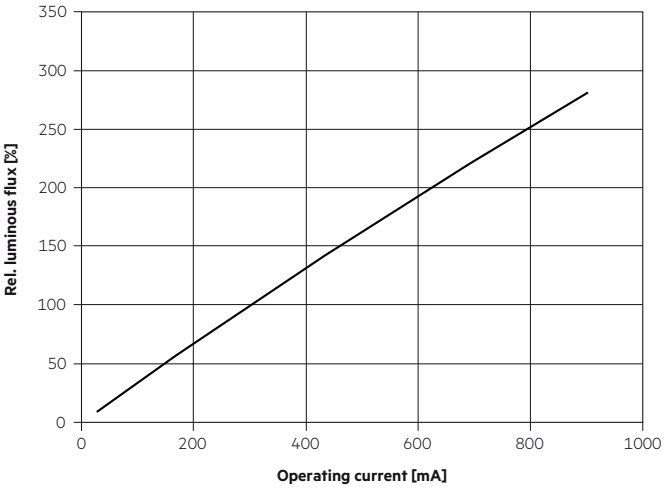

The diagrams are based on statistic values.
The real values can be different.

7. Miscellaneous

7.1 Additional information

Additional technical information at www.tridonic.com → Technical Data

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base https://eprel.ec.europa.eu/

Guarantee conditions at www.tridonic.com → Services

Lifetime declarations are informative and represent no warranty claim.