TRIDONIC

Module RLE 2x6 EXC2 OTD Z19 new variant

Modules RLE excite



Product description

_ High efficiency outdoor modules
_ Suitable for harsh and humid outdoor conditions
_ Tested acc. to salt spray test (IEC 60068-2-52) and harmful gas test (GR-1217-CORE)
_ Huge performance temperature range from -40 … +105 °C
_ Surge tested (+/- to earth) 6 kV with Tridonic LED driver
_ Zhaga Book 19 certified
_ For use with IP6x lenses (e.g. LEDiL STRADA IP-2x6)
_ Push-in terminals for simple and quick wiring
_ HE … High Efficiency, NM … Nominal Mode, HO … High Output
_ Long lifetime up to 150,000 hours
_ 8 years guarantee (conditions at https://www.tridonic.com/en/int/services/manufacturer-guarantee-conditions)

Optical properties

_ Colour temperatures 2,200 K, 2,700 K, 3,000 K, 3,500 K, 4,000 K, 5,000 K, 5,700 K and 6,500 K
_ Efficacy of the LED module up to 204 lm/W
_ Two colour rendering index to fit the application: CRI > 70 high efficency, CRI > 80 for high colour rendering
_ Small luminous flux tolerances

Mechanical properties

_ Module dimension 45 x 146 mm
_ Installation of the module together with lens in the luminaire by means of an M3 screw

System solution

_ Integrate compatible partner products into your final system solution: https://www.tridonic.com/en/int/products/accessories#partner

Website


http://www.tridonic.com/28006748



Linear | High bay | Decorative | Downlights | Spotlights | Free-standing | Area | Floor | Wall | Street

Module RLE 2x6 EXC2 OTD Z19 new variant

Modules RLE excite

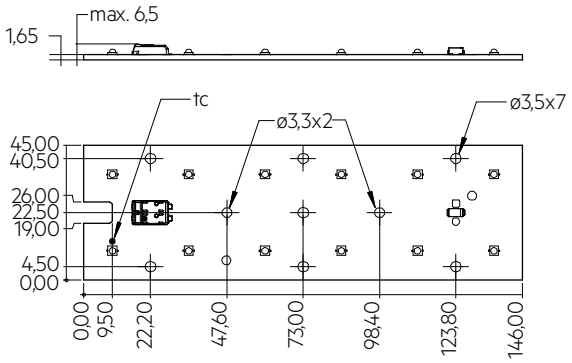

Ordering data

Type	Article number	Colour temperature	Packaging, carton	Weight per pc.
RLE 2x6 3000lm 722 HP EXC2 OTD Z19	**28006748**	2,200 K	80 pc(s).	0.028 kg
RLE 2x6 3000lm 727 HP EXC2 OTD Z19	**28006749**	2,700 K	80 pc(s).	0.028 kg
RLE 2x6 3000lm 730 HP EXC2 OTD Z19	**28006750**	3,000 K	80 pc(s).	0.028 kg
RLE 2x6 3000lm 735 HP EXC2 OTD Z19	**28006751**	3,500 K	80 pc(s).	0.028 kg
RLE 2x6 3000lm 740 HP EXC2 OTD Z19	**28006752**	4,000 K	80 pc(s).	0.028 kg
RLE 2x6 3000lm 750 HP EXC2 OTD Z19	**28006753**	5,000 K	80 pc(s).	0.028 kg
RLE 2x6 3000lm 757 HP EXC2 OTD Z19	**28006768**	5,700 K	80 pc(s).	0.028 kg
RLE 2x6 3000lm 765 HP EXC2 OTD Z19	**28006754**	6,500 K	80 pc(s).	0.028 kg
RLE 2x6 3000lm 827 HP EXC2 OTD Z19	**28006755**	2,700 K	80 pc(s).	0.028 kg
RLE 2x6 3000lm 830 HP EXC2 OTD Z19	**28006756**	3,000 K	80 pc(s).	0.028 kg
RLE 2x6 3000lm 835 HP EXC2 OTD Z19	**28006757**	3,500 K	80 pc(s).	0.028 kg
RLE 2x6 3000lm 840 HP EXC2 OTD Z19	**28006758**	4,000 K	80 pc(s).	0.028 kg
RLE 2x6 3000lm 850 HP EXC2 OTD Z19	**28006759**	5,000 K	80 pc(s).	0.028 kg

Technical data

Beam characteristic	120°
Ambient temperature ta	-40 … +80 °C
tp rated	75 °C
tc	105 °C
Irated	700 mA
Imax	1,200 mA
Max. permissible LF current ripple	1,320 mA
Max. permissible peak current	2,000 mA / max. 10 ms
Max. working voltage for insulation ⓘ	670 V
Insulation test voltage	2.34 kV
CTI of the printed circuit board	> 600
Colour tolerance	5 SDCM
ESD classification	Severity level 4
Risk group (IEC 62471) for Ra >70	RG2 (Ethr ≤ 734 lx, RG1 at d ≥ 270 cm)
Risk group (IEC 62471) for Ra >80	RG2 (Ethr ≤ 1076 lx, RG1 at d ≥ 190 cm)
Classification acc. to IEC 62031	Built-in
Type of protection	IP00
Lumen maintenance L70B50	150,000 h
Guarantee (conditions at www.tridonic.com)	8 Year(s)

Approval marks

RoHS

Standards

IEC 62031, IEC 62778, IEC 62471, IEC 61000-4-2, IEC 60068-2-52, UL 8750, GR-1217-CORE

Specific technical data

Type	Article number	Photometric code	Useful luminous flux at tp = 25 °C②	Expected luminous flux at tp rated③	Typ. forward current	Min. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C④	Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Colour rendering index CRI
Operating mode HE											
RLE 2x6 3000lm 722 HP EXC2 OTD Z19	**28006748**	722/359	–	2,653 lm	500 mA	31.8 V	34.9 V	–	–	161 lm/W	>70
RLE 2x6 3000lm 727 HP EXC2 OTD Z19	**28006749**	727/359	–	2,919 lm	500 mA	31.8 V	34.9 V	–	–	177 lm/W	>70
RLE 2x6 3000lm 730 HP EXC2 OTD Z19	**28006750**	730/359	–	3,184 lm	500 mA	31.8 V	34.9 V	–	–	193 lm/W	>70
RLE 2x6 3000lm 735 HP EXC2 OTD Z19	**28006751**	735/359	–	3,095 lm	500 mA	31.8 V	34.9 V	–	–	188 lm/W	>70
RLE 2x6 3000lm 740 HP EXC2 OTD Z19	**28006752**	740/359	–	3,361 lm	500 mA	31.8 V	34.9 V	–	–	204 lm/W	>70
RLE 2x6 3000lm 750 HP EXC2 OTD Z19	**28006753**	750/359	–	3,272 lm	500 mA	31.8 V	34.9 V	–	–	198 lm/W	>70
RLE 2x6 3000lm 757 HP EXC2 OTD Z19	**28006768**	757/359	–	3,272 lm	500 mA	31.8 V	34.9 V	–	–	198 lm/W	>70
RLE 2x6 3000lm 765 HP EXC2 OTD Z19	**28006754**	765/359	–	3,272 lm	500 mA	31.8 V	34.9 V	–	–	198 lm/W	>70
RLE 2x6 3000lm 827 HP EXC2 OTD Z19	**28006755**	827/359	–	2,680 lm	500 mA	32.0 V	35.3 V	–	–	161 lm/W	>80
RLE 2x6 3000lm 830 HP EXC2 OTD Z19	**28006756**	830/359	–	2,823 lm	500 mA	32.0 V	35.3 V	–	–	170 lm/W	>80
RLE 2x6 3000lm 835 HP EXC2 OTD Z19	**28006757**	835/359	–	2,867 lm	500 mA	32.0 V	35.3 V	–	–	173 lm/W	>80
RLE 2x6 3000lm 840 HP EXC2 OTD Z19	**28006758**	840/359	–	2,973 lm	500 mA	32.0 V	35.3 V	–	–	179 lm/W	>80
RLE 2x6 3000lm 850 HP EXC2 OTD Z19	**28006759**	850/359	–	2,982 lm	500 mA	32.0 V	35.3 V	–	–	180 lm/W	>80
Operating mode NM											
RLE 2x6 3000lm 722 HP EXC2 OTD Z19	**28006748**	722/359	3,680 lm	3,590 lm	700 mA	32.4 V	35.5 V	24.0 W	153 lm/W	153 lm/W	>70
RLE 2x6 3000lm 727 HP EXC2 OTD Z19	**28006749**	727/359	3,870 lm	3,949 lm	700 mA	32.4 V	35.5 V	24.0 W	161 lm/W	168 lm/W	>70
RLE 2x6 3000lm 730 HP EXC2 OTD Z19	**28006750**	730/359	4,390 lm	4,308 lm	700 mA	32.4 V	35.5 V	24.0 W	183 lm/W	183 lm/W	>70
RLE 2x6 3000lm 735 HP EXC2 OTD Z19	**28006751**	735/359	4,320 lm	4,188 lm	700 mA	32.4 V	35.5 V	24.0 W	180 lm/W	178 lm/W	>70
RLE 2x6 3000lm 740 HP EXC2 OTD Z19	**28006752**	740/359	4,520 lm	4,547 lm	700 mA	32.4 V	35.5 V	24.0 W	188 lm/W	193 lm/W	>70
RLE 2x6 3000lm 750 HP EXC2 OTD Z19	**28006753**	750/359	4,450 lm	4,427 lm	700 mA	32.4 V	35.5 V	24.0 W	185 lm/W	188 lm/W	>70
RLE 2x6 3000lm 757 HP EXC2 OTD Z19	**28006768**	757/359	4,450 lm	4,427 lm	700 mA	32.4 V	35.5 V	24.0 W	185 lm/W	188 lm/W	>70
RLE 2x6 3000lm 765 HP EXC2 OTD Z19	**28006754**	765/359	4,450 lm	4,427 lm	700 mA	32.4 V	35.5 V	24.0 W	185 lm/W	188 lm/W	>70
RLE 2x6 3000lm 827 HP EXC2 OTD Z19	**28006755**	827/359	3,720 lm	3,680 lm	700 mA	32.6 V	35.9 V	24.3 W	153 lm/W	156 lm/W	>80
RLE 2x6 3000lm 830 HP EXC2 OTD Z19	**28006756**	830/359	3,820 lm	3,875 lm	700 mA	32.6 V	35.9 V	24.3 W	157 lm/W	164 lm/W	>80
RLE 2x6 3000lm 835 HP EXC2 OTD Z19	**28006757**	835/359	3,860 lm	3,936 lm	700 mA	32.6 V	35.9 V	24.3 W	159 lm/W	167 lm/W	>80
RLE 2x6 3000lm 840 HP EXC2 OTD Z19	**28006758**	840/359	4,260 lm	4,083 lm	700 mA	32.6 V	35.9 V	24.3 W	175 lm/W	173 lm/W	>80
RLE 2x6 3000lm 850 HP EXC2 OTD Z19	**28006759**	850/359	4,270 lm	4,095 lm	700 mA	32.6 V	35.9 V	24.3 W	176 lm/W	173 lm/W	>80
Operating mode HO											
RLE 2x6 3000lm 722 HP EXC2 OTD Z19	**28006748**	722/359	–	5,080 lm	1,050 mA	33.2 V	36.3 V	–	–	141 lm/W	>70
RLE 2x6 3000lm 727 HP EXC2 OTD Z19	**28006749**	727/359	–	5,588 lm	1,050 mA	33.2 V	36.3 V	–	–	155 lm/W	>70
RLE 2x6 3000lm 730 HP EXC2 OTD Z19	**28006750**	730/359	–	6,096 lm	1,050 mA	33.2 V	36.3 V	–	–	169 lm/W	>70
RLE 2x6 3000lm 735 HP EXC2 OTD Z19	**28006751**	735/359	–	5,927 lm	1,050 mA	33.2 V	36.3 V	–	–	164 lm/W	>70
RLE 2x6 3000lm 740 HP EXC2 OTD Z19	**28006752**	740/359	–	6,435 lm	1,050 mA	33.2 V	36.3 V	–	–	178 lm/W	>70
RLE 2x6 3000lm 750 HP EXC2 OTD Z19	**28006753**	750/359	–	6,265 lm	1,050 mA	33.2 V	36.3 V	–	–	174 lm/W	>70
RLE 2x6 3000lm 757 HP EXC2 OTD Z19	**28006768**	757/359	–	6,265 lm	1,050 mA	33.2 V	36.3 V	–	–	174 lm/W	>70
RLE 2x6 3000lm 765 HP EXC2 OTD Z19	**28006754**	765/359	–	6,265 lm	1,050 mA	33.2 V	36.3 V	–	–	174 lm/W	>70
RLE 2x6 3000lm 827 HP EXC2 OTD Z19	**28006755**	827/359	–	5,185 lm	1,050 mA	33.5 V	36.8 V	–	–	143 lm/W	>80
RLE 2x6 3000lm 830 HP EXC2 OTD Z19	**28006756**	830/359	–	5,461 lm	1,050 mA	33.5 V	36.8 V	–	–	150 lm/W	>80
RLE 2x6 3000lm 835 HP EXC2 OTD Z19	**28006757**	835/359	–	5,547 lm	1,050 mA	33.5 V	36.8 V	–	–	153 lm/W	>80
RLE 2x6 3000lm 840 HP EXC2 OTD Z19	**28006758**	840/359	–	5,753 lm	1,050 mA	33.5 V	36.8 V	–	–	158 lm/W	>80
RLE 2x6 3000lm 850 HP EXC2 OTD Z19	**28006759**	850/359	–	5,770 lm	1,050 mA	33.5 V	36.8 V	–	–	159 lm/W	>80

① If mounted with M3 screws.
② Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.
③ Tolerance of expected light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %. Based on calculation.
④ Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.

1. Standards

EC 62031
IEC 62778
IEC 62471
IEC 61000-4-2
IEC 60068-2-52
UL 8750 (for dry and damp locations)
GR-1217-CORE

1.1 Photometric code

Key for photometric code, e. g. 830 / 359

1st digit		2nd + 3rd digit	4th digit	5th digit	6th digit	
Code	CRI	Colour temperature in Kelvin x 100	MacAdam initial	MacAdam after 25% of the lifetime (max.6000h)	Luminous flux after 25% of the lifetime (max.6000h)	
					Code	Luminous flux
7	70 – 79				7	≥ 70 %
8	80 – 89				8	≥ 80 %
9	≥90				9	≥ 90 %

1.2 Energy classification

Type	Colour temperature	Forward current	Energy classification	Energy consumption
RLE 2x6 3000lm 722 HP EXC2 OTD Z19	2,200 K	700 mA	D	24 kWh / 1,000 h
RLE 2x6 3000lm 727 HP EXC2 OTD Z19	2,700 K	700 mA	D	24 kWh / 1,000 h
RLE 2x6 3000lm 730 HP EXC2 OTD Z19	3,000 K	700 mA	C	24 kWh / 1,000 h
RLE 2x6 3000lm 735 HP EXC2 OTD Z19	3,500 K	700 mA	C	24 kWh / 1,000 h
RLE 2x6 3000lm 740 HP EXC2 OTD Z19	4,000 K	700 mA	C	24 kWh / 1,000 h
RLE 2x6 3000lm 750 HP EXC2 OTD Z19	5,000 K	700 mA	C	24 kWh / 1,000 h
RLE 2x6 3000lm 757 HP EXC2 OTD Z19	5,700 K	700 mA	C	24 kWh / 1,000 h
RLE 2x6 3000lm 765 HP EXC2 OTD Z19	6,500 K	700 mA	C	24 kWh / 1,000 h
RLE 2x6 3000lm 827 HP EXC2 OTD Z19	2,700 K	700 mA	D	25 kWh / 1,000 h
RLE 2x6 3000lm 830 HP EXC2 OTD Z19	3,000 K	700 mA	D	25 kWh / 1,000 h
RLE 2x6 3000lm 835 HP EXC2 OTD Z19	3,500 K	700 mA	D	25 kWh / 1,000 h
RLE 2x6 3000lm 840 HP EXC2 OTD Z19	4,000 K	700 mA	C	25 kWh / 1,000 h
RLE 2x6 3000lm 850 HP EXC2 OTD Z19	5,000 K	700 mA	C	25 kWh / 1,000 h

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base https://eprel.ec.europa.eu/

2. Thermal details

2.1 tc point, ambient temperature and lifetime

The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For RLE a tp temperature of 75 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-40 … +80 °C

Operation only in non condensing environment.
Humidity during processing of the module should be between 0 to 70 %.

2.3 Thermal design and heat sink

The rated life of LED products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the RLE will be greatly reduced or the RLE may be destroyed.

2.4 Heat sink values

RLE 2x6 3000lm EXC2 OTD

ta	tp	Forward current	$R_{th, hs-a}$	Cooling area
25 °C	75 °C	500 mA	10.32 K/W	65 cm²
25 °C	75 °C	700 mA	7.56 K/W	88 cm²
25 °C	75 °C	1,050 mA	4.19 K/W	159 cm²
35 °C	75 °C	500 mA	8.25 K/W	81 cm²
35 °C	75 °C	700 mA	6.04 K/W	110 cm²
35 °C	75 °C	1,050 mA	3.35 K/W	199 cm²
40 °C	75 °C	500 mA	7.22 K/W	92 cm²
40 °C	75 °C	700 mA	5.29 K/W	126 cm²
40 °C	75 °C	1,050 mA	2.93 K/W	228 cm²
45 °C	75 °C	500 mA	6.19 K/W	108 cm²
45 °C	75 °C	700 mA	4.53 K/W	147 cm²
45 °C	75 °C	1,050 mA	2.51 K/W	266 cm²
50 °C	75 °C	500 mA	5.15 K/W	129 cm²
50 °C	75 °C	700 mA	3.78 K/W	177 cm²
50 °C	75 °C	1,050 mA	2.09 K/W	319 cm²
55 °C	75 °C	500 mA	4.12 K/W	162 cm²
55 °C	75 °C	700 mA	3.02 K/W	221 cm²
55 °C	75 °C	1,050 mA	1.67 K/W	399 cm²
60 °C	75 °C	500 mA	3.09 K/W	216 cm²
60 °C	75 °C	700 mA	2.26 K/W	295 cm²
60 °C	75 °C	1,050 mA	1.25 K/W	533 cm²

Notes
The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation. Depending on the heat sink a heat conducting paste or heat conducting film might be necessary to keep the specified tp temperature.

3. Installation / wiring

3.1 Electrical supply/choice of LED driver

RLE modules from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED driver which complies with the relevant standards. The use of LED driver from Tridonic in combination with RLE modules guarantees the necessary protection for safe and reliable operation.

If a LED driver other than Tridonic is used, it must provide the following protection:
- Short-circuit protection
- Overload protection
- Overtemperature protection

RLE modules must be supplied by a constant current LED driver. Operation with a constant voltage LED driver will lead to an irreversible damage of the module.

If RLE modules are wired in parallel and a wire breaks or a complete module fails then the current passing through the other module increases. This may reduce its life considerably. In addition there can be slight differences in light output caused by tolerances.

RLE modules can be operated either from SELV LED drivers or from LED drivers with LV output voltage.

RLE modules are basic insulated up to 370 V if mounted with M3 screws or 670 V if mounted with M3 screws and lens (e.g. LEDiL Strada IP-2x6) against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the LED driver (also against earth) is above 370 V / 670 V, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction. At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.


3.2 Integrated protection

The basic protection level consists of protection against reverse polarity.

3.3 Wiring




3.4 Wiring examples

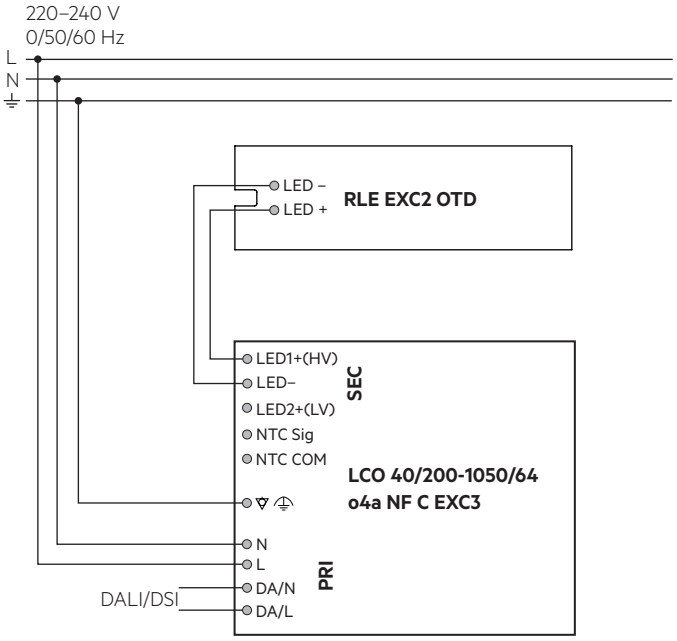

3.5 Wiring type and cross section

For wiring use stranded wire with ferrules or solid wire from 0.2 to 0.75 mm². For the push-wire connection you have to strip the insulation (7–9 mm).



Inserting stranded wires / removing wires by lightly pressing on the push button.

3.6 Mounting instruction

None of the components of the RLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.

The LED modules are mounted onto a heat sink with M3 screws per module.

Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.
Avoid corrosive atmosphere during usage and storage.

3.7 EOS/ESD safety guidelines

The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at:
http://www.tridonic.com/esd-protection

4. Lifetime

4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value.
L70 means that the LED module will give 70 % of its initial luminous flux. This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.
The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value. In addition the percentage of failed modules (fatal failure) is characterized by the C value.

Operation below 200 mA may reduce lumen maintenance.

4.2 Lumen maintenance

Typ. forward current	tp temperature	L90 / B10	L90 / B50	L80 / B10	L80 / B50	L70 / B10	L70 / B50
500 mA	55 °C	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h
	85 °C	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h
	105 °C	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h
700 mA	55 °C	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h
	85 °C	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h
	105 °C	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h
1,050 mA	55 °C	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h
	85 °C	136,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h	>150,000 h
	105 °C	51,000 h	130,000 h	117,000 h	>150,000 h	>150,000 h	>150,000 h


L00C03 >150k h. At tprated and Irated.

For 2200 K product variants the lumen maintenance values are based on LM-80 test data up to and including 700 mA. No LM-80 test data for this specific CCT is available for higher forward currents.


5. Electrical values

5.1 Typ. forward voltage vs. forward current

RLE 2x6 3000lm xxx HP EXC2 OTD

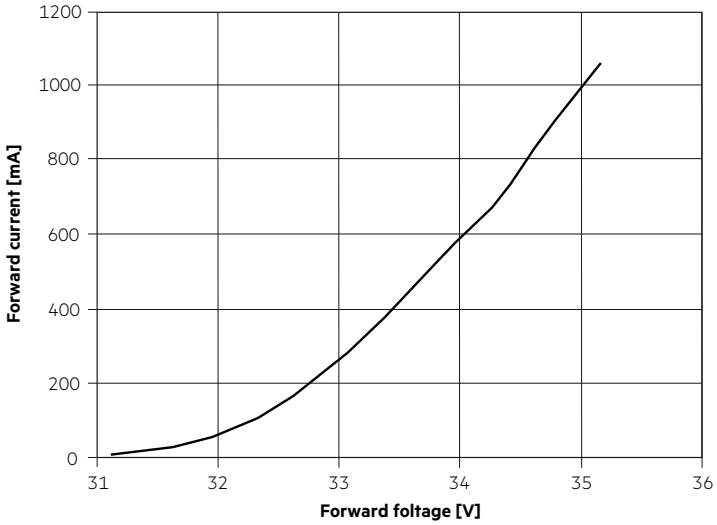

5.2 Forward voltage vs. tc temperature

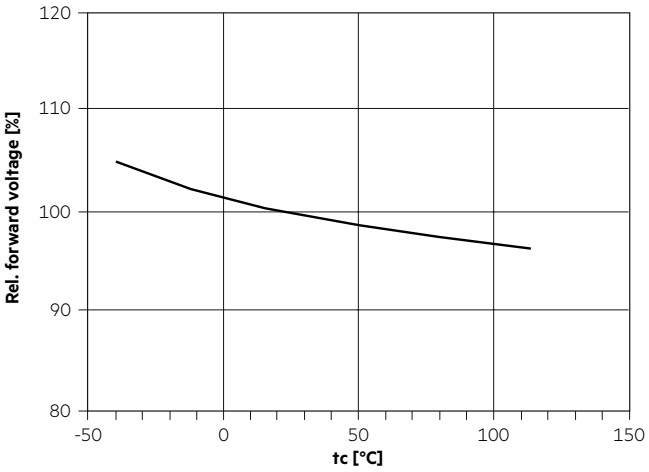

The diagrams are based on statistic values.
The real values can be different.


6. Photometric characteristics

6.1 Coordinates and tolerances according to CIE 1931


The specified colour coordinates are integral measured by current impulse of 700 mA and a duration of 100 ms.
The ambient temperature of the measurement is tp = 75 °C steady state.
The measurement tolerance of the colour coordinates are ± 0.01.

2,200 K, CRI 70

	x0	y0
Centre	0.5020	0.4156

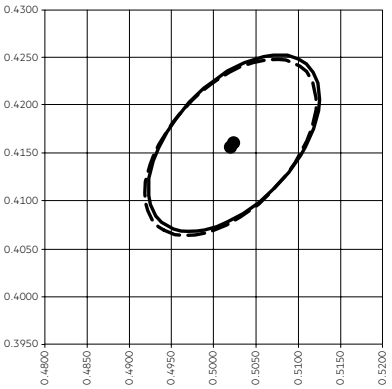


MacAdam Ellipse: 5SDCM (tp = 75 °C)
MacAdam Ellipse: 5SDCM (ta = 25 °C)

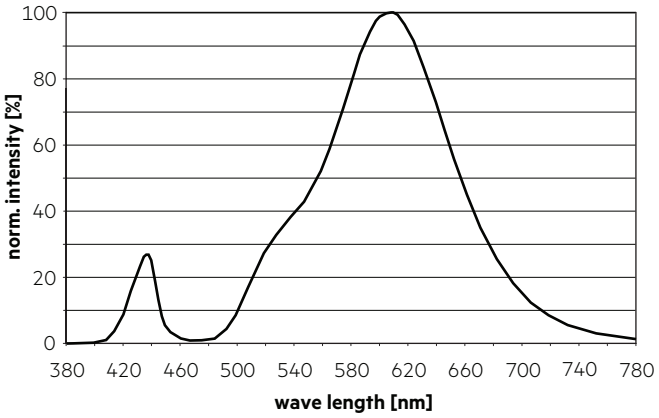


2,700 K, CRI 80

	x0	y0
Centre	0.4577	0.4098

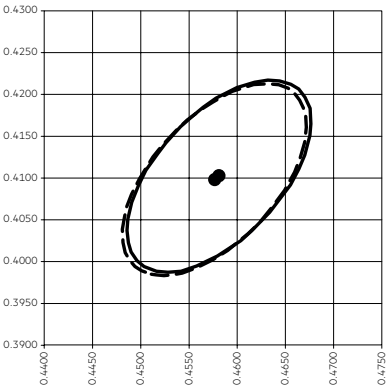


MacAdam Ellipse: 5SDCM (tp = 75 °C)
MacAdam Ellipse: 5SDCM (ta = 25 °C)

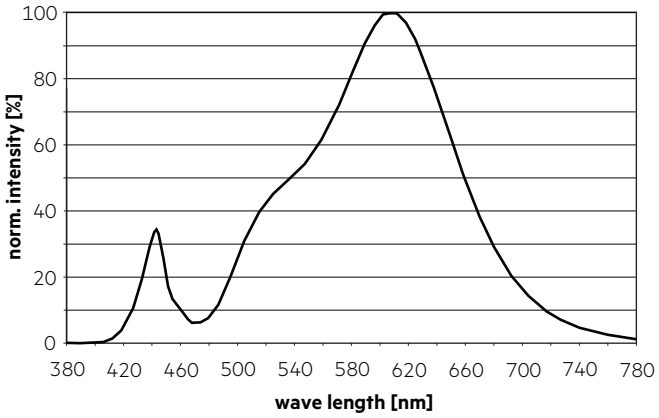


2,700 K, CRI 70

	x0	y0
Centre	0.4577	0.4098

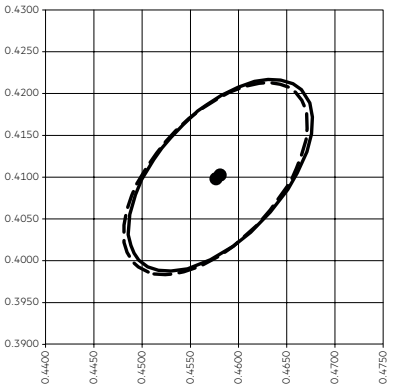


MacAdam Ellipse: 5SDCM (tp = 75 °C)

MacAdam Ellipse: 5SDCM (ta = 25 °C)

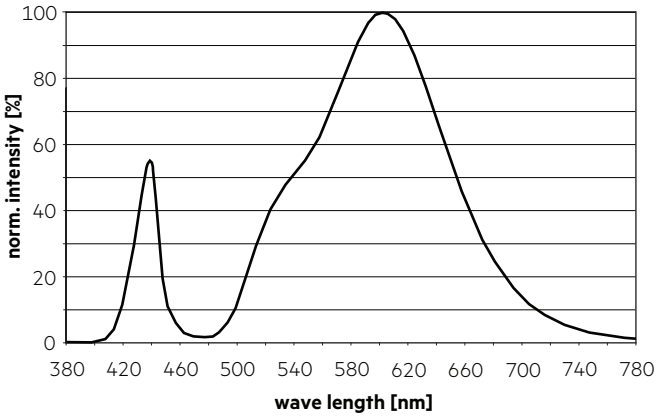


3,000 K, CRI 80

	x0	y0
Centre	0.4339	0.4032

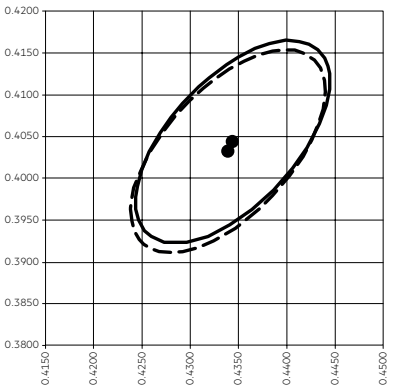


MacAdam Ellipse: 5SDCM (tp = 75 °C)

MacAdam Ellipse: 5SDCM (ta = 25 °C)

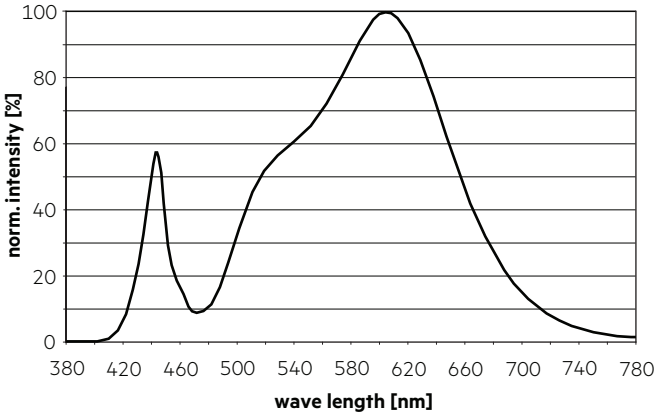


3,000 K, CRI 70

	x0	y0
Centre	0.4339	0.4032

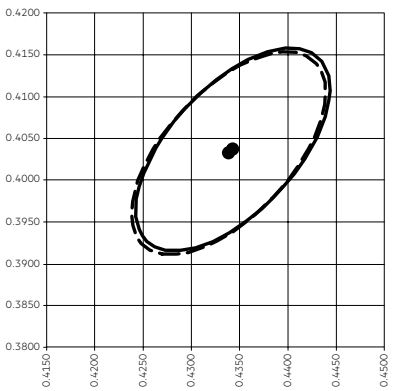


MacAdam Ellipse: 5SDCM (tp = 75 °C)


MacAdam Ellipse: 5SDCM (ta = 25 °C)

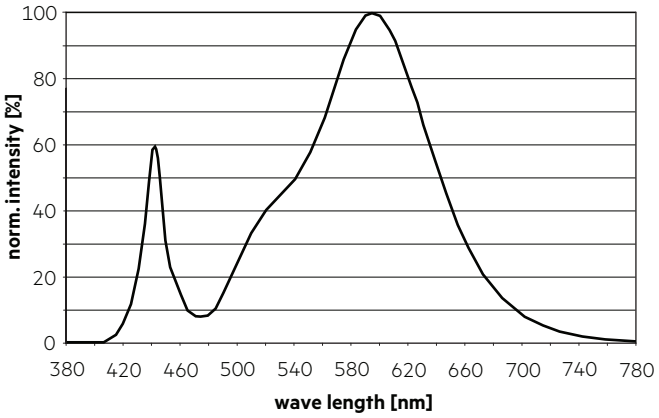

3,500 K, CRI 80

	x0	y0
Centre	0.4077	0.3929

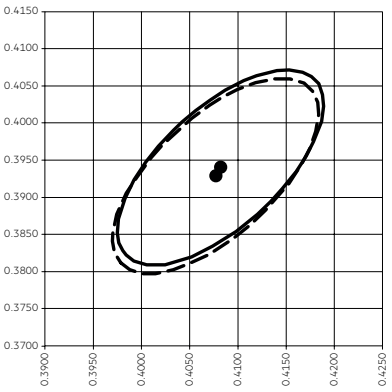

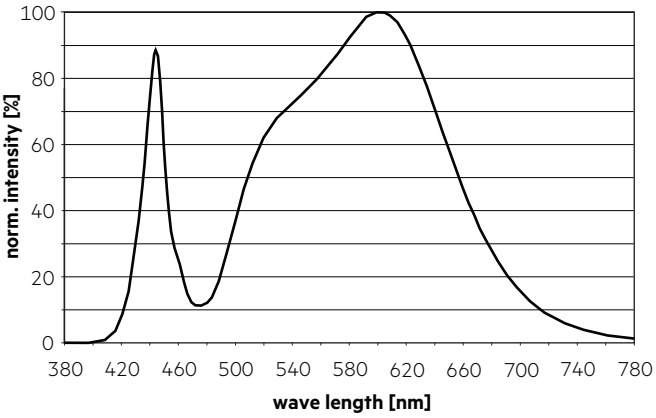



MacAdam Ellipse: 5SDCM (tp = 75 °C)

MacAdam Ellipse: 5SDCM (ta = 25 °C)

3,500 K, CRI 70

	x0	y0
Centre	0.4077	0.3929

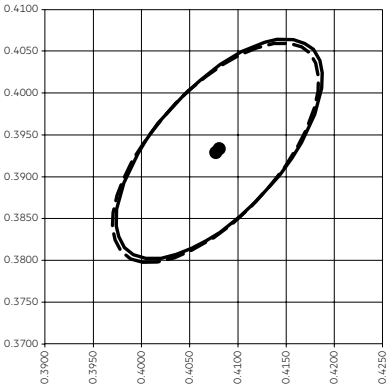

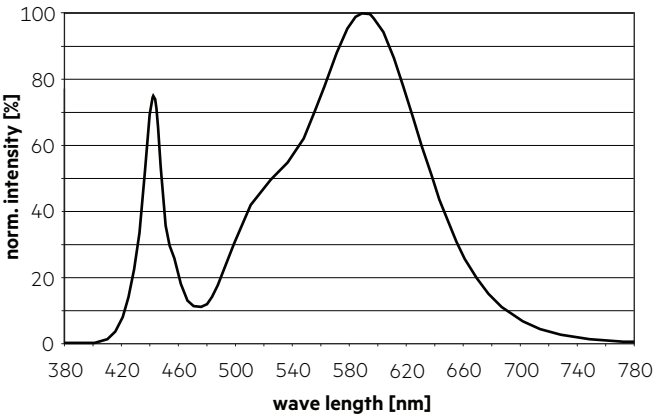



MacAdam Ellipse: 5SDCM (tp = 75 °C)

MacAdam Ellipse: 5SDCM (ta = 25 °C)

4,000 K, CRI 80

	x0	y0
Centre	0.3818	0.3796

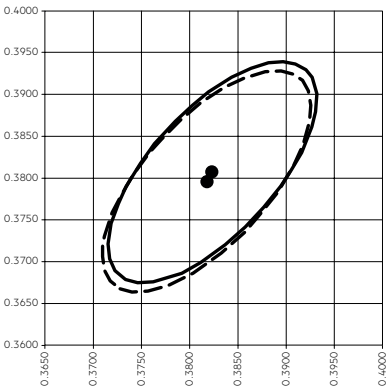

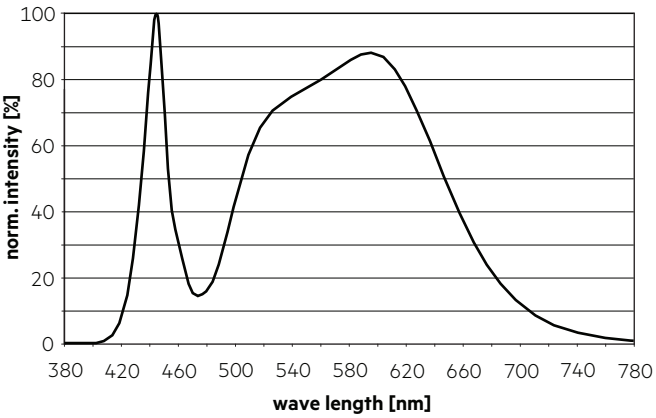


MacAdam Ellipse: 5SDCM (tp = 75 °C)

MacAdam Ellipse: 5SDCM (ta = 25 °C)


4,000 K, CRI 70

	x0	y0
Centre	0.3818	0.3796

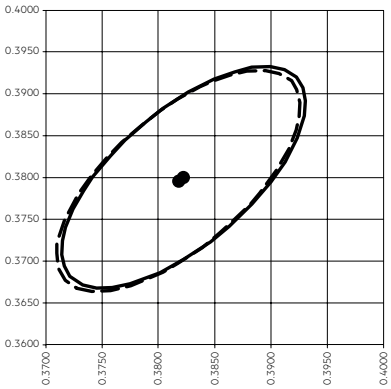


MacAdam Ellipse: 5SDCM (tp = 75 °C)

MacAdam Ellipse: 5SDCM (ta = 25 °C)

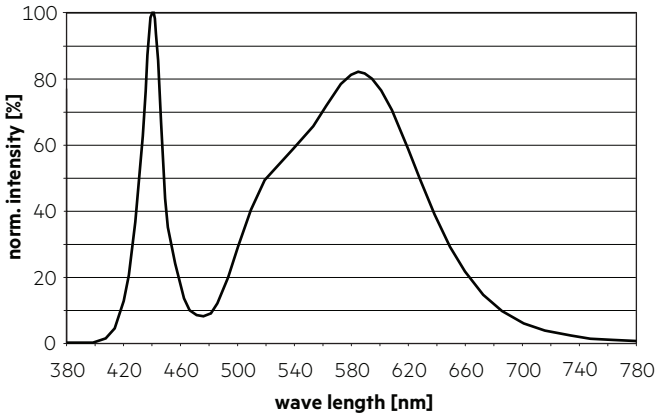


5,000 K, CRI 80

	x0	y0
Centre	0.3446	0.3551

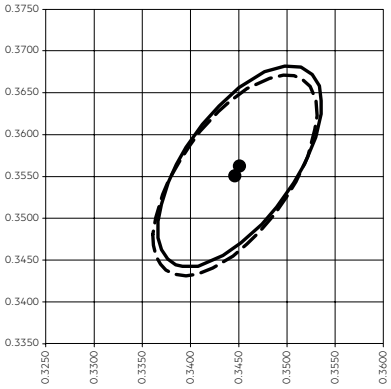


MacAdam Ellipse: 5SDCM (tp = 75 °C)

MacAdam Ellipse: 5SDCM (ta = 25 °C)

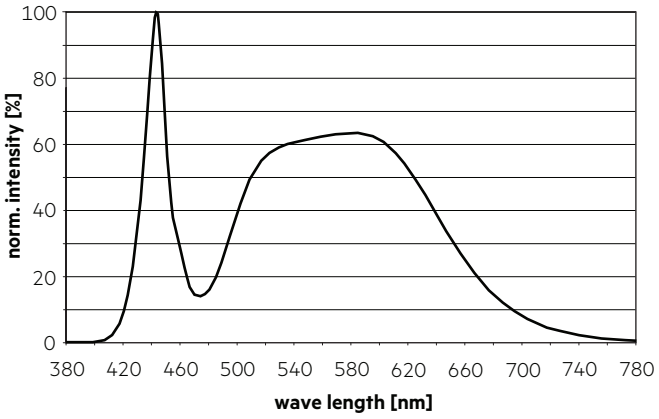


5,000 K, CRI 70

	x0	y0
Centre	0.3446	0.3551

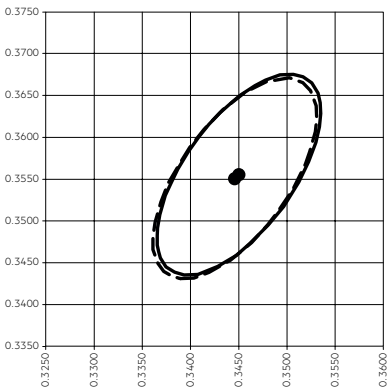


MacAdam Ellipse: 5SDCM (tp = 75 °C)

MacAdam Ellipse: 5SDCM (ta = 25 °C)

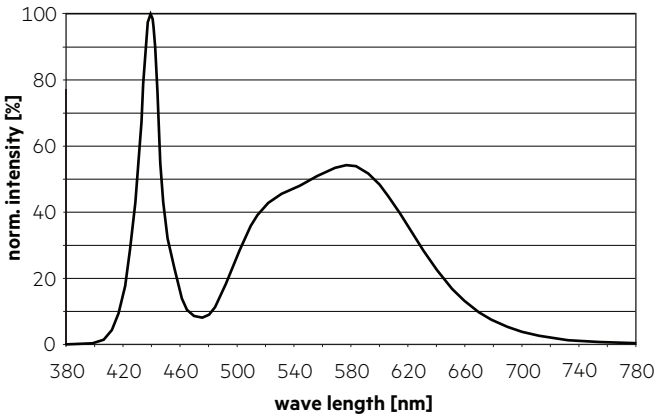


5,700 K, CRI 70

	x0	y0
Centre	0.3287	0.3425

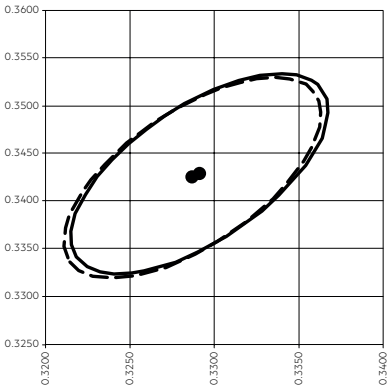


MacAdam Ellipse: 5SDCM (tp = 75 °C)

MacAdam Ellipse: 5SDCM (ta = 25 °C)

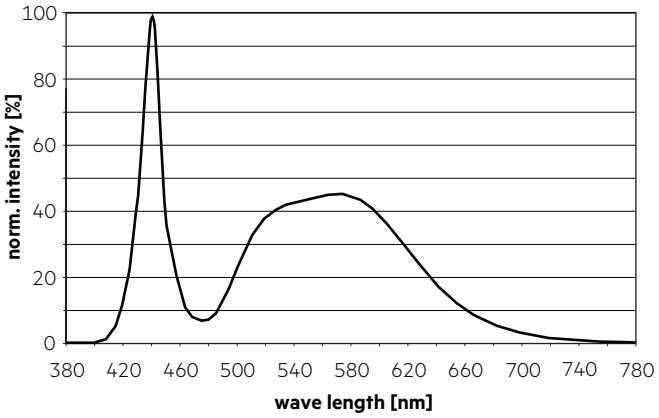


6,500 K, CRI 70

	x0	y0
Centre	0.3123	0.3285

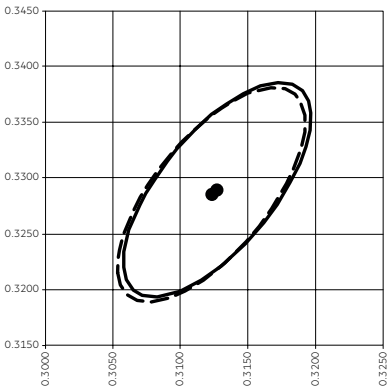

MacAdam Ellipse: 5SDCM (tp = 75 °C)

MacAdam Ellipse: 5SDCM (ta = 25 °C)

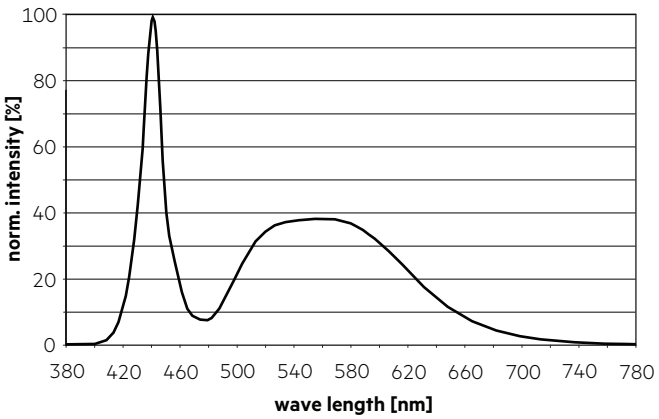


6.2 Spectral G-Index

CCT	CRI	G-Index
2,200 K	70	2.3
2,700 K	70	1.8
3,000 K	70	1.5
3,500 K	70	1.2
4,000 K	70	1.0
5,000 K	70	0.6
5,700 K	70	0.5
6,500 K	70	0.3
2,700 K	80	1.8
3,000 K	80	1.5
3,500 K	80	1.2
4,000 K	80	1.0
5,000 K	80	0.8

Based on typical spectral distribution measured at 25°C and Irated.

6.3 Light distribution


RLE G1 OTD modules are designed to be compatible with 50 x 50 mm lense arrays with 25.4 mm pitch distance. This allows multiple light distributions.

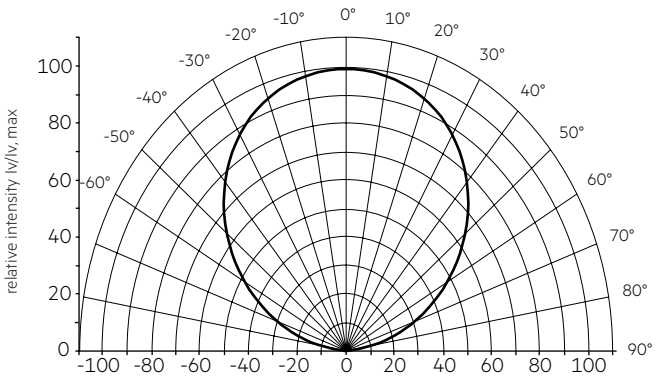

The colour temperature is measured integral over the complete module. The single LED light points can have deviations in the colour coordinates within MacAdam 4.


6.4 Relative luminous flux vs. tc temperature

CRI 80

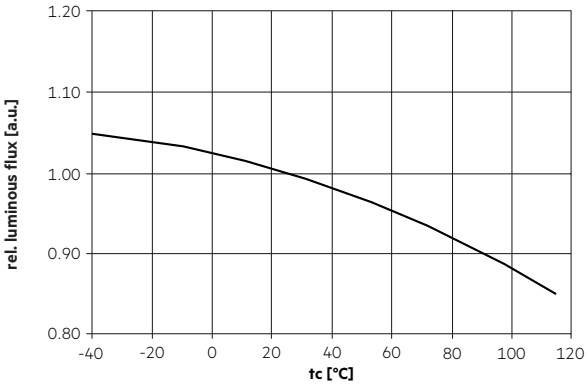

6.5 Relative luminous flux vs. operating current

CRI 80

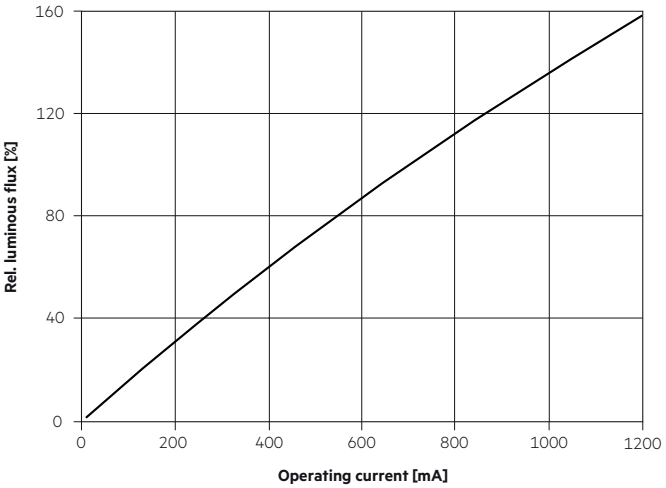

The diagrams are based on statistic values.
The real values can be different.

7. Miscellaneous

7.1 Additional information

Additional technical information at www.tridonic.com → Technical Data

Guarantee conditions at www.tridonic.com → Services

Lifetime declarations are informative and represent no warranty claim.