



# 产品认证证书

证书编号: CQC24010434901

发证日期: 2025 年 03 月 04 日  
有效期至: 2029 年 06 月 12 日

委托人名称 及注册地址	锐高照明电子(上海)有限公司 中国(上海)自由贸易试验区富特北路 215 号第二层 F12 部位
制造商名称 及注册地址	锐高照明电子(上海)有限公司 中国(上海)自由贸易试验区富特北路 215 号第二层 F12 部位
生产企业名称 及生产地址	锐高照明电子(深圳)有限公司 深圳市龙华区观澜街道库坑社区龙华大道 7301 号 A3 栋一层二层
产品名称和系列、 规格、型号	灯具用电源导轨系统(导轨接合器, IP20, II类, LED 控制装置(SELV 输出), 适宜直接安装在普通可燃材料表面, ta:35°C) 见附页。220-240V~ 50/60Hz
产品标准和技术要求	GB/T 13961-2008;GB 17625.1-2022;GB/T 17743-2021;GB/T 7000.1-2023
认证模式	产品型式试验+获证后监督

上述产品符合 CQC12-465431-2024 认证规则的要求, 特发此证。  
本证书为变更证书, 证书首次颁发日期: 2024 年 06 月 13 日  
证书有效期内本证书的有效性依据发证机构的定期监督获得保持。

可通过扫描下方二维码或登录国家认监委网站(www.cnca.gov.cn)查验证书信息



签发: 谢肇煦



中国质量认证中心  
CHINA QUALITY CERTIFICATION CENTRE



# CERTIFICATE OF PRODUCT CERTIFICATION

CERTIFICATE NO.: CQC24010434901

Valid from: Mar.04,2025

Valid until:Jun.12,2029

<b>NAME AND REGISTERED ADDRESS OF THE APPLICANT</b>	Tridonic (Shanghai) Co., Ltd. F12, 2nd Floor, No.215, North Fute Road, China (Shanghai) Pilot Free Trade Zone, Shanghai City, P.R.China
<b>NAME AND REGISTERED ADDRESS OF THE MANUFACTURER</b>	Tridonic (Shanghai) Co., Ltd. F12, 2nd Floor, No.215, North Fute Road, China (Shanghai) Pilot Free Trade Zone, Shanghai City, P.R.China
<b>NAME AND LOCATION OF THE FACTORY</b>	TridonicAtco (Shenzhen) Co., Ltd. 1-2F,Building A3, 7301 Longhua Avenue, Kukeng Community, Guanlan Street, Longhua District, Shenzhen
<b>PRODUCT NAME, MODEL AND SPECIFICATION</b>	Electrical Supply Track System For Luminaires (Track Coupler ( ClassII ) , Integrated With A.C. Supplied Electronic Controlgear For LED Modules,Suitable For Direct Mounting On Normally Flammable Material, ta:35°C) See Appendix. 220-240V~ 50/60Hz
<b>THE STANDARDS AND TECHNICAL REQUIREMENTS FOR THE PRODUCTS</b>	GB/T 13961-2008;GB 17625.1-2022;GB/T 17743-2021;GB/T 7000.1-2023
<b>TYPE OF CERTIFICATION SCHEMES</b>	Type Testing of Product + Follow up Factory Inspection

This is to certify that the above mentioned product(s) complies with the requirements of certification rules of CQC12-465431-2024.

Date of original issued: Jun.13,2024

The validity of the certificate is subject to positive result of the regular follow up inspection by issuing certification body until the expiry date.

The certificate information is available through the QR code below or CNCA's website: [www.cnca.gov.cn](http://www.cnca.gov.cn)



SIGNATURE:

谢肇煦



中国质量认证中心  
CHINA QUALITY CERTIFICATION CENTRE



# 产品认证证书

证书编号: CQC24010434901

第 1 页 / 共 2 页

本证书及附件应同时使用, 信息查验说明见证书页

纸号:

序号	产品型号	使用的LED控制装置		拨码开关	外壳颜色																				
		型号	参数																						
1.	LC 44/900-1050/4 2 flexC T-B SNC4	LC 44/900-1050/42 flexC T-B SNC4、	输出: 900/950/1000/1050mA (恒流可调), Max. 59Vdc, 配套光源: Max. 44.1W LED模块	<table border="1"> <thead> <tr> <th>Irated (mA)</th> <th>Pin1</th> <th>Pin2</th> <th>tc (°C)</th> </tr> </thead> <tbody> <tr> <td>900</td> <td>OFF</td> <td>OFF</td> <td>88</td> </tr> <tr> <td>950</td> <td>OFF</td> <td>ON</td> <td>89</td> </tr> <tr> <td>1000</td> <td>ON</td> <td>OFF</td> <td>90</td> </tr> <tr> <td>1050</td> <td>ON</td> <td>ON</td> <td>90</td> </tr> </tbody> </table>	Irated (mA)	Pin1	Pin2	tc (°C)	900	OFF	OFF	88	950	OFF	ON	89	1000	ON	OFF	90	1050	ON	ON	90	黑色
	Irated (mA)	Pin1			Pin2	tc (°C)																			
	900	OFF			OFF	88																			
950	OFF	ON	89																						
1000	ON	OFF	90																						
1050	ON	ON	90																						
2.	LC 44/900-1050/4 2 flexC T-W SNC4	LC 44/900-1050/42 flexC T-W SNC4、	输出: 500/600/700/800mA (恒流可调), Max. 59Vdc, 配套光源: Max. 33.6W LED模块	<table border="1"> <thead> <tr> <th>Irated (mA)</th> <th>Pin1</th> <th>Pin2</th> <th>tc (°C)</th> </tr> </thead> <tbody> <tr> <td>500</td> <td>OFF</td> <td>OFF</td> <td>65</td> </tr> <tr> <td>600</td> <td>OFF</td> <td>ON</td> <td>65</td> </tr> <tr> <td>700</td> <td>ON</td> <td>OFF</td> <td>65</td> </tr> <tr> <td>800</td> <td>ON</td> <td>ON</td> <td>70</td> </tr> </tbody> </table>	Irated (mA)	Pin1	Pin2	tc (°C)	500	OFF	OFF	65	600	OFF	ON	65	700	ON	OFF	65	800	ON	ON	70	白色
	Irated (mA)	Pin1			Pin2	tc (°C)																			
500	OFF	OFF			65																				
600	OFF	ON	65																						
700	ON	OFF	65																						
800	ON	ON	70																						
3.	LC 44/900-1050/4 2 flexC T-G SNC4	LC 44/900-1050/42 flexC T-G SNC4	输出: 250/300/350/400mA (恒流可调),	<table border="1"> <thead> <tr> <th>Irated (mA)</th> <th>Pin1</th> <th>Pin2</th> <th>tc(°C)</th> </tr> </thead> <tbody> <tr> <td>250</td> <td></td> <td></td> <td></td> </tr> <tr> <td>300</td> <td></td> <td></td> <td></td> </tr> <tr> <td>350</td> <td></td> <td></td> <td></td> </tr> <tr> <td>400</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Irated (mA)	Pin1	Pin2	tc(°C)	250				300				350				400				灰色
Irated (mA)	Pin1	Pin2			tc(°C)																				
250																									
300																									
350																									
400																									
4.	LC 34/500-800/42 flexC T-B SNC4	LC 34/500-800/42 flexC T-B SNC4、	输出: 250/300/350/400mA (恒流可调),	<table border="1"> <thead> <tr> <th>Irated (mA)</th> <th>Pin1</th> <th>Pin2</th> <th>tc(°C)</th> </tr> </thead> <tbody> <tr> <td>250</td> <td></td> <td></td> <td></td> </tr> <tr> <td>300</td> <td></td> <td></td> <td></td> </tr> <tr> <td>350</td> <td></td> <td></td> <td></td> </tr> <tr> <td>400</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Irated (mA)	Pin1	Pin2	tc(°C)	250				300				350				400				黑色
Irated (mA)	Pin1	Pin2			tc(°C)																				
250																									
300																									
350																									
400																									
5.	LC 34/500-800/42 flexC T-W SNC4	LC 34/500-800/42 flexC T-W SNC4、	输出: 250/300/350/400mA (恒流可调),	<table border="1"> <thead> <tr> <th>Irated (mA)</th> <th>Pin1</th> <th>Pin2</th> <th>tc(°C)</th> </tr> </thead> <tbody> <tr> <td>250</td> <td></td> <td></td> <td></td> </tr> <tr> <td>300</td> <td></td> <td></td> <td></td> </tr> <tr> <td>350</td> <td></td> <td></td> <td></td> </tr> <tr> <td>400</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Irated (mA)	Pin1	Pin2	tc(°C)	250				300				350				400				白色
Irated (mA)	Pin1	Pin2			tc(°C)																				
250																									
300																									
350																									
400																									
6.	LC 34/500-800/42 flexC T-G SNC4	LC 34/500-800/42 flexC T-G SNC4/	输出: 250/300/350/400mA (恒流可调),	<table border="1"> <thead> <tr> <th>Irated (mA)</th> <th>Pin1</th> <th>Pin2</th> <th>tc(°C)</th> </tr> </thead> <tbody> <tr> <td>250</td> <td></td> <td></td> <td></td> </tr> <tr> <td>300</td> <td></td> <td></td> <td></td> </tr> <tr> <td>350</td> <td></td> <td></td> <td></td> </tr> <tr> <td>400</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Irated (mA)	Pin1	Pin2	tc(°C)	250				300				350				400				灰色
Irated (mA)	Pin1	Pin2			tc(°C)																				
250																									
300																									
350																									
400																									
7.	LC 34/500-800/42 flexC T-GP4 SNC4	LC 34/500-800/42 flexC T-GP4 SNC4	输出: 250/300/350/400mA (恒流可调),	<table border="1"> <thead> <tr> <th>Irated (mA)</th> <th>Pin1</th> <th>Pin2</th> <th>tc(°C)</th> </tr> </thead> <tbody> <tr> <td>250</td> <td></td> <td></td> <td></td> </tr> <tr> <td>300</td> <td></td> <td></td> <td></td> </tr> <tr> <td>350</td> <td></td> <td></td> <td></td> </tr> <tr> <td>400</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Irated (mA)	Pin1	Pin2	tc(°C)	250				300				350				400				深灰色
Irated (mA)	Pin1	Pin2			tc(°C)																				
250																									
300																									
350																									
400																									
8.	LC 17/250-400/42 flexC T-B SNC4	LC 17/250-400/42 flexC T-B SNC4、	输出: 250/300/350/400mA (恒流可调),	<table border="1"> <thead> <tr> <th>Irated (mA)</th> <th>Pin1</th> <th>Pin2</th> <th>tc(°C)</th> </tr> </thead> <tbody> <tr> <td>250</td> <td></td> <td></td> <td></td> </tr> <tr> <td>300</td> <td></td> <td></td> <td></td> </tr> <tr> <td>350</td> <td></td> <td></td> <td></td> </tr> <tr> <td>400</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Irated (mA)	Pin1	Pin2	tc(°C)	250				300				350				400				黑色
Irated (mA)	Pin1	Pin2			tc(°C)																				
250																									
300																									
350																									
400																									



中国质量认证中心  
CHINA QUALITY CERTIFICATION CENTRE



# 产品认证证书


证书编号: CQC24010434901


第 2 页 / 共 2 页

本证书及附件应同时使用, 信息查验说明见证书页

纸号:

9.	LC 17/250-400/42 flexC T-W SNC4	LC 17/250-400/42 flexC T-W SNC4、	Max. 59Vdc, 配套光源: Max. 16.8W LED模块	250	OFF	OFF	60	白色
				300	OFF	ON	60	
				350	ON	OFF	60	
				400	ON	ON	60	
10.	LC 17/250-400/42 flexC T-G SNC4	LC 17/250-400/42 flexC T-G SNC4						灰色

输入: 220-240V~, 50/60Hz, IP20, II类, LED 控制装置 (SELV 输出), , 适宜直接安装在普通可燃材料表面

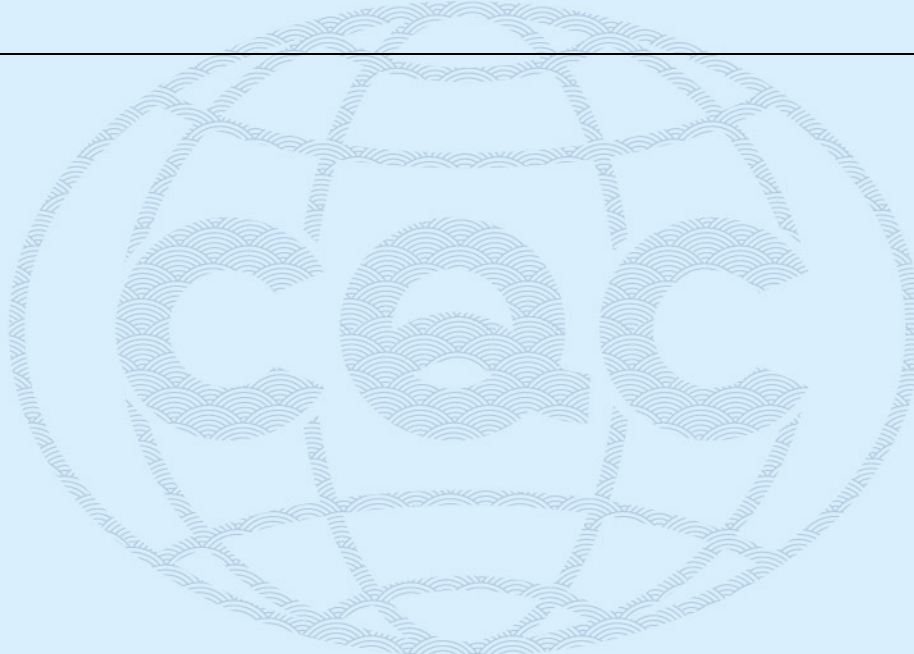

中国质量认证中心  
CHINA QUALITY CERTIFICATION CENTRE