

Sensors and Controls

basicDIM Wireless user interface Profiles



TRIDONIC

Information

With the basicDIM Wireless system, you have the possibility to change the behaviour of each device through different profiles. These profiles can be selected in the 4remote BT App. For more informations about how to change device profiles, please refer to the "4remote BT App product documentation".

The following list contains an overview and a more detailed description of every available basicDIM Wireless Profile in the 4remote BT App. Following abbreviations are used throughout the document:

Abbreviation:	Description:
BC	Broadcast (= all devices)
A0, A1, A2, ...	DALI Single address (= single devices)
G0, G1, G2, ...	DALI Group address (= groups of devices)

NOTICE

Profiles with the abbreviation "Evo:" are only compatible with Evolution networks, as these offer extended functionality.


NOTICE

All profiles are shared and can be copied by our customers.

NOTICE

The factory profile is the first profile in the profile list.

basicDIM Wireless User Interface

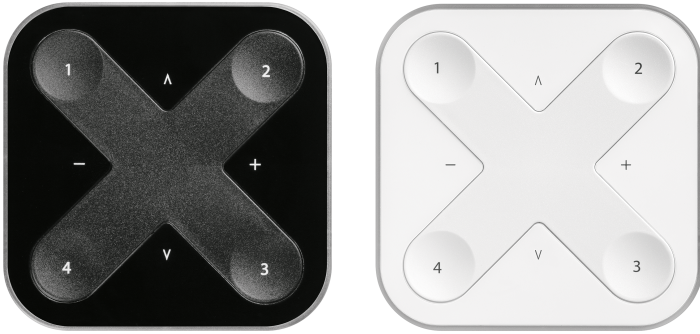

Profile:		Description:	Manual app control:		Connection sensors:	Push-button:	Visible in 4remote BT App:
5300	bDW (User Interface)	<p>Profile for the basicDIM Wireless push-button module. Possibility to freely configure buttons 1 - 4 in the 4remote BT App.</p> <p>Additional 4 buttons with fixed functionality:</p> <p>+: Dim up</p> <p>-: Dim down</p> <p>Arrow up: Change to warm colour temperature</p> <p>Arrow down: Change to cold colour temperature</p>	-	-	No	Yes, 4	Yes