

Module LLE FLEX 8mm 24V SNC5

Modules LLE FLEX essence



Product description

- _ Dimmable 24 V constant voltage LED flextape (SELV)
- _ Ideal for various lighting applications: indirect, accent and decorative lighting, ceiling integration, cove lighting and aluminium extrusions
- _ 1 reel = 5 m
- _ Made in Europe
- _ Long lifetime up to 102,000 hours
- _ 5 years guarantee (conditions at <https://www.tridonic.com/en/int/services/manufacturer-guarantee-conditions>)

Optical properties

- _ Colour temperature 2,700, 3,000, 4,000 K (6,500 K on demand)
- _ Useful luminous flux up to 2,749 lm/m at $t_p = 25\text{ }^\circ\text{C}$
- _ Efficacy of the LED module up to 161 lm/W at $t_p = 25\text{ }^\circ\text{C}$
- _ High colour rendering index CRI > 80 and CRI > 90
- _ Low colour temperature tolerances (MacAdam 3)

Mechanical properties

- _ High design freedom due to 5 cm cut-options and 140 LED light points per meter
- _ Self-adhesive 3M tape at the backside for simple mounting on different surfaces
- _ Available PCB to PCB and wire to PCB connectors for toolless handling and connection
- _ reel2reel – No solder joints on the tape, easy to separate and low length tolerances

System solution

- _ System solution in combination with Tridonic constant voltage LED driver (fixed output and dimmable)

Website

<http://www.tridonic.com/28006443>



Linear



High bay



Decorative



Downlights



Spotlights



Free-standing



Area




Floor | Wall



Street

Module LLE FLEX 8mm 24V SNC5

Modules LLE FLEX essence

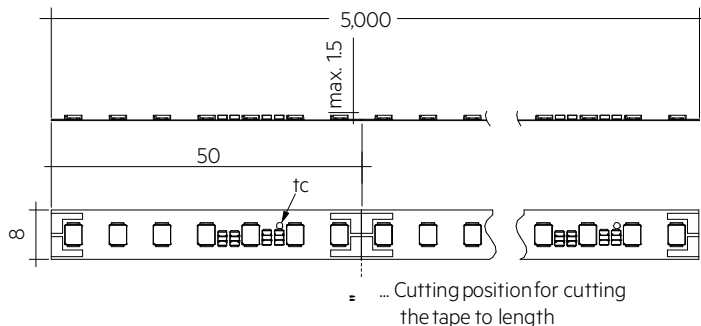

Ordering data

Type	Article number	Colour temperature	Packaging, carton	Weight per pc.
LLE FLEX 8mm 24V 3W 300lm 827 SNC5 R05	28006443	2,700 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 3W 300lm 830 SNC5 R05	28006444	3,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 3W 300lm 840 SNC5 R05	28006445	4,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 3W 300lm 865 SNC5 R05	28006446	6,500 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 5W 600lm 827 SNC5 R05	28006450	2,700 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 5W 600lm 830 SNC5 R05	28006451	3,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 5W 600lm 840 SNC5 R05	28006452	4,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 5W 600lm 865 SNC5 R05	28006453	6,500 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 9W 1200lm 827 SNC5 R05	28006465	2,700 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 9W 1200lm 830 SNC5 R05	28006466	3,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 9W 1200lm 840 SNC5 R05	28006467	4,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 9W 1200lm 865 SNC5 R05	28006468	6,500 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 13W 1800lm 827 SNC5 R05	28006480	2,700 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 13W 1800lm 830 SNC5 R05	28006481	3,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 13W 1800lm 840 SNC5 R05	28006482	4,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 13W 1800lm 865 SNC5 R05	28006483	6,500 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 19W 2500lm 827 SNC5 R05	28006495	2,700 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 19W 2500lm 830 SNC5 R05	28006496	3,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 19W 2500lm 840 SNC5 R05	28006497	4,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 19W 2500lm 865 SNC5 R05	28006498	6,500 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 6W 600lm 930 SNC5 R05	28006454	3,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 6W 600lm 940 SNC5 R05	28006455	4,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 11W 1200lm 930 SNC5 R05	28006469	3,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 11W 1200lm 940 SNC5 R05	28006470	4,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 16W 1800lm 930 SNC5 R05	28006484	3,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 16W 1800lm 940 SNC5 R05	28006485	4,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 22W 2500lm 930 SNC5 R05	28006499	3,000 K	1 pc(s).	0.071 kg
LLE FLEX 8mm 24V 22W 2500lm 940 SNC5 R05	28006500	4,000 K	1 pc(s).	0.071 kg

Technical data

Beam characteristic	120°
Ambient temperature t_a	-25 ... +50 °C
t_p rated	65 °C
t_c	75 °C
Supply voltage DC	24 V
Supply voltage range DC ^①	22.5 – 26.4 V
Max. working voltage for insulation SELV	60 V
Insulation test voltage	0.5 kV
Colour tolerance	3 SDCM
ESD classification	Severity level 1
Risk group (IEC 62471)	RG0
Classification acc. to IEC 62031	Built-in
Type of protection	IP00
Lumen maintenance L70B50	102,000 h
Guarantee (conditions at www.tridonic.com)	5 Year(s)

Approval marks**Standards**

IEC 62031, IEC 62471, IEC 62778, IEC 61547, IEC 61000-4-2, UL 8750

Specific technical data

Type	Article number	Photometric code	Useful luminous flux ϕ_v at $t_p = 25^\circ\text{C}$	Expected luminous flux at t_p rated ^③	Typ. current consumption I_n at t_p rated	Power consumption P_{on} at $t_p = 25^\circ\text{C}$ ^④	Efficacy of the module at $t_p = 25^\circ\text{C}$	Expected efficacy of the module at t_p rated	Colour rendering index CRI
LLE FLEX 8mm 24V 3W 300lm 827 SNC5 R05	28006443	827/359	318 lm/m	321 lm/m	100 mA/m	2.3 W/m	143 lm/W	134 lm/W	>80
LLE FLEX 8mm 24V 3W 300lm 830 SNC5 R05	28006444	830/359	328 lm/m	331 lm/m	100 mA/m	2.3 W/m	148 lm/W	138 lm/W	>80
LLE FLEX 8mm 24V 3W 300lm 840 SNC5 R05	28006445	840/359	354 lm/m	357 lm/m	100 mA/m	2.3 W/m	159 lm/W	149 lm/W	>80
LLE FLEX 8mm 24V 3W 300lm 865 SNC5 R05	28006446	865/359	358 lm/m	360 lm/m	100 mA/m	2.3 W/m	161 lm/W	150 lm/W	>80
LLE FLEX 8mm 24V 5W 600lm 827 SNC5 R05	28006450	827/359	662 lm/m	664 lm/m	208 mA/m	4.7 W/m	143 lm/W	133 lm/W	>80
LLE FLEX 8mm 24V 5W 600lm 830 SNC5 R05	28006451	830/359	683 lm/m	685 lm/m	208 mA/m	4.7 W/m	148 lm/W	137 lm/W	>80
LLE FLEX 8mm 24V 5W 600lm 840 SNC5 R05	28006452	840/359	737 lm/m	738 lm/m	208 mA/m	4.7 W/m	160 lm/W	148 lm/W	>80
LLE FLEX 8mm 24V 5W 600lm 865 SNC5 R05	28006453	865/359	744 lm/m	745 lm/m	208 mA/m	4.7 W/m	161 lm/W	149 lm/W	>80
LLE FLEX 8mm 24V 9W 1200lm 827 SNC5 R05	28006465	827/359	1,188 lm/m	1,192 lm/m	380 mA/m	8.5 W/m	141 lm/W	131 lm/W	>80
LLE FLEX 8mm 24V 9W 1200lm 830 SNC5 R05	28006466	830/359	1,226 lm/m	1,230 lm/m	380 mA/m	8.5 W/m	146 lm/W	135 lm/W	>80
LLE FLEX 8mm 24V 9W 1200lm 840 SNC5 R05	28006467	840/359	1,322 lm/m	1,327 lm/m	380 mA/m	8.5 W/m	157 lm/W	146 lm/W	>80
LLE FLEX 8mm 24V 9W 1200lm 865 SNC5 R05	28006468	865/359	1,334 lm/m	1,339 lm/m	380 mA/m	8.5 W/m	158 lm/W	147 lm/W	>80
LLE FLEX 8mm 24V 13W 1800lm 827 SNC5 R05	28006480	827/359	1,696 lm/m	1,702 lm/m	553 mA/m	12.3 W/m	139 lm/W	128 lm/W	>80
LLE FLEX 8mm 24V 13W 1800lm 830 SNC5 R05	28006481	830/359	1,750 lm/m	1,757 lm/m	553 mA/m	12.3 W/m	143 lm/W	132 lm/W	>80
LLE FLEX 8mm 24V 13W 1800lm 840 SNC5 R05	28006482	840/359	1,887 lm/m	1,894 lm/m	553 mA/m	12.3 W/m	154 lm/W	143 lm/W	>80
LLE FLEX 8mm 24V 13W 1800lm 865 SNC5 R05	28006483	865/359	1,905 lm/m	1,912 lm/m	553 mA/m	12.3 W/m	156 lm/W	144 lm/W	>80
LLE FLEX 8mm 24V 19W 2500lm 827 SNC5 R05	28006495	827/359	2,447 lm/m	2,466 lm/m	824 mA/m	18.2 W/m	135 lm/W	125 lm/W	>80
LLE FLEX 8mm 24V 19W 2500lm 830 SNC5 R05	28006496	830/359	2,525 lm/m	2,545 lm/m	824 mA/m	18.2 W/m	139 lm/W	129 lm/W	>80
LLE FLEX 8mm 24V 19W 2500lm 840 SNC5 R05	28006497	840/359	2,723 lm/m	2,744 lm/m	824 mA/m	18.2 W/m	150 lm/W	139 lm/W	>80
LLE FLEX 8mm 24V 19W 2500lm 865 SNC5 R05	28006498	865/359	2,749 lm/m	2,770 lm/m	824 mA/m	18.2 W/m	152 lm/W	140 lm/W	>80
LLE FLEX 8mm 24V 6W 600lm 930 SNC5 R05	28006454	930/359	620 lm/m	617 lm/m	227 mA/m	5.1 W/m	123 lm/W	113 lm/W	>90
LLE FLEX 8mm 24V 6W 600lm 940 SNC5 R05	28006455	940/359	690 lm/m	687 lm/m	227 mA/m	5.1 W/m	137 lm/W	126 lm/W	>90
LLE FLEX 8mm 24V 11W 1200lm 930 SNC5 R05	28006469	930/359	1,272 lm/m	1,266 lm/m	476 mA/m	10.6 W/m	120 lm/W	111 lm/W	>90
LLE FLEX 8mm 24V 11W 1200lm 940 SNC5 R05	28006470	940/359	1,415 lm/m	1,409 lm/m	476 mA/m	10.6 W/m	134 lm/W	123 lm/W	>90
LLE FLEX 8mm 24V 16W 1800lm 930 SNC5 R05	28006484	930/359	1,746 lm/m	1,747 lm/m	670 mA/m	14.8 W/m	118 lm/W	109 lm/W	>90
LLE FLEX 8mm 24V 16W 1800lm 940 SNC5 R05	28006485	940/359	1,943 lm/m	1,944 lm/m	670 mA/m	14.8 W/m	132 lm/W	121 lm/W	>90
LLE FLEX 8mm 24V 22W 2500lm 930 SNC5 R05	28006499	930/359	2,425 lm/m	2,433 lm/m	960 mA/m	21.1 W/m	115 lm/W	106 lm/W	>90
LLE FLEX 8mm 24V 22W 2500lm 940 SNC5 R05	28006500	940/359	2,699 lm/m	2,707 lm/m	960 mA/m	21.1 W/m	128 lm/W	117 lm/W	>90

① Exceeding the max. operating voltage leads to an overload on the LLE FLEX. This may in turn result in a significant reduction in lifetime or even in destruction.


② Tolerance of useful light flux - 0 / + 15 %. Measurement uncertainty 10 %. Values given for 1 m LLE FLEX.

③ Measurement uncertainty 10 %. Values given for 1 m LLE FLEX. Based on calculation.

④ Tolerance of power consumption $P_{on} \pm 15$ %. Measurement uncertainty ± 5 %. Values given for 1 m LLE FLEX.

Connector for LLE FLEX


Accessory

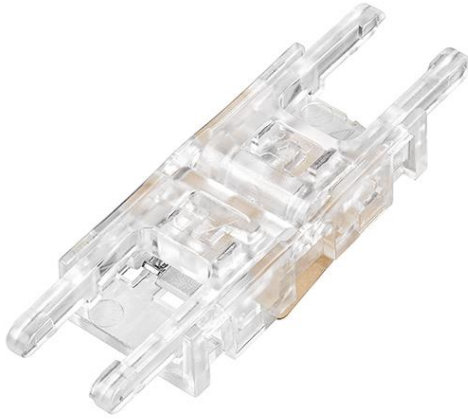**Product description**

- _ For connection of LLE FLEX module
- _ For internal wiring only (no strain relief functionality)
- _ Connector can be closed and re-opened easily: For assembly instructions see application note available at www.tridonic.com
- _ Glow wire test according to IEC 60695-2-11
- _ Max. 5 A in connection with LLE FLEX
- _ Urated = 24 – 48 V
- _ Wire cross section AWG 18

Website


<http://www.tridonic.com/28004985>

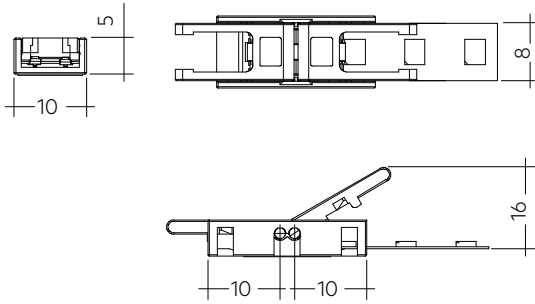**Ordering data**

Type	Article number	Packaging, carton	Weight per pc.
ACL flex connector Wire - PCB 100mm	28004985	20 pc(s).	0.004 kg
ACL flex connector Wire - PCB 500mm	28004986	20 pc(s).	0.020 kg
ACL flex connector Wire - PCB 2000mm	28004987	10 pc(s).	0.072 kg
ACL flex connector PCB - PCB	28004988	25 pc(s).	0.001 kg

ACL ALU PROFILE

Accessory

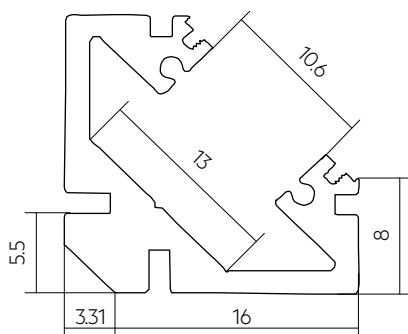**Product description**

- _ Aluminum LED profile in anodized silver color
- _ Ideal for surface mounting installation
- _ Easy to assembly and install with compatible covers and mounting accessories available
- _ Suitable for up to 8 mm width flexible strips
- _ Up to 30 W/m
- _ Made in Europe
- _ 5 years guarantee (conditions at <https://www.tridonic.com/en/int/services/manufacturer-guarantee-conditions>)

Mechanical properties

- _ Available profile length 2 m
- _ Compatible Tridonic covers

System solution

- _ System solution in combination with Tridonic LLE FLEX modules
- _ Fully system with Tridonic constant voltage drivers

Website


<http://www.tridonic.com/28005790>

**Ordering data**

Type	Article number	Colour	Length L	Maximum power	Packaging, carton	Weight per pc.
ACL ALU-PROFILE SURFACE 16x7MM L=2M	28005790	Silver	2,000 mm	20 W/m	72 pc(s).	0.238 kg
ACL ALU-PROFILE SURFACE 16X11MM L=2M	28005791	Silver	2,000 mm	30 W/m	96 pc(s).	0.284 kg
ACL ALU-PROFILE RECESSED 16X7.5MM L=2M	28005792	Silver	2,000 mm	15 W/m	128 pc(s).	0.276 kg
ACL ALU-PROFILE RECESSED 16X12MM L=2M	28005793	Silver	2,000 mm	20 W/m	96 pc(s).	0.332 kg
ACL ALU-PROFILE CORNER 16x18.5MM L=2M	28005794	Silver	2,000 mm	30 W/m	40 pc(s).	0.674 kg
ACL ALU-PROFILE FLEXIBLE 16X4MM L=2M	28005795	Silver	2,000 mm	15 W/m	270 pc(s).	0.118 kg

ACL PC COVER

Accessory

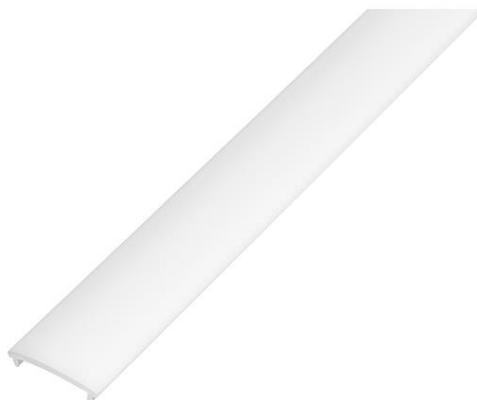**Product description**

- _ Polycarbonate cover in transparent or frosted finished surface
- _ Suitable for all Tridonic aluminum profiles
- _ Easy to assembly with click-on system
- _ Made in Europe
- _ 5 years guarantee (conditions at <https://www.tridonic.com/en/int/services/manufacturer-guarantee-conditions>)

Mechanical properties

- _ Available profile length 2 m
- _ Compatible Tridonic profiles

System solution

- _ System solution in combination with Tridonic LLE FLEX modules
- _ Fully system with Tridonic constant voltage drivers

Website

<http://www.tridonic.com/28005770>

**Ordering data**

Type	Article number	Colour	Length L	Packaging, carton	Weight per pc.
ACL PC-COVER OPAL L=2M	28005770	Opal	2,000 mm	1 pc(s).	0.044 kg
ACL PC-COVER TRANSPARENT L=2M	28005775	Transparent	2,000 mm	250 pc(s).	0.100 kg

ACL ENDCAP

Accessory

**Product description**

- _ Polycarbonate endcap with and without cable holes
- _ Suitable for Tridonic aluminum profiles
- _ Easy to assembly with click-on system
- _ 5 years guarantee (conditions at <https://www.tridonic.com/en/int/services/manufacturer-guarantee-conditions>)

Mechanical properties

- _ Compatible Tridonic profiles

System solution

- _ System solution in combination with Tridonic LLE FLEX modules
- _ Fully system with Tridonic constant voltage drivers

Website

<http://www.tridonic.com/28005776>



Ordering data

Type	Article number	Colour	Packaging, bag	Weight per pc.
ACL ENDCAP SURFACE 16X7MM	28005776	Grey	10 pc(s).	0.001 kg
ACL ENDCAP SURFACE WITH HOLE16X7MM	28005777	Grey	10 pc(s).	0.001 kg
ACL ENDCAP SURFACE 16X11MM	28005778	Grey	10 pc(s).	0.001 kg
ACL ENDCAP SURFACE WITH HOLE 16X11MM	28005779	Grey	10 pc(s).	0.001 kg
ACL ENDCAP RECESSED 16X7.5MM	28005780	Grey	10 pc(s).	0.001 kg
ACL ENDCAP RECESSED 16X12MM	28005781	Grey	10 pc(s).	0.001 kg
ACL ENDCAP CORNER	28005782	Grey	10 pc(s).	0.001 kg
ACL ENDCAP CORNER WITH HOLE	28005783	Grey	10 pc(s).	0.001 kg
ACL ENDCAP FLEXIBLE	28005784	Grey	10 pc(s).	0.001 kg
ACL ENDCAP FLEXIBLE WITH HOLE	28005785	Grey	10 pc(s).	0.001 kg

ACL MOUNTING CLIP

Accessory

**Product description**

- _ Suitable mounting clips for Tridonic aluminum profiles
- _ Easy to assembly with screws and click-on to the profile
- _ 5 years guarantee (conditions at <https://www.tridonic.com/en/int/services/manufacturer-guarantee-conditions>)

Mechanical properties

- _ Compatible Tridonic profiles

System solution

- _ System solution in combination with Tridonic LLE FLEX modules
- _ Fully system with Tridonic constant voltage drivers

Website

<http://www.tridonic.com/28005786>

**Ordering data**

Type	Article number	Colour	Packaging, bag	Weight per pc.
ACL MOUNTING CLIP 16X7/7.5MM	28005786	Stainless steel	10 pc(s).	0.002 kg
ACL MOUNTING CLIP 16X11/12MM	28005787	Stainless steel	10 pc(s).	0.001 kg
ACL MOUNTING CLIP CORNER	28005788	Stainless steel	10 pc(s).	0.001 kg
ACL MOUNTING CLIP FLEXIBLE	28005789	Transparent	10 pc(s).	0.001 kg

1. Standards

IEC 62031
IEC 62471
IEC 62778
IEC 61000-4-2
IEC 61547
UL 8750 (for CLASS2 circuits and dry locations)

1.1 Photometric code

Key for photometric code, e. g. 830 / 349

1 st digit	2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit
Code CRI	Colour temperature in Kelvin x 100	MacAdam initial	MacAdam after 25% of the lifetime (max.6000h)	Luminous flux after 25% of the lifetime (max.6000h)
7 70 – 79				Code Luminous flux
8 80 – 89				7 ≥ 70 %
9 ≥ 90				8 ≥ 80 % 9 ≥ 90 %

1.2 Risk group

Type	Risk group
LLE FLEX 8mm 24V SNC5	RGO

1.3 Energy classification

Type	Colour temperature	Energy classification	Energy consumption
LLE FLEX 8mm 24V 3W 300lm 827 SNC5 R05	2,700 K	E	3 kWh / 1,000 h
LLE FLEX 8mm 24V 3W 300lm 830 SNC5 R05	3,000 K	E	3 kWh / 1,000 h
LLE FLEX 8mm 24V 3W 300lm 840 SNC5 R05	4,000 K	D	3 kWh / 1,000 h
LLE FLEX 8mm 24V 3W 300lm 865 SNC5 R05	6,500 K	D	3 kWh / 1,000 h
LLE FLEX 8mm 24V 5W 600lm 827 SNC5 R05	2,700 K	E	5 kWh / 1,000 h
LLE FLEX 8mm 24V 5W 600lm 830 SNC5 R05	3,000 K	E	5 kWh / 1,000 h
LLE FLEX 8mm 24V 5W 600lm 840 SNC5 R05	4,000 K	D	5 kWh / 1,000 h
LLE FLEX 8mm 24V 5W 600lm 865 SNC5 R05	6,500 K	D	5 kWh / 1,000 h
LLE FLEX 8mm 24V 9W 1200lm 827 SNC5 R05	2,700 K	E	9 kWh / 1,000 h
LLE FLEX 8mm 24V 9W 1200lm 830 SNC5 R05	3,000 K	E	9 kWh / 1,000 h
LLE FLEX 8mm 24V 9W 1200lm 840 SNC5 R05	4,000 K	D	9 kWh / 1,000 h
LLE FLEX 8mm 24V 9W 1200lm 865 SNC5 R05	6,500 K	D	9 kWh / 1,000 h
LLE FLEX 8mm 24V 13W 1800lm 827 SNC5 R05	2,700 K	E	13 kWh / 1,000 h
LLE FLEX 8mm 24V 13W 1800lm 830 SNC5 R05	3,000 K	E	13 kWh / 1,000 h
LLE FLEX 8mm 24V 13W 1800lm 840 SNC5 R05	4,000 K	D	13 kWh / 1,000 h
LLE FLEX 8mm 24V 13W 1800lm 865 SNC5 R05	6,500 K	D	13 kWh / 1,000 h
LLE FLEX 8mm 24V 19W 2500lm 827 SNC5 R05	2,700 K	E	19 kWh / 1,000 h
LLE FLEX 8mm 24V 19W 2500lm 830 SNC5 R05	3,000 K	E	19 kWh / 1,000 h
LLE FLEX 8mm 24V 19W 2500lm 840 SNC5 R05	4,000 K	D	19 kWh / 1,000 h
LLE FLEX 8mm 24V 19W 2500lm 865 SNC5 R05	6,500 K	D	19 kWh / 1,000 h
LLE FLEX 8mm 24V 6W 600lm 930 SNC5 R05	3,000 K	E	6 kWh / 1,000 h
LLE FLEX 8mm 24V 6W 600lm 940 SNC5 R05	4,000 K	E	6 kWh / 1,000 h
LLE FLEX 8mm 24V 11W 1200lm 930 SNC5 R05	3,000 K	E	11 kWh / 1,000 h
LLE FLEX 8mm 24V 11W 1200lm 940 SNC5 R05	4,000 K	E	11 kWh / 1,000 h
LLE FLEX 8mm 24V 16W 1800lm 930 SNC5 R05	3,000 K	F	15 kWh / 1,000 h
LLE FLEX 8mm 24V 16W 1800lm 940 SNC5 R05	4,000 K	E	15 kWh / 1,000 h
LLE FLEX 8mm 24V 22W 2500lm 930 SNC5 R05	3,000 K	F	22 kWh / 1,000 h
LLE FLEX 8mm 24V 22W 2500lm 940 SNC5 R05	4,000 K	E	22 kWh / 1,000 h

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base <https://eprel.ec.europa.eu/>

2. Thermal details

2.1 tc point, ambient temperature and lifetime

The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For LLE a tp temperature of 65°C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-25...+75°C
---------------------	-------------

Operation only in non condensing environment.

Humidity during processing of the module should be between 30 to 70 %.

2.3 Thermal design and heat sink

The rated life of LED products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the LLE will be greatly reduced or the LLE may be destroyed.

2.4 Heat sink values

LLE FLEX 8mm 300lm 24V 8xx SNC5

ta	tp	R _{th, hs-a} ^①	Cooling area ^①
25°C	65°C	744.00 K/W	self cooling
35°C	65°C	557.95 K/W	self cooling
40°C	65°C	464.93 K/W	self cooling
45°C	65°C	371.91 K/W	self cooling
50°C	65°C	278.88 K/W	self cooling

LLE FLEX 8mm 600lm 24V 8xx SNC5

ta	tp	R _{th, hs-a} ^①	Cooling area ^①
25°C	65°C	242.39	self cooling
35°C	65°C	181.76	self cooling
40°C	65°C	151.44	4 cm ²
45°C	65°C	121.13	6 cm ²
50°C	65°C	90.81	7 cm ²

LLE FLEX 8mm 1200lm 24V 8xx SNC5

ta	tp	R _{th, hs-a} ^①	Cooling area ^①
25°C	65°C	204.94 K/W	self cooling
35°C	65°C	153.66 K/W	4 cm ²
40°C	65°C	128.02 K/W	5 cm ²
45°C	65°C	102.38 K/W	7 cm ²
50°C	65°C	76.74 K/W	9 cm ²

LLE FLEX 8mm 1800lm 24V 8xx SNC5

ta	tp	R _{th, hs-a} ^①	Cooling area ^①
25°C	65°C	146.60 K/W	5 cm ²
35°C	65°C	109.90 K/W	6 cm ²
40°C	65°C	91.56 K/W	7 cm ²
45°C	65°C	73.21 K/W	9 cm ²
50°C	65°C	54.86 K/W	12 cm ²

LLE FLEX 8mm 2500lm 24V 8xx SNC5

ta	tp	R _{th, hs-a} ^①	Cooling area ^①
25 °C	65 °C	90.46 K/W	7 cm ²
35 °C	65 °C	67.80 K/W	10 cm ²
40 °C	65 °C	56.47 K/W	12 cm ²
45 °C	65 °C	45.14 K/W	15 cm ²
50 °C	65 °C	33.81 K/W	20 cm ²

LLE FLEX 8mm 600lm 24V 9xx SNC5

ta	tp	R _{th, hs-a} ^①	Cooling area ^①
25 °C	65 °C	313.54 K/W	self cooling
35 °C	65 °C	235.11 K/W	self cooling
40 °C	65 °C	195.89 K/W	self cooling
45 °C	65 °C	156.68 K/W	4 cm ²
50 °C	65 °C	117.46 K/W	6 cm ²

LLE FLEX 8mm 1200lm 24V 9xx SNC5

ta	tp	R _{th, hs-a} ^①	Cooling area ^①
25 °C	65 °C	130.96 K/W	5 cm ²
35 °C	65 °C	98.17 K/W	7 cm ²
40 °C	65 °C	81.78 K/W	8 cm ²
45 °C	65 °C	65.39 K/W	10 cm ²
50 °C	65 °C	48.99 K/W	14 cm ²

LLE FLEX 8mm 1800lm 24V 9xx SNC5

ta	tp	R _{th, hs-a} ^①	Cooling area ^①
25 °C	65 °C	123.84 K/W	5 cm ²
35 °C	65 °C	92.84 K/W	7 cm ²
40 °C	65 °C	77.33 K/W	9 cm ²
45 °C	65 °C	61.83 K/W	11 cm ²
50 °C	65 °C	46.32 K/W	14 cm ²

LLE FLEX 8mm 2500lm 24V 9xx SNC5

ta	tp	R _{th, hs-a} ^①	Cooling area ^①
25 °C	65 °C	82.93 K/W	8 cm ²
35 °C	65 °C	62.15 K/W	11 cm ²
40 °C	65 °C	51.76 K/W	13 cm ²
45 °C	65 °C	41.37 K/W	16 cm ²
50 °C	65 °C	30.98 K/W	22 cm ²

^① Values for a single segment of the LLE FLEX (50 mm).

Notes

The module has to be mounted on a heat sink and operated within the specified temperature range.

The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation.

A heat transfer coefficient of 0,0015 is used for the calculation.

3. Installation / wiring**3.1 Electrical supply/choice of LED driver**

LLE modules from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED driver which complies with the relevant standards. The use of LED driver from Tridonic in combination with LLE modules guarantees the necessary protection for safe and reliable operation.

If a LED driver other than Tridonic is used, it must provide the following protection:

- SELV
- Short-circuit protection
- Overload protection
- Overtemperature protection



LLE modules must be supplied by a constant voltage LED driver. Operation with a constant current LED driver will lead to an irreversible damage of the module.

Wrong polarity can damage the LLE FLEX.

3.2 Mounting instruction

None of the components of the LLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

The LLE FLEX is separable each 50 mm with the full function of each segment.

Insulation must be ensured at the contact area of the segments (e. g. by using additional insulation in the area of the solder connection).

The fixing/cooling surface must be cleaned before installing the LLE FLEX modules to remove all dirt, dust and grease.

Prevent shear- or peel forces

Min. bending radius of the LLE FLEX is 2 cm.

For details see Application Note: www.tridonic.com



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.

Avoid corrosive atmosphere during usage and storage.

3.3 Soldering guidelines

The modules are suitable only for manual soldering (max. 275 °C, 2 seconds).

3.3 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

4.3 Switching capability

100,000 cycles

Tridonic test according to IEC 62717 Cl 10.3.3
30 s on / 30 s off at I_{max}

4. Lifetime

4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value.

L70 means that the LED module will give 70 % of its initial luminous flux. This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.

The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value. In addition the percentage of failed modules (fatal failure) is characterized by the C value.

The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

4.2 Lumen maintenance

LLE FLEX 8mm 24V 300lm SNC5
LLE FLEX 8mm 24V 600lm SNC5
LLE FLEX 8mm 24V 1200lm SNC5
LLE FLEX 8mm 24V 1800lm SNC5
LLE FLEX 8mm 24V 2500lm SNC5

Supply voltage	tp temperature	L90/B10	L90/B50	L80/B10	L80/B50	L70/B10	L70/B50
24 V	40 °C	41k h	47k h	82k h	100k h	>102k h	>102k h
	45 °C	41k h	47k h	82k h	100k h	>102k h	>102k h
	50 °C	41k h	47k h	82k h	100k h	>102k h	>102k h
	55 °C	41k h	47k h	82k h	100k h	>102k h	>102k h
	60 °C	35k h	40k h	70k h	85k h	>102k h	>102k h
	65 °C	35k h	40k h	70k h	85k h	>102k h	>102k h
	70 °C	35k h	40k h	70k h	85k h	>102k h	>102k h
	75 °C	35k h	40k h	70k h	85k h	>102k h	>102k h

L00C3 102 kh. At tp rated, based on 10 switching cycles per day.

6. Photometric characteristics

6.1 Coordinates and tolerances according to CIE 1931


The specified colour coordinates are measured integral by a current impulse with typical values of module and a duration of 100 ms.

The ambient temperature of the measurement is $t_a = 25^\circ\text{C}$.


The measurement tolerance of the colour coordinates are ± 0.01 .

2,700 K – CRI80

	x0	y0
Centre	0.4578	0.4088

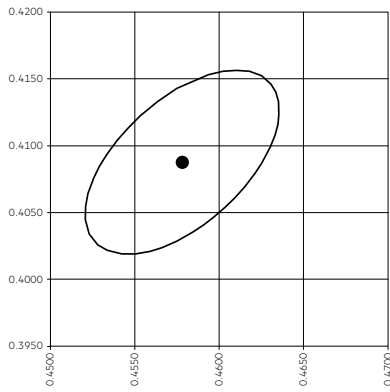


— MacAdam Ellipse: 3SDCM

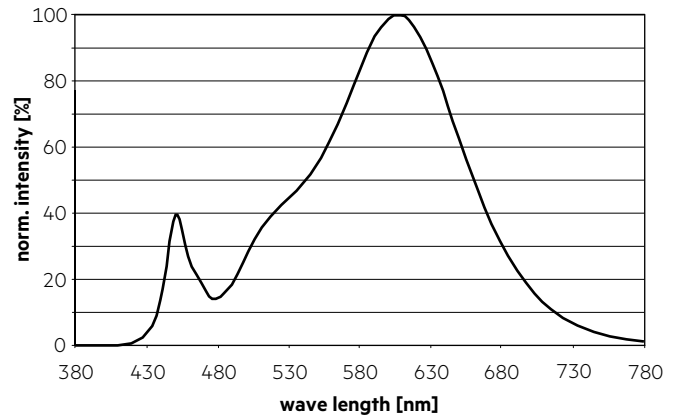


3,000 K – CRI80

	x0	y0
Centre	0.4340	0.4022

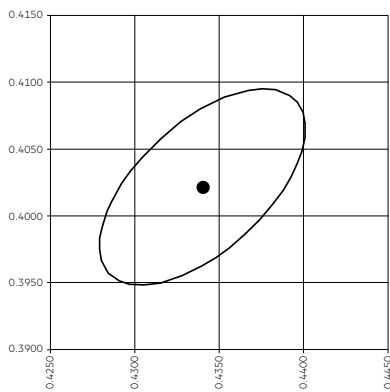


— MacAdam Ellipse: 3SDCM

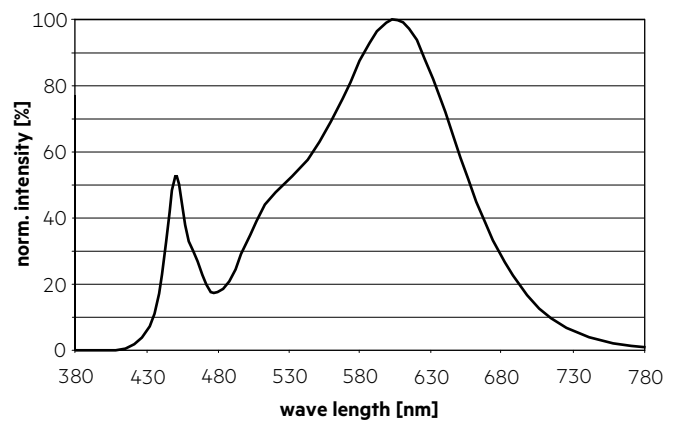


3,000 K - CRI90

	x0	y0
Centre	0.4334	0.4010

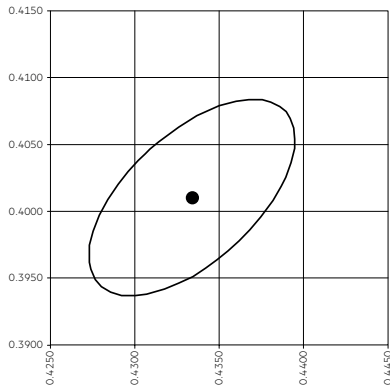


MacAdam Ellipse: 3SDCM

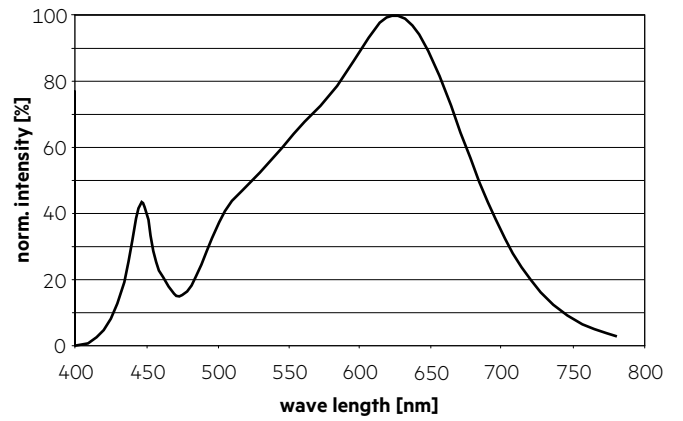


4,000 K - CRI80

	x0	y0
Centre	0.3819	0.3786

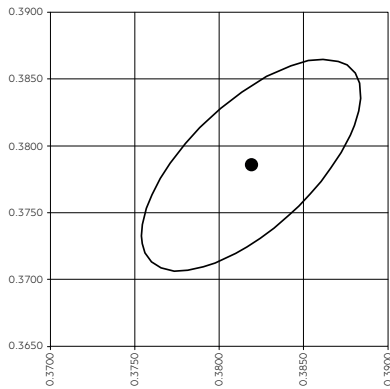


MacAdam Ellipse: 3SDCM

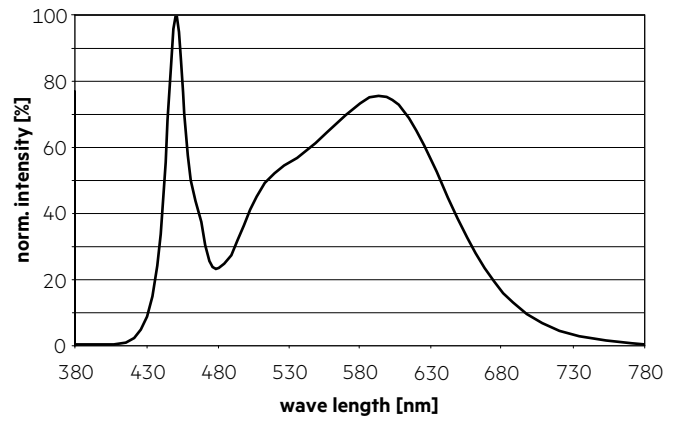


4,000 K - CRI90

	x0	y0
Centre	0.3813	0.3774

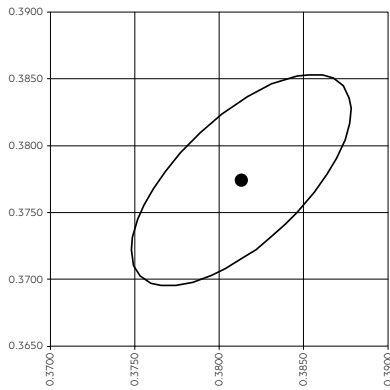


MacAdam Ellipse: 3SDCM

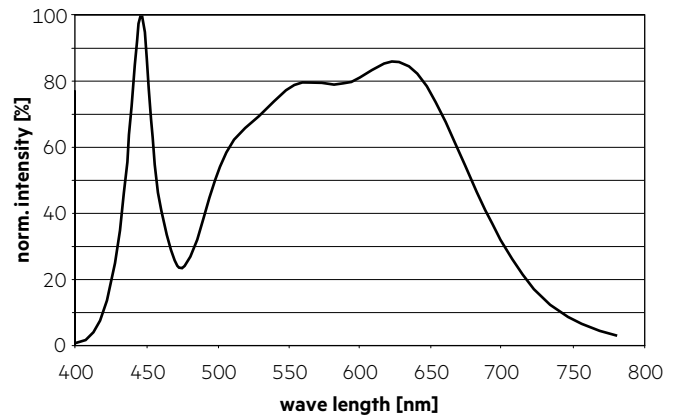


6,500 K – CRI80

	x0	y0
Centre	0.3124	0.3272

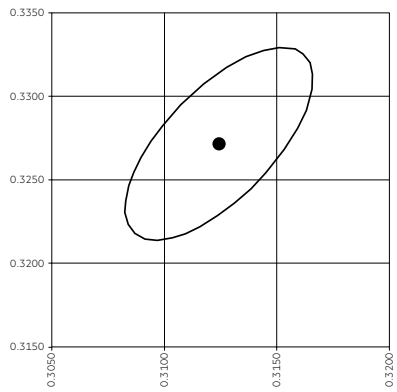


— MacAdam Ellipse: 3SDCM

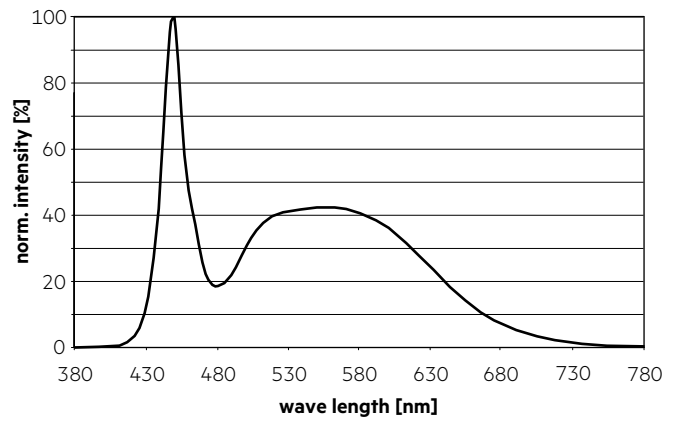

6.2 Light distribution

The optical design of the LLE product line ensures optimum homogeneity for the light distribution.

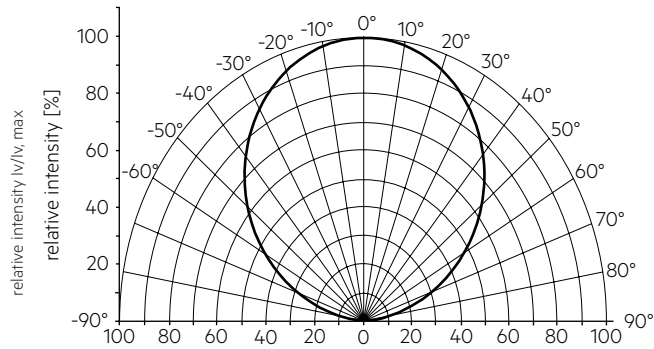


The colour temperature is measured over the complete module. To ensure an ideal mixture of colours and a homogeneous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 1.5 cm) should be used.


6.3 Relative luminous flux vs. LED tape length

The graphs show the luminous flux drop of the first compare to the last segment over the used tape length. Statistical values based on nominal supply voltage and tp rated.


LLE FLEX 8mm 24V 300lm xxx SNCS

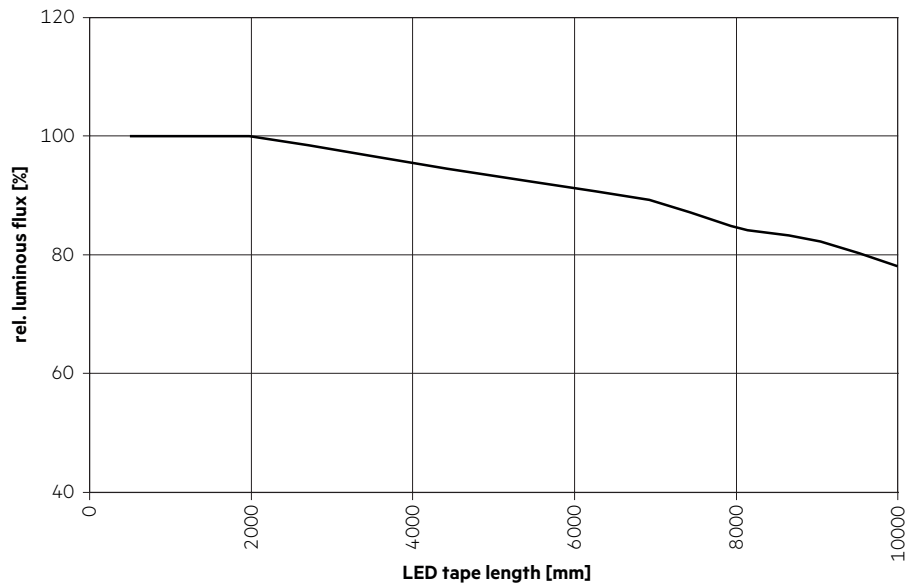


LLE FLEX 8mm 24V 600lm xxx SNC5

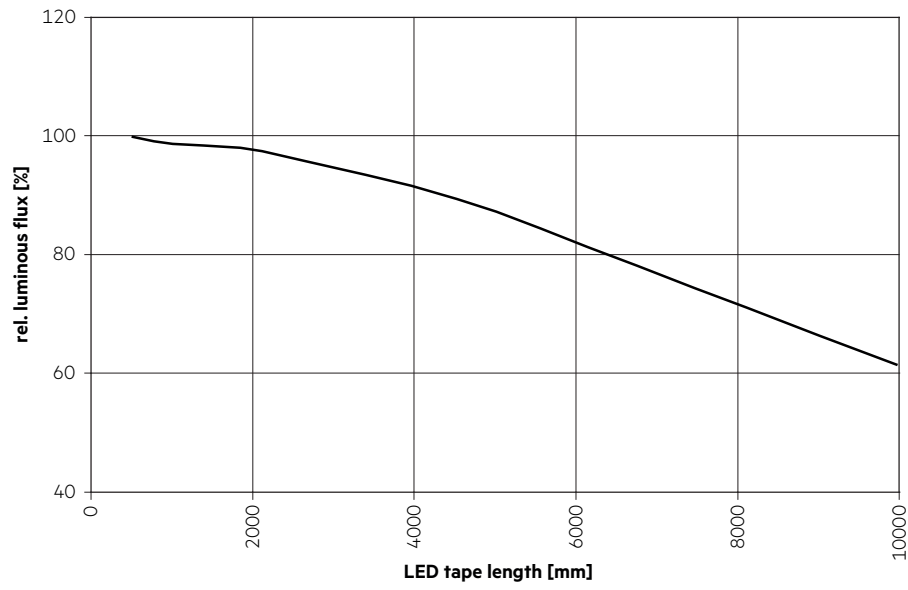


LLE FLEX 8mm 24V 1200lm xxx SNC5

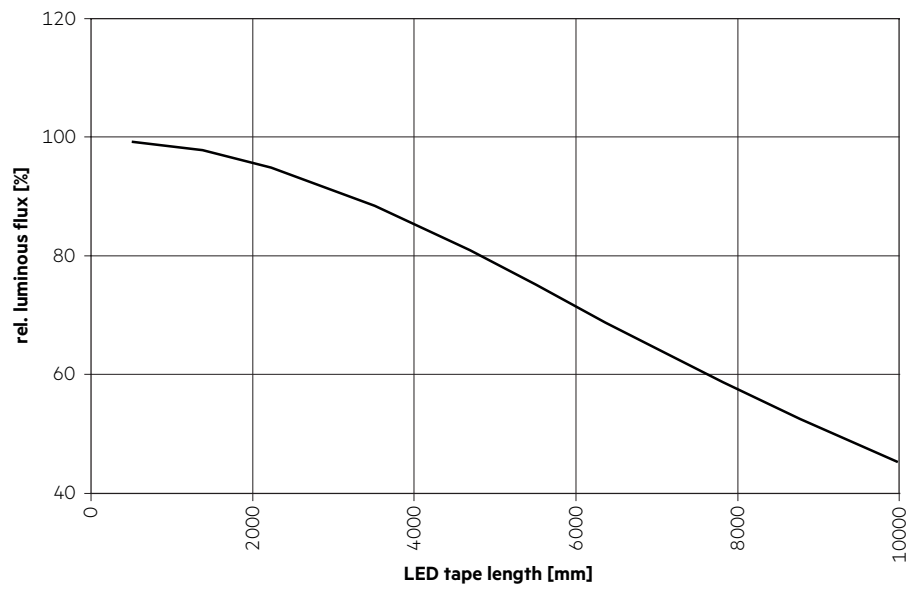


LLE FLEX 8mm 24V 1800lm xxx SNC5

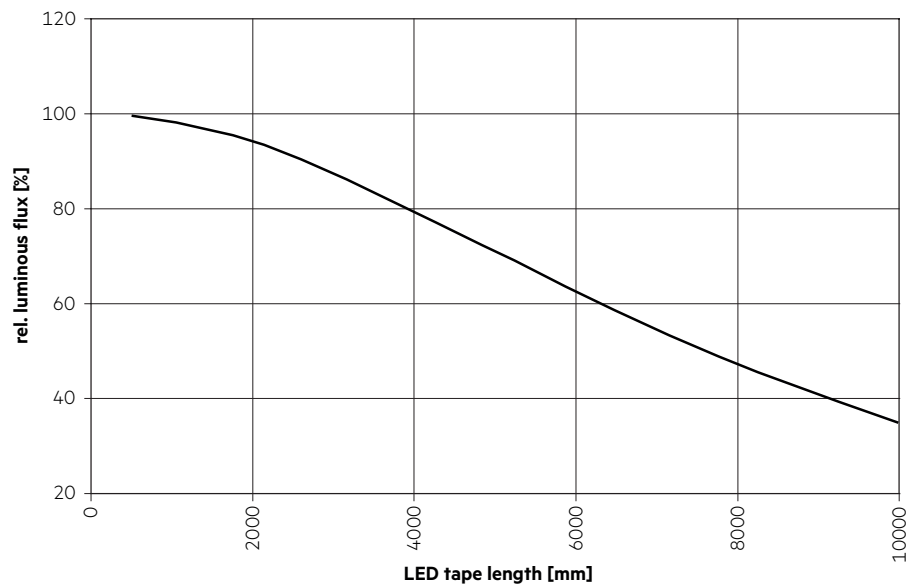

LLE FLEX 8mm 24V 2500lm xxx SNC5

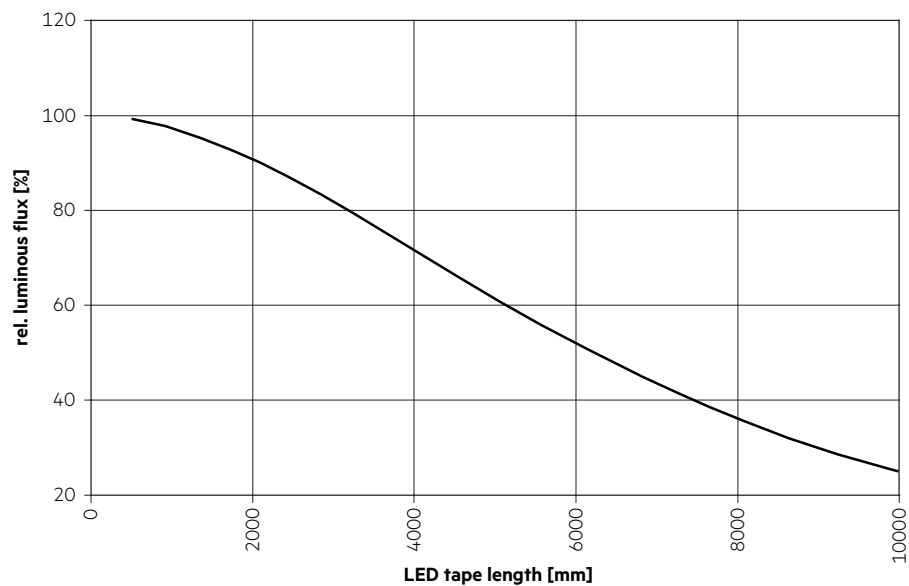

6.4 Relative luminous flux vs. tc temperature

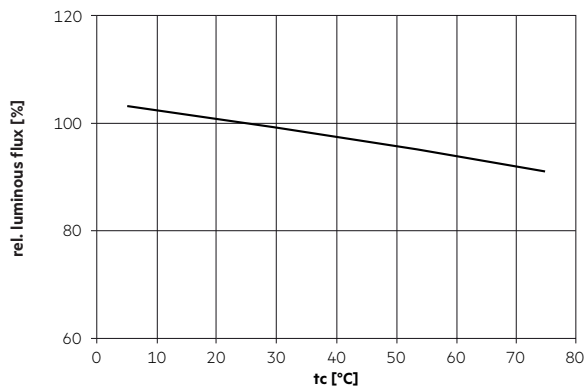

7. Miscellaneous

7.1 Additional information

Additional technical information at www.tridonic.com → Technical Data

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base <https://eprel.ec.europa.eu/>

Lifetime declarations are informative and represent no warranty claim.